


REME

*Leadership quality for furniture*

|                                        |         |
|----------------------------------------|---------|
| Single Extension PERFECT _____         | Page 08 |
| Self-close _____                       | Page 10 |
| Soft-close _____                       | Page 16 |
| Push-to-Open _____                     | Page 24 |
| Push-to-Open synchronization _____     | Page 28 |
| Offset hanging tab _____               | Page 32 |
|                                        |         |
| Single Extension PERFECT PEANUT® _____ | Page 36 |
| Soft-close _____                       | Page 38 |
| Push-to-Open _____                     | Page 42 |
|                                        |         |
| Single Extension PERFECT EB23 _____    | Page 44 |
| Soft-close _____                       | Page 46 |
| Push-to-Open _____                     | Page 52 |
| Peanut® _____                          | Page 56 |
|                                        |         |
| Full Extension EXTREME _____           | Page 58 |
| Self-close _____                       | Page 60 |
| Soft-close _____                       | Page 66 |
| Push-to-Open _____                     | Page 72 |
| Push-to-Open synchronization _____     | Page 76 |
|                                        |         |
| Full Extension EXTREME PEANUT® _____   | Page 80 |
| Soft-close _____                       | Page 82 |
| Push-to-Open _____                     | Page 86 |
|                                        |         |
| Ball bearing runners _____             | Page 88 |
| 17mm groove _____                      | Page 90 |
| 27mm groove _____                      | Page 94 |
| 37mm groove _____                      | Page 98 |

|                                                           |          |
|-----------------------------------------------------------|----------|
| Assembly instructions _____                               | Page 102 |
| Hole patterns and Drawer width _____                      | Page 104 |
| Lift Lock _____                                           | Page 106 |
| PEANUT® _____                                             | Page 112 |
| Coupling for PERFECT/EXTREME _____                        | Page 114 |
|                                                           |          |
| Alignment fitting _____                                   | Page 122 |
|                                                           |          |
| Connection fittings _____                                 | Page 126 |
|                                                           |          |
| Frame runner system _____                                 | Page 140 |
| Bottom thickness up to 14 mm, back panel continuous _____ | Page 142 |
| Bottom thickness up to 14-18 mm, bottom continuous _____  | Page 148 |
|                                                           |          |
| Packaging _____                                           | Page 154 |

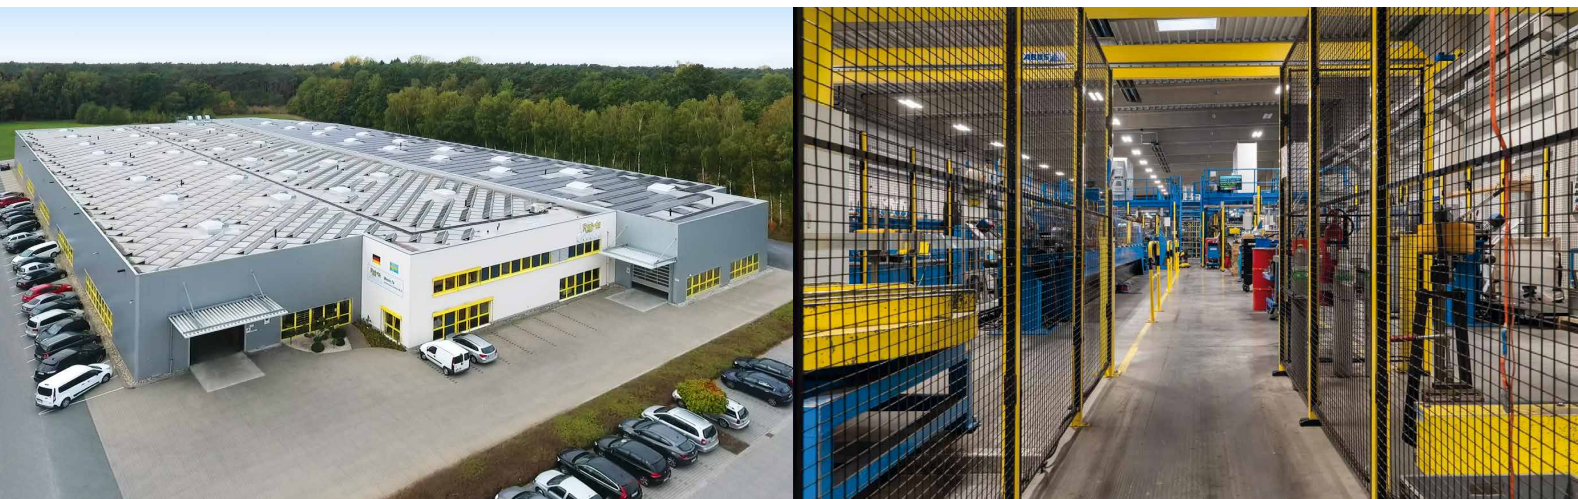

## **REME Möbelbeschläge GmbH**

For more than 30 years REME has been the competent partner for drawer runners Made in Germany. As a medium-sized family business based in Hövelhof – embedded in the industrially strong region of East Westphalia – we develop and manufacture drawer runners for the furniture industry at four plants.

We offer our customers a broad drawer portfolio – from standard runners to premium drawer slides, which we manufacture on self-designed state-of-the-art production lines.

Find out about our products now!

### Company

As a 3rd generation family business, acting responsibly is an integral part of our corporate culture. We take responsibility for our employees, for the quality of our products and for the impact of our business activities on society and the environment – with the aim of shaping a better future.

### Quality assurance

To ensure that machines and equipment in our plants meet our high-quality standards, we develop many of them by ourselves. With uniform inspection specifications and automated inspection stations, we manufacture large quantities in consistently high quality. We use a wide range of measuring equipment for our quality control – from simple callipers to state-of-the-art 3D measuring arms. Because we know how tough everyday furniture can be, we continuously simulate rigorous endurance and stress tests on our slides in our own test lab.

### Energy Management

The DIN EN ISO 50001 certification confirms that REME meets all the requirements of this standard and constantly controls and optimizes energy consumption. On the one hand, the improvements reduce energy consumption and production costs, on the other hand, they lead to lower CO2 emissions and thus reduce global climate change. With this certification, we commit ourselves to the continuous optimization of energy requirements and the resource-conserving use of non-renewable energy sources both in the production plants and in administration. Through this commitment, we assume responsibility for future generations as well as for environmental and climate protection.

### Sustainability

For REME, sustainability is the core prerequisite for long-term economic success. It creates the conditions for our company to increase its acceptance in society and to secure its future – and thus also the jobs of its employees – in the long term. Sustainable management therefore requires a balance between several aspects: Environmental protection, occupational safety, energy management, product innovation, quality assurance, employee care, customer care, plant maintenance, etc.

Last but not least, our employees play an important role in our economic success, which is why, especially as a family-owned company, we strive to create framework conditions for our employees that help them to balance their professional and private needs as well as possible. With our company health management, we strive to maintain the satisfaction of our employees. Our company suggestion scheme and improvement management promote new ideas and provide incentives for the internal optimization of processes.

### Icons

To give you a quick overview of what our products can do, we have developed icons that symbolise important features and functions.



Single Extension



Full Extension



Loading capacity up to 30 kg



Loading capacity up to 25 kg



Push-to-Open



Soft-close



Self-close



Installation width 23 mm



Peanut® connection technology



Frame heigth 80 mm



Frame heigth 120 mm



Frame heigth 150 mm





## Single Extension PERFECT

|                              |         |
|------------------------------|---------|
| Self-close                   | Page 10 |
| Soft-close                   | Page 16 |
| Push-to-Open                 | Page 24 |
| Push-to-Open Synchronization | Page 28 |
| Offset hanging tab           | Page 32 |

### Product

The star-shaped geometry of the PERFECT single extension runner skillfully absorbs incorrect loads. The overlapping of the star-shaped area ensures high rigidity, which also has a positive effect on the running properties. PERFECT therefore meets all functional requirements for wooden drawers in living and sleeping areas. The PERFECT single extension is available either as a fully-fledged standard version or as a shortened stub version.

### Variants

The PERFECT single extension is available with self-close, with soft-close and with push-to-open. The following options are available for attaching and detaching drawers: Plug-on assembly, 1D coupling and 2D coupling. The PERFECT single extension runner offers two anti-lift systems for drawer locking.


## Self-close and plug-on assembly



Technical drawing of the pump assembly showing dimensions in mm. The drawing includes a side view and a top view. Key dimensions are:

- Total height: 38,5
- Mounting bracket height: 31,6
- Bracket width: 1,8
- Bracket hole diameter: 9-10
- Bracket hole offset: 9,5
- Pump body width: 20
- Pump body depth: 15
- Pump body height: 22,2
- Pump body hole diameter: 11
- Pump body hole offset: 7
- Pump body hole diameter: Ø 7
- Pump body hole offset: max. 16

|                         |     |     |     |     |     |
|-------------------------|-----|-----|-----|-----|-----|
| Length cabinet runner A | 214 | 246 | 278 | 310 | 342 |
| Hole distance B         | 160 | 192 | 224 | 256 | 288 |

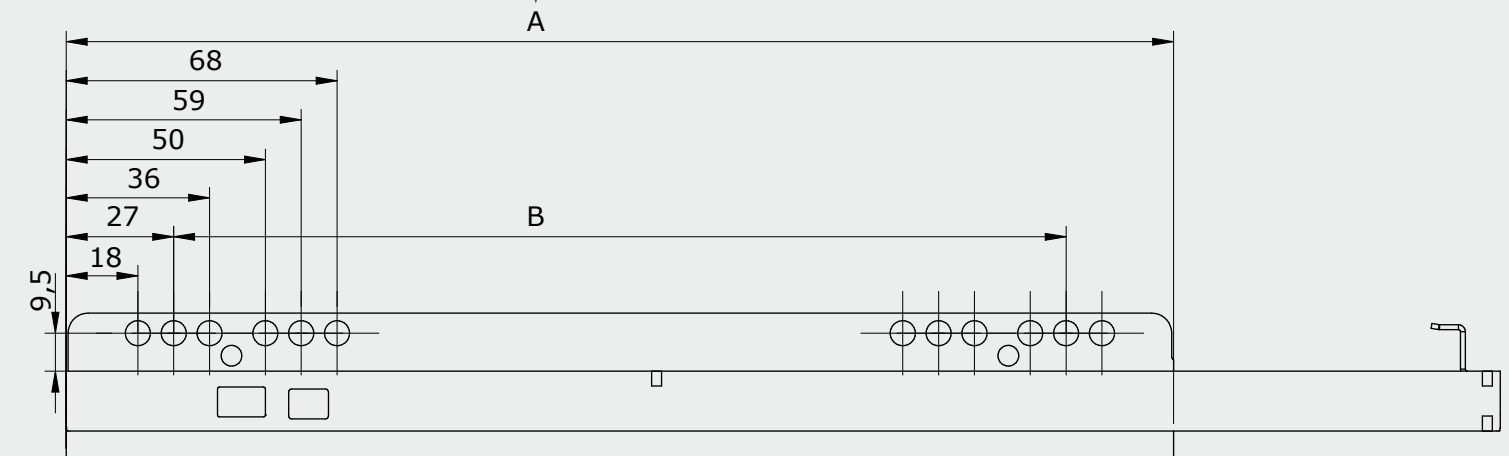

- Star-shaped profile
- Loading capacity up to 25 kg
- Lengths from 250 to 550 mm
- Quick plug-on assembly of the drawer
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- With self-close

Technical drawing of a rectangular frame assembly. The drawing shows a perspective view of a rectangular frame with dimensions and hole specifications. The frame is composed of four L-shaped sections. The dimensions are as follows:

- Top horizontal section: 45 mm length, 6 mm width.
- Right vertical section: 32 mm height, 17 mm width.
- Bottom horizontal section: 11 mm height, 17 mm width.
- Left vertical section: 11 mm height, 17 mm width.

The holes are specified as follows:

- Top horizontal section:  $\varnothing 6$  mm, 10 mm deep.
- Right vertical section:  $\varnothing 5$  mm, 10 mm deep for safety catch.
- Bottom horizontal section:  $\varnothing 7$  mm, 10 mm deep.

A circular inset shows a close-up of the safety catch mechanism, which is a small metal pin or bolt passing through the hole in the right vertical section.

Technical drawing of a mechanical part, likely a bracket or plate, showing dimensions and labels.

Dimensions:

- Overall width: 37<sup>0</sup><sub>-1</sub>
- Distance from left edge to center of first hole: 32
- Distance between centers of adjacent holes: 9
- Hole distance B (indicated by a dimension line across the top)
- Small dimension 1 (indicated by a dimension line at the bottom left)

Labels:

- Hole distance B

The drawing shows a top view of the part with a central horizontal slot, a series of holes along the top edge, and a small circular feature near the center. The part is shown in a perspective view with a dashed line indicating the hidden edge.

| Drawer length<br>in mm | Cabinet runner<br>in mm | Drawer runner<br>in mm | Self-close | Runners/Box | Boxes/Pallet<br>maximum | Pieces/Pallet<br>maximum | Weight/Pallet<br>maximum | Order number<br>left side | Order number<br>right side |
|------------------------|-------------------------|------------------------|------------|-------------|-------------------------|--------------------------|--------------------------|---------------------------|----------------------------|
| 250                    | 214                     | 260                    | x          | 40          | 45                      | 1800                     | 616                      | 3212501001500             | 3222501001500              |
| 300                    | 246                     | 310                    | x          | 40          | 35                      | 1400                     | 555                      | 3213001001500             | 3223001001500              |
| 350                    | 246                     | 360                    | x          | 40          | 35                      | 1400                     | 583                      | 3213501001500             | 3223501001500              |
| 400                    | 278                     | 410                    | x          | 32          | 42                      | 1344                     | 626                      | 3214001001500             | 3224001001500              |
| 450                    | 310                     | 460                    | x          | 32          | 42                      | 1344                     | 697                      | 3214501001500             | 3224501001500              |
| 500                    | 342                     | 510                    | x          | 32          | 30                      | 960                      | 549                      | 3215001001500             | 3225001001500              |
| 550                    | 342                     | 560                    | x          | 32          | 30                      | 960                      | 572                      | 3215501001500             | 3225501001500              |

## Stub, Self-close, plug-on assembly and Lift Lock

[illegible]

- Star-shaped profile
- Loading capacity up to 25 kg
- Lengths from 250 to 550 mm
- Quick plug-on assembly of the drawer
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- With self-close
- Stub version
- With pre-assembled safety catch

Technical drawing of a rectangular frame assembly. The drawing includes the following dimensions and callouts:

- HA Drilling (Dimension C)**: Points to a hole in the top rail.
- Ø 5 mm 10 mm deep for safety catch**: Points to a hole in the top rail.
- Ø 7 mm 10 mm deep**: Points to a hole in the side rail.
- Ø 6 mm 10 mm deep**: Points to a hole in the bottom rail.
- Dimensions**:
  - 11**: Vertical dimension of the side rail.
  - 7**: Horizontal dimension of the side rail.
  - 6**: Horizontal dimension of the top rail.
  - 4**: Horizontal dimension of the top rail.
  - 24**: Horizontal dimension of the top rail.
  - 17**: Horizontal dimension of the bottom rail.
- Inset Image**: A circular inset showing a detail of a safety catch mechanism.

[illegible]


| Drawer length<br>in mm | Cabinet runner<br>in mm | Drawer runner<br>in mm | HA Drilling<br>(Dimension C) | Self-close | Runners/Box | Boxes/Pallet<br>maximum | Pieces/Pallet<br>maximum | Weight/Pallet<br>maximum | Order number<br>left side | Order number<br>right side |
|------------------------|-------------------------|------------------------|------------------------------|------------|-------------|-------------------------|--------------------------|--------------------------|---------------------------|----------------------------|
| 250                    | 214                     | 220,5                  | 61,5                         | x          | 40          | 45                      | 1800                     | 585                      | 3212501021200             | 3222501021200              |
| 300                    | 246                     | 220,5                  | 111,5                        | x          | 40          | 35                      | 1400                     | 502                      | 3213001021200             | 3223001021200              |
| 350                    | 246                     | 253,5                  | 128,5                        | x          | 40          | 35                      | 1400                     | 521                      | 3213501021200             | 3223501021200              |
| 400                    | 278                     | 281,5                  | 150,5                        | x          | 32          | 42                      | 1344                     | 555                      | 3214001021200             | 3224001021200              |
| 450                    | 310                     | 315,5                  | 166,5                        | x          | 32          | 42                      | 1344                     | 619                      | 3214501021200             | 3224501021200              |
| 500                    | 342                     | 341,5                  | 190,5                        | x          | 32          | 30                      | 960                      | 486                      | 3215001021200             | 3225001021200              |
| 550                    | 342                     | 370,5                  | 211,5                        | x          | 32          | 30                      | 960                      | 498                      | 3215501021200             | 3225501021200              |

# Single Extension PERFECT


Self-close and coupling



## Installation Dimensions

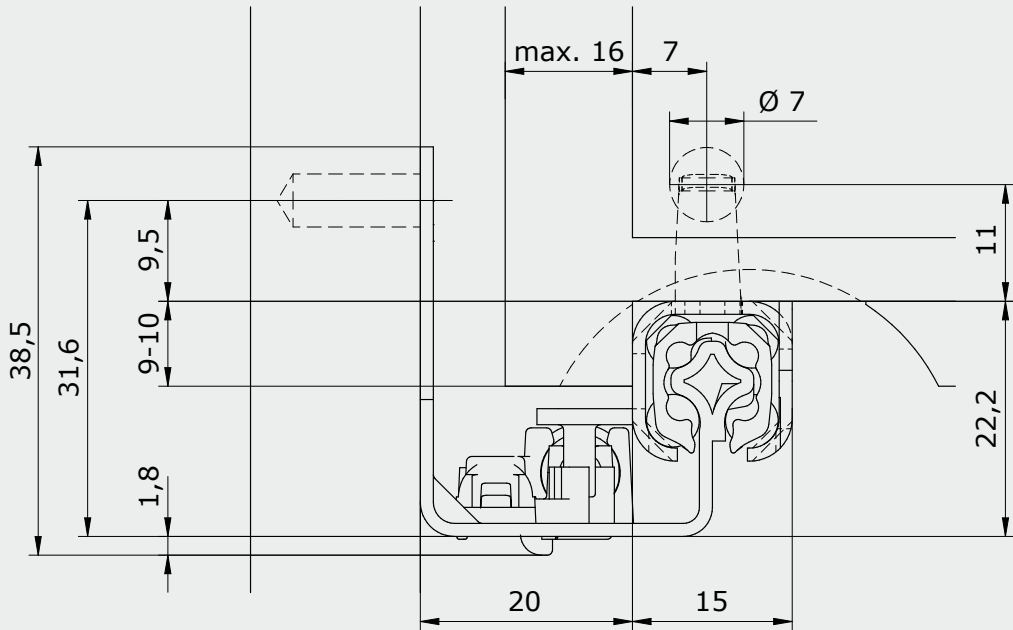

## Length and hole pattern of the cabinet runner

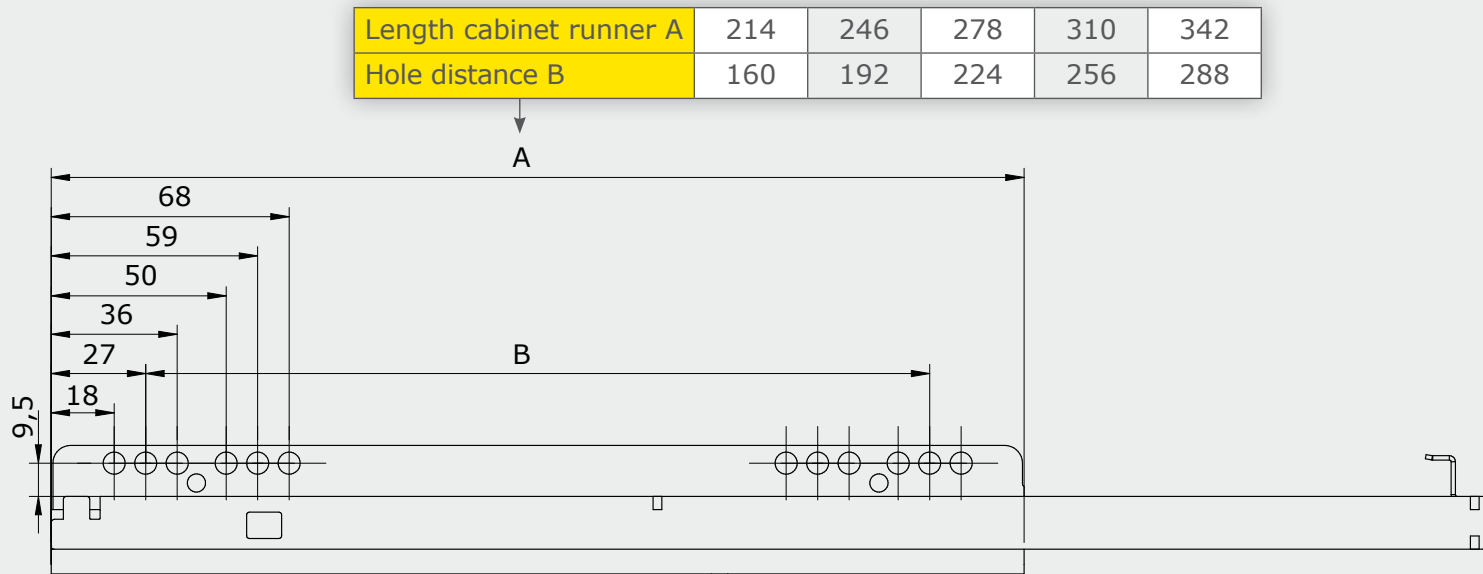


## Features


- Star-shaped profile
- Loading capacity up to 25 kg
- Lengths from 250 to 550 mm
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- With self-close
- Optionally with 1D or 2D coupling

## Coupling technology

The types of couplings make the mounting and demounting of drawers quick and easy. All in one: safety catch, coupling and alignment. Available either as 1D (height adjustment), or 2D (height and side adjustment). A precise joint pattern can be achieved quickly, easily and without tools.

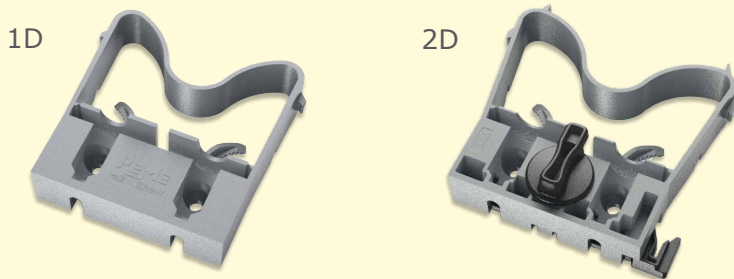

## Drillings in the cabinet

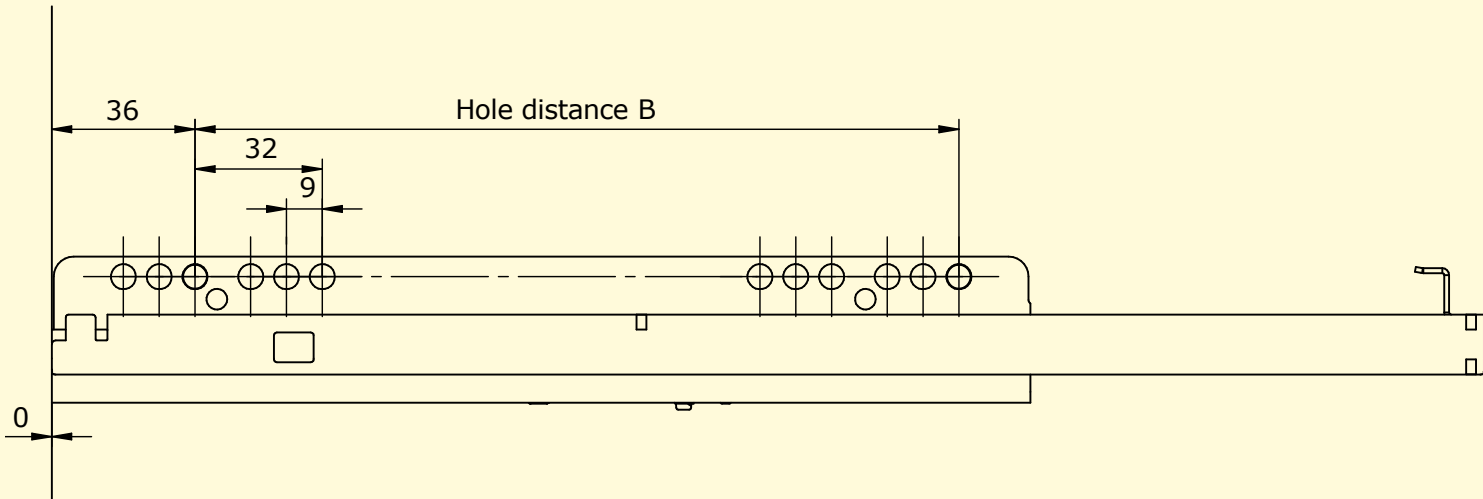


| Drawer length in mm | Cabinet runner in mm | Drawer runner in mm | Self-close | Runners/Box | Boxes/Pallet maximum | Pieces/Pallet maximum | Weight/Pallet maximum | Order number left side | Order number right side |
|---------------------|----------------------|---------------------|------------|-------------|----------------------|-----------------------|-----------------------|------------------------|-------------------------|
| 250                 | 214                  | 260                 | x          | 40          | 45                   | 1800                  | 601                   | 3212501001100          | 3222501001000           |
| 300                 | 246                  | 310                 | x          | 40          | 35                   | 1400                  | 544                   | 3213001001100          | 3223001001000           |
| 350                 | 246                  | 360                 | x          | 40          | 35                   | 1400                  | 573                   | 3213501001100          | 3223501001000           |
| 400                 | 278                  | 410                 | x          | 32          | 42                   | 1344                  | 619                   | 3214001001100          | 3224001001000           |
| 450                 | 310                  | 460                 | x          | 32          | 42                   | 1344                  | 691                   | 3214501001100          | 3224501001000           |
| 500                 | 342                  | 510                 | x          | 32          | 30                   | 960                   | 548                   | 3215001001100          | 3225001001000           |
| 550                 | 342                  | 560                 | x          | 32          | 30                   | 960                   | 567                   | 3215501001100          | 3225501001000           |

## Soft-close and plug-on assembly



**REME**

|                         |     |     |     |     |     |
|-------------------------|-----|-----|-----|-----|-----|
| Length cabinet runner A | 214 | 246 | 278 | 310 | 342 |
| Hole distance B         | 160 | 192 | 224 | 256 | 288 |

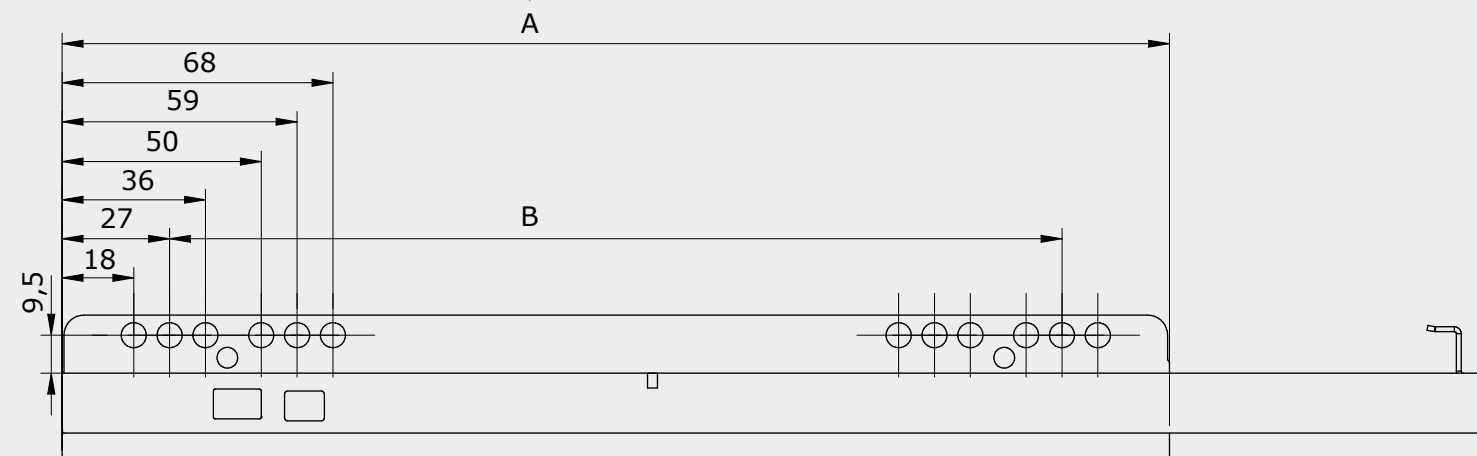

- Star-shaped profile
- Loading capacity up to 25 kg
- Lengths from 250 to 550 mm
- Quick plug-on assembly of the drawer
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- With soft-close


Technical drawing of a rectangular frame structure. The drawing shows a perspective view of a frame with dimensions and callouts for specific features:

- Dimensions:**
  - Top edge: 45
  - Right edge: 32
  - Left edge: 11
  - Bottom edge: 17
  - Inner width: 6
  - Inner height: 7
- Callouts:**
  - $\varnothing 6$  mm, 10 mm deep (pointing to a hole on the right edge)
  - $\varnothing 7$  mm, 10 mm deep (pointing to a hole on the bottom edge)
  - $\varnothing 5$  mm, 10 mm deep for safety catch (pointing to a hole on the right edge, with a circular inset showing a detail of the catch mechanism)


[illegible]

| Drawer length<br>in mm | Cabinet runner<br>in mm | Drawer runner<br>in mm | Soft-close | Runners/Box | Boxes/Pallet<br>maximum | Pieces/Pallet<br>maximum | Weight/Pallet<br>maximum | Order number<br>left side | Order number<br>right side |
|------------------------|-------------------------|------------------------|------------|-------------|-------------------------|--------------------------|--------------------------|---------------------------|----------------------------|
| 250                    | 214                     | 260                    | x          | 40          | 45                      | 1800                     | 616                      | 3212502011500             | 3222502011500              |
| 300                    | 246                     | 310                    | x          | 40          | 35                      | 1400                     | 555                      | 3213002011500             | 3223002011500              |
| 350                    | 246                     | 360                    | x          | 40          | 35                      | 1400                     | 583                      | 3213502011500             | 3223502011500              |
| 400                    | 278                     | 410                    | x          | 32          | 42                      | 1344                     | 626                      | 3214002011500             | 3224002011500              |
| 450                    | 310                     | 460                    | x          | 32          | 42                      | 1344                     | 697                      | 3214502011500             | 3224502011500              |
| 500                    | 342                     | 510                    | x          | 32          | 30                      | 960                      | 549                      | 3215002011500             | 3225002011500              |
| 550                    | 342                     | 560                    | x          | 32          | 30                      | 960                      | 572                      | 3215502011500             | 3225502011500              |

Installation Dimensions

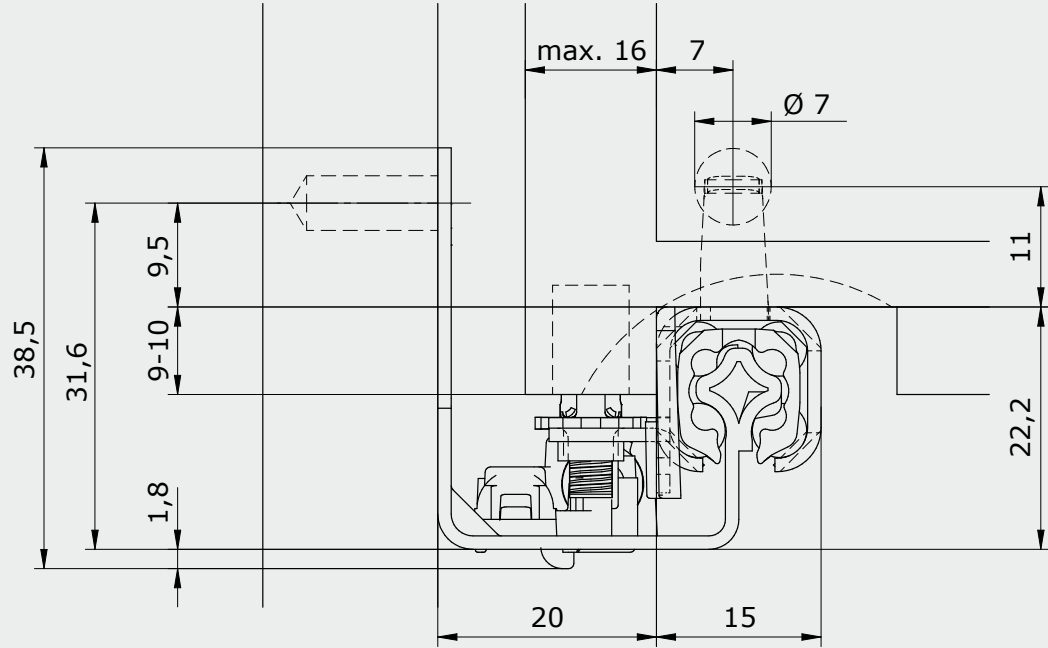


Length and hole pattern of the cabinet runner

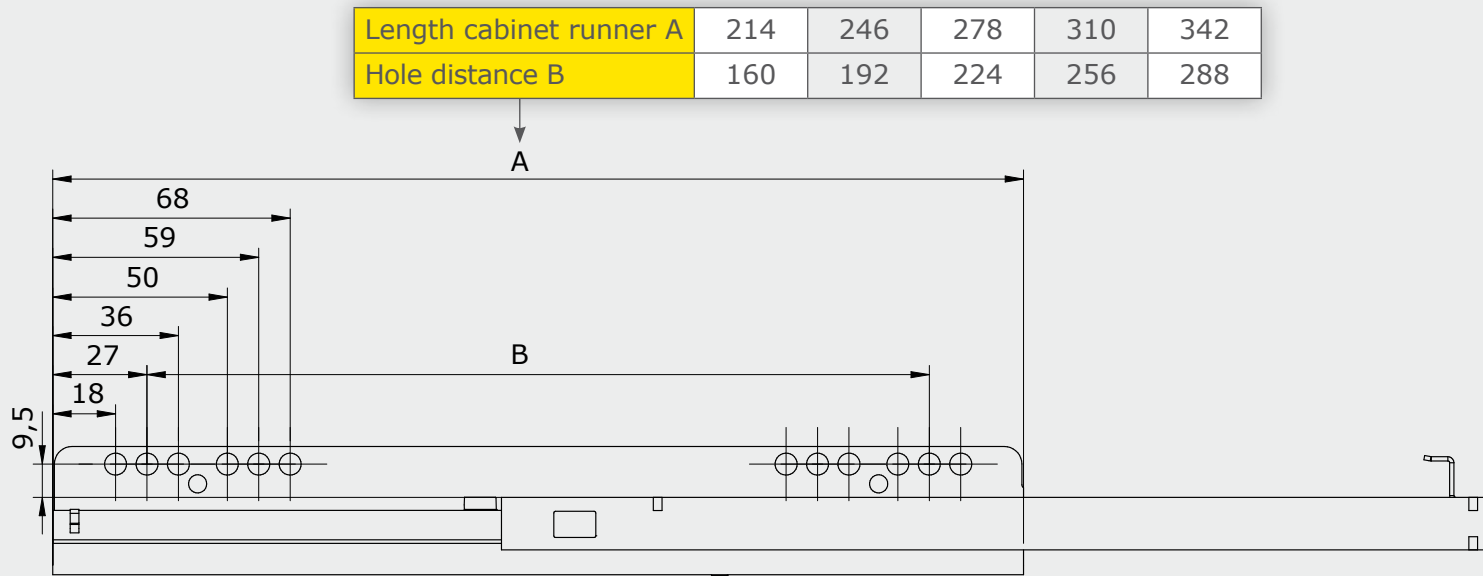


Features

- Star-shaped profile
- Loading capacity up to 25 kg
- Lengths from 250 to 550 mm
- Quick plug-on assembly of the drawer
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- With soft-close
- Stub version
- With pre-assembled safety catch

Drillings and cut-outs

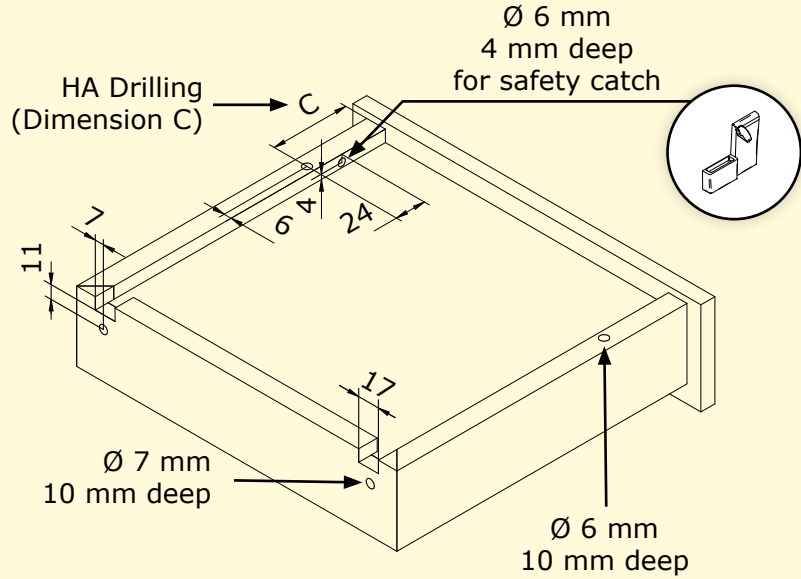


Drillings in the cabinet

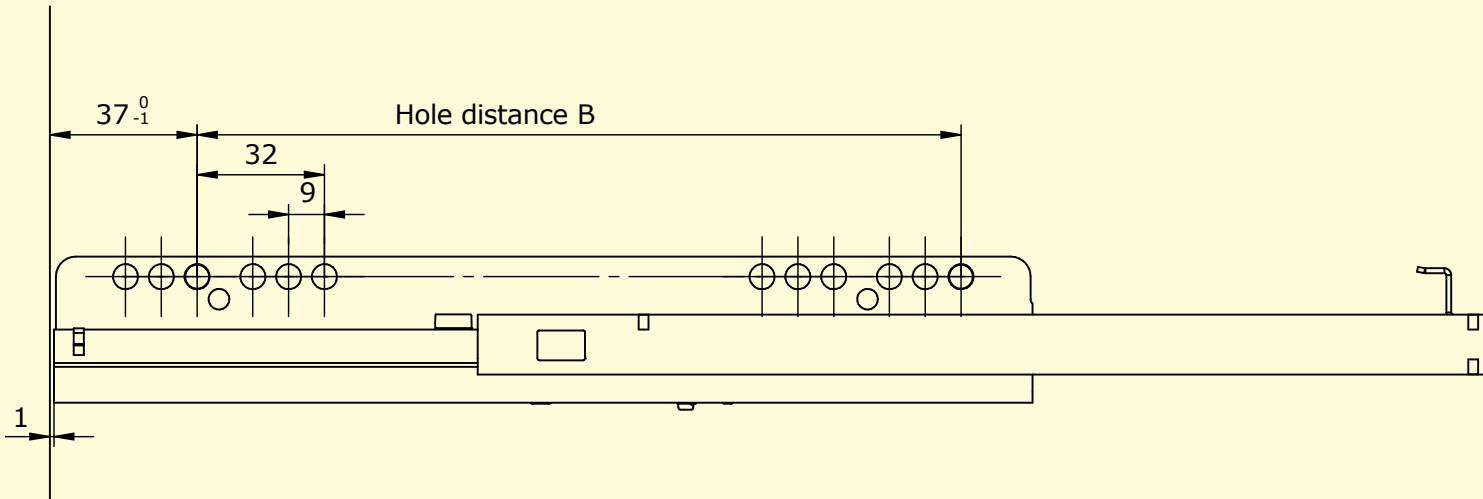


| Drawer length in mm | Cabinet runner in mm | Drawer runner in mm | HA Drilling (Dimension C) | Soft-close | Runners/Box | Boxes/Pallet maximum | Pieces/Pallet maximum | Weight/Pallet maximum | Order number left side | Order number right side |
|---------------------|----------------------|---------------------|---------------------------|------------|-------------|----------------------|-----------------------|-----------------------|------------------------|-------------------------|
| 250                 | 214                  | 220,5               | 61,5                      | x          | 40          | 45                   | 1800                  | 585                   | 3212502031200          | 3222502031200           |
| 300                 | 246                  | 220,5               | 111,5                     | x          | 40          | 35                   | 1400                  | 502                   | 3213002031200          | 3223002031200           |
| 350                 | 246                  | 253,5               | 128,5                     | x          | 40          | 35                   | 1400                  | 521                   | 3213502031200          | 3223502031200           |
| 400                 | 278                  | 281,5               | 150,5                     | x          | 32          | 42                   | 1344                  | 555                   | 3214002031200          | 3224002031200           |
| 450                 | 310                  | 315,5               | 166,5                     | x          | 32          | 42                   | 1344                  | 619                   | 3214502031200          | 3224502031200           |
| 500                 | 342                  | 341,5               | 190,5                     | x          | 32          | 30                   | 960                   | 486                   | 3215002031200          | 3225002031200           |
| 550                 | 342                  | 370,5               | 211,5                     | x          | 32          | 30                   | 960                   | 498                   | 3215502031200          | 3225502031200           |

### Installation Dimensions

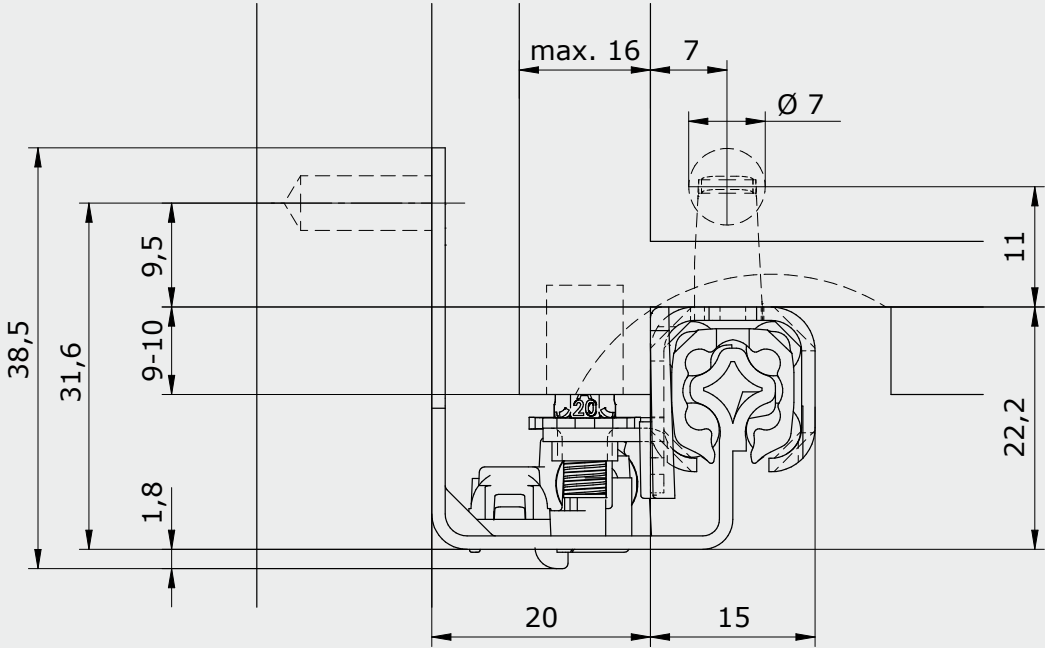


### Length and hole pattern of the cabinet runner

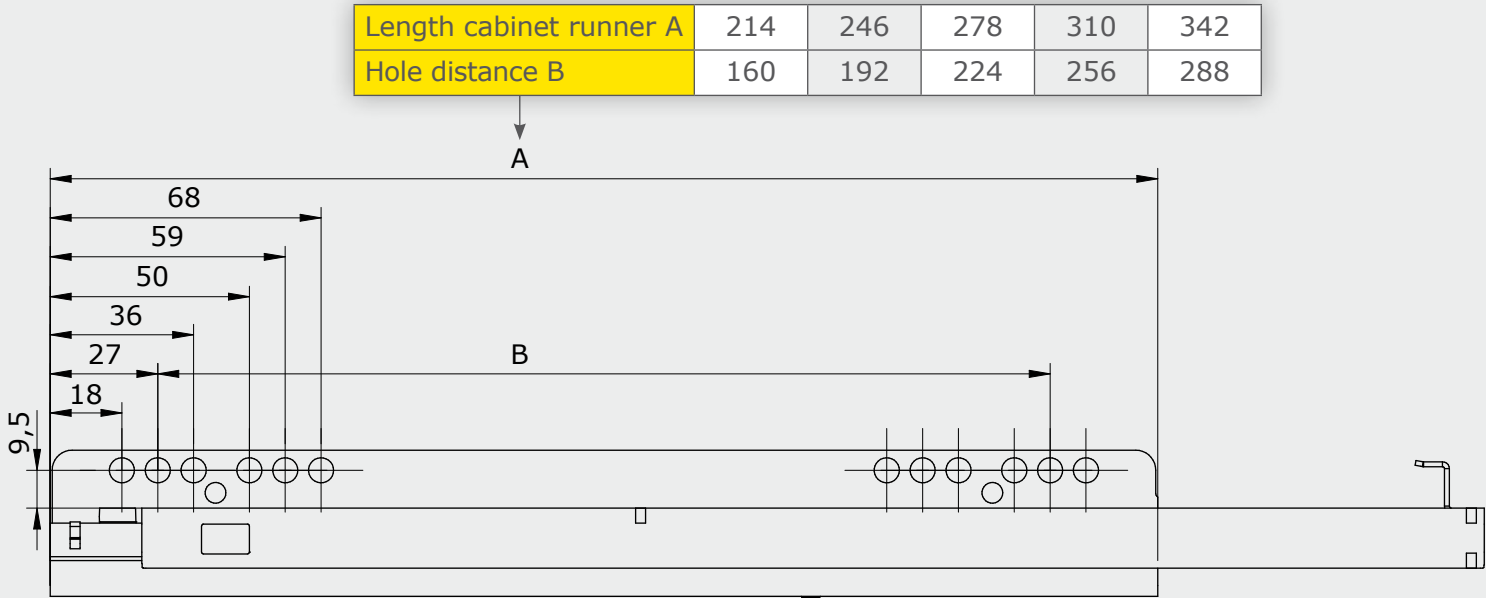


### Features

- Star-shaped profile
- Loading capacity up to 25 kg
- Lengths from 250 to 550 mm
- Quick plug-on assembly of the drawer
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- With soft-close
- With pre-assembled safety catch

### Drillings and cut-outs

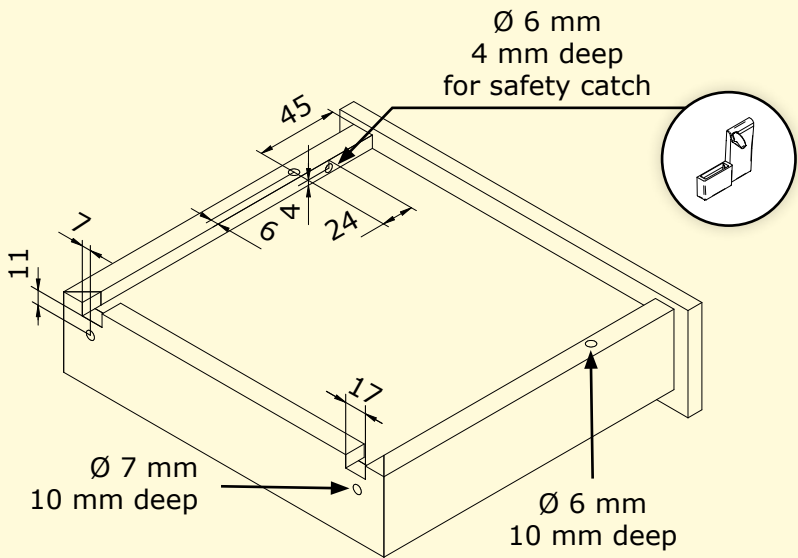


### Drillings in the cabinet

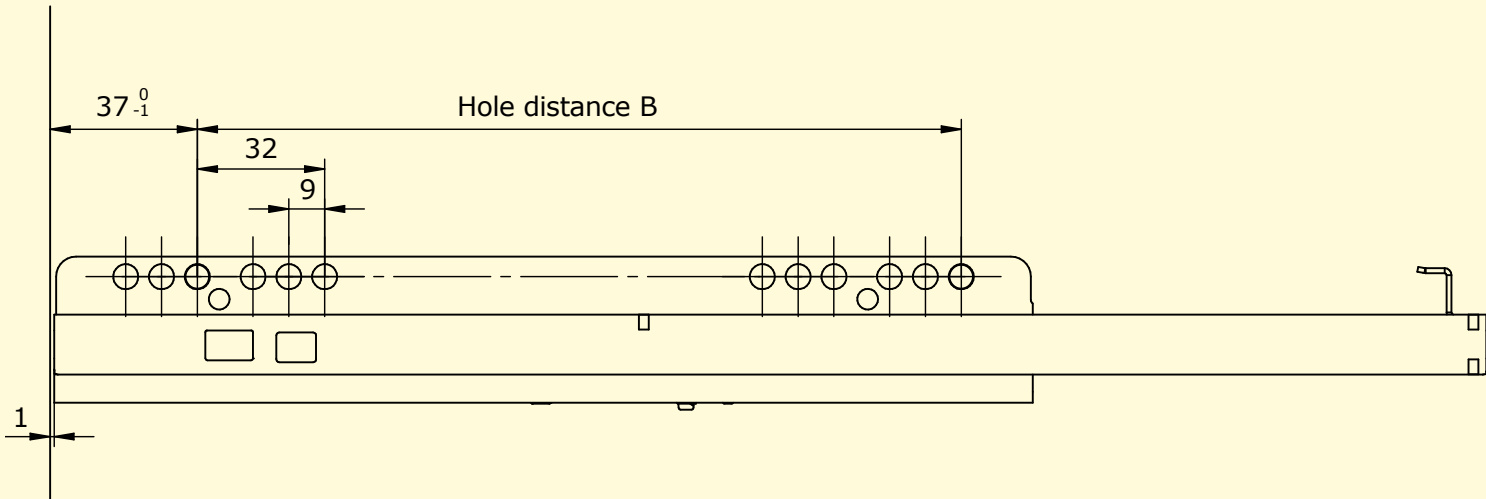


| Drawer length in mm | Cabinet runner in mm | Drawer runner in mm | Soft-close | Runners/Box | Boxes/Pallet maximum | Pieces/Pallet maximum | Weight/Pallet maximum | Order number left side | Order number right side |
|---------------------|----------------------|---------------------|------------|-------------|----------------------|-----------------------|-----------------------|------------------------|-------------------------|
| 250                 | 214                  | 237                 | x          | 40          | 45                   | 1800                  | 576                   | 3212502011200          | 3222502011200           |
| 300                 | 246                  | 287                 | x          | 40          | 35                   | 1400                  | 518                   | 3213002011200          | 3223002011200           |
| 350                 | 246                  | 337                 | x          | 40          | 35                   | 1400                  | 547                   | 3213502011200          | 3223502011200           |
| 400                 | 278                  | 387                 | x          | 32          | 42                   | 1344                  | 591                   | 3214002011200          | 3224002011200           |
| 450                 | 310                  | 437                 | x          | 32          | 42                   | 1344                  | 664                   | 3214502011200          | 3224502011200           |
| 500                 | 342                  | 487                 | x          | 32          | 30                   | 960                   | 521                   | 3215002011200          | 3225002011200           |
| 550                 | 342                  | 537                 | x          | 32          | 30                   | 960                   | 541                   | 3215502011200          | 3225502011200           |

Installation Dimensions

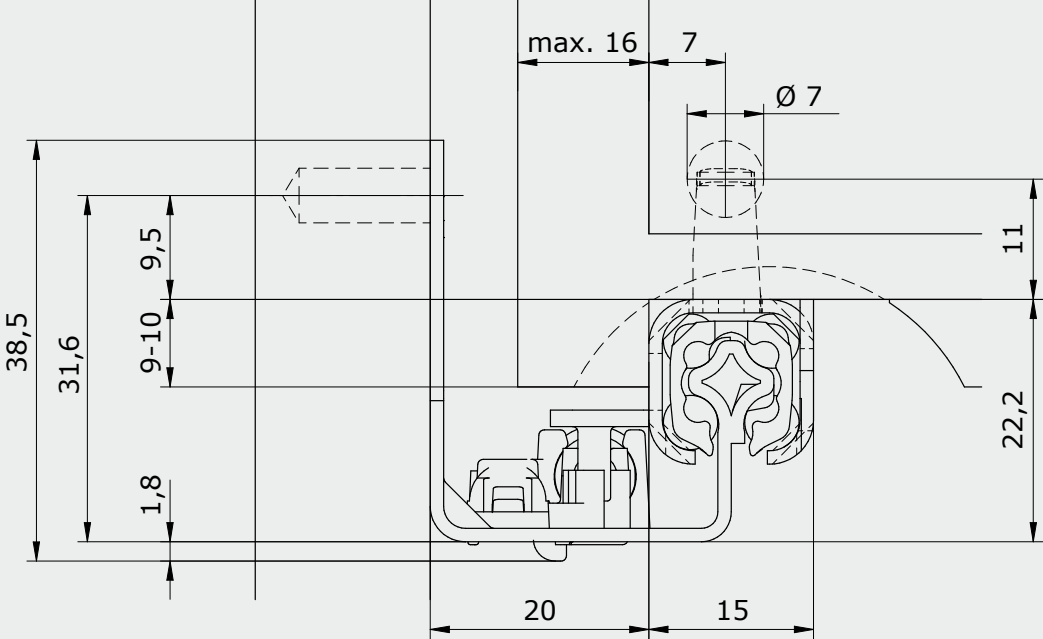

Length and hole pattern of the cabinet runner

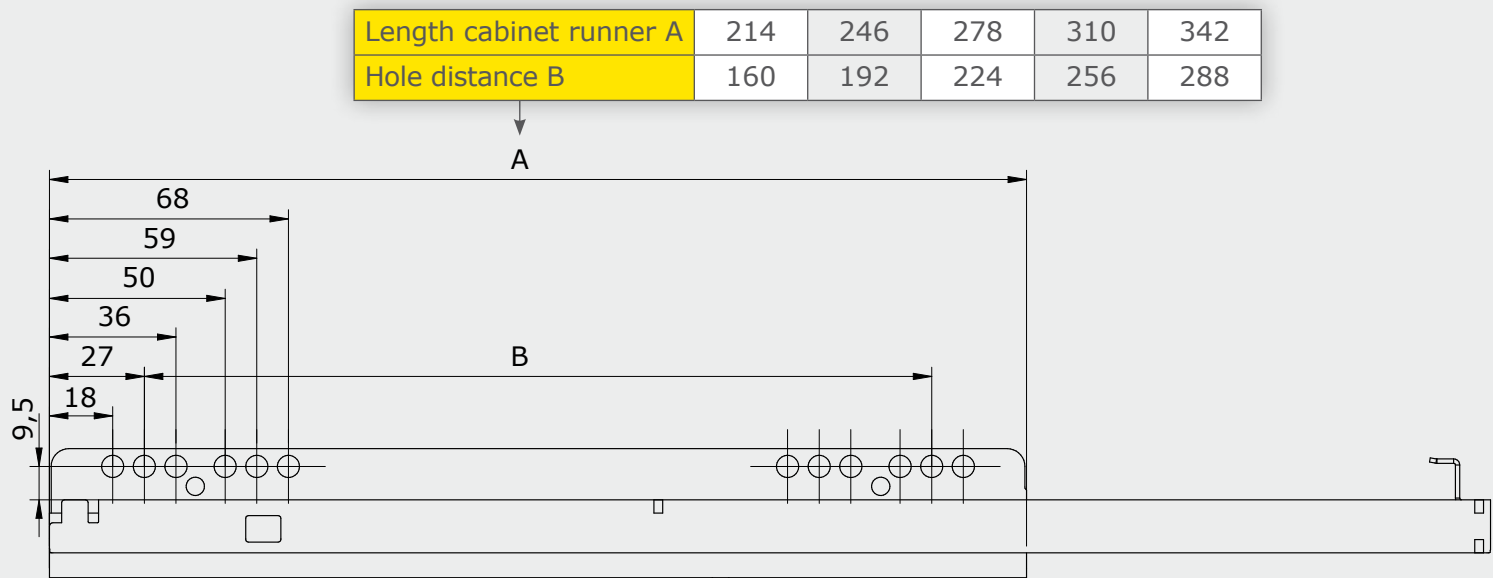


Features


- Star-shaped profile
- Loading capacity up to 25 kg
- Lengths from 250 to 550 mm
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- With soft-close
- Optionally with 1D or 2D coupling

Coupling technology

The types of couplings make the mounting and demounting of drawers quick and easy. All in one: safety catch, coupling and alignment. Available either as 1D (height adjustment), or 2D (height and side adjustment). A precise joint pattern can be achieved quickly, easily and without tools.

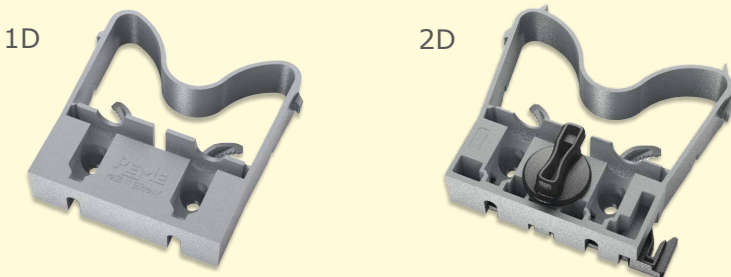


Drillings in the cabinet

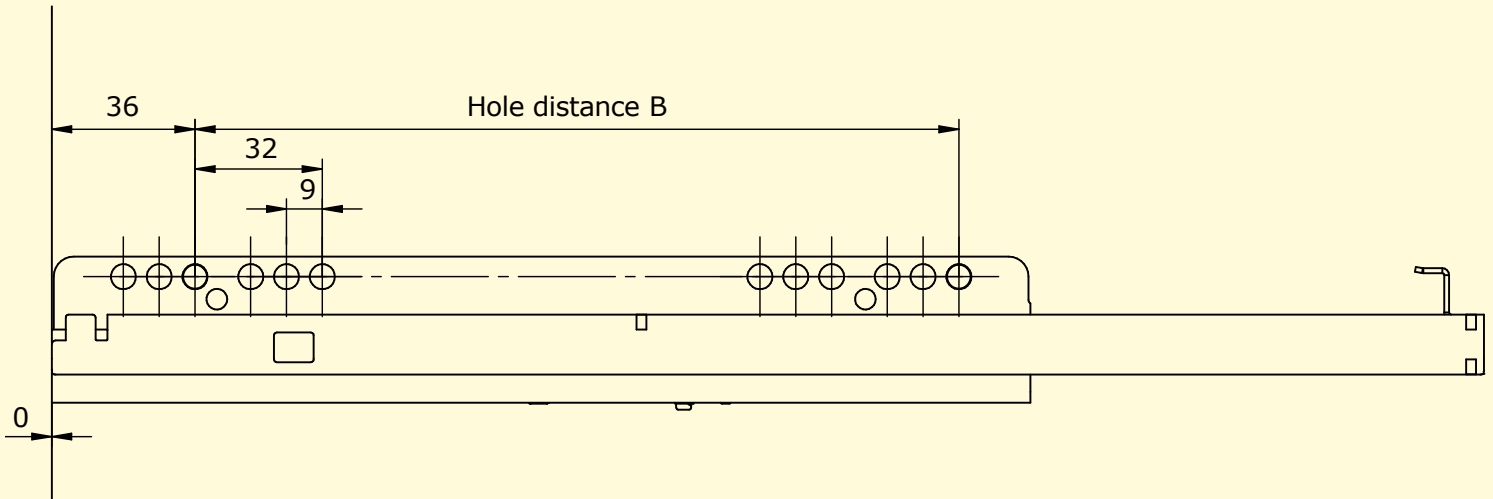


| Drawer length in mm | Cabinet runner in mm | Drawer runner in mm | Soft-close | Runners/Box | Boxes/Pallet maximum | Pieces/Pallet maximum | Weight/Pallet maximum | Order number left side | Order number right side |
|---------------------|----------------------|---------------------|------------|-------------|----------------------|-----------------------|-----------------------|------------------------|-------------------------|
| 250                 | 214                  | 260                 | x          | 40          | 45                   | 1800                  | 616                   | 3212502011100          | 3222502011000           |
| 300                 | 246                  | 310                 | x          | 40          | 35                   | 1400                  | 544                   | 3213002011100          | 3223002011000           |
| 350                 | 246                  | 360                 | x          | 40          | 35                   | 1400                  | 573                   | 3213502011100          | 3223502011000           |
| 400                 | 278                  | 410                 | x          | 32          | 42                   | 1344                  | 619                   | 3214002011100          | 3224002011000           |
| 450                 | 310                  | 460                 | x          | 32          | 42                   | 1344                  | 691                   | 3214502011100          | 3224502011000           |
| 500                 | 342                  | 510                 | x          | 32          | 30                   | 960                   | 548                   | 3215002011100          | 3225002011000           |
| 550                 | 342                  | 560                 | x          | 32          | 30                   | 960                   | 572                   | 3215502011100          | 3225502011000           |



Installation Dimensions

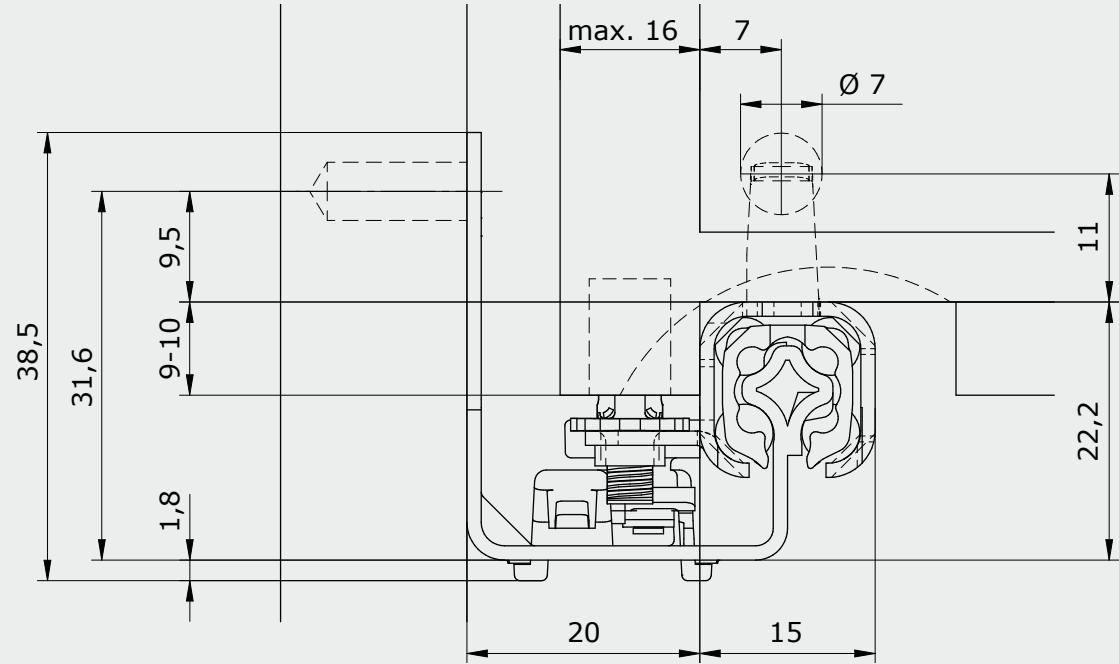


Length and hole pattern of the cabinet runner

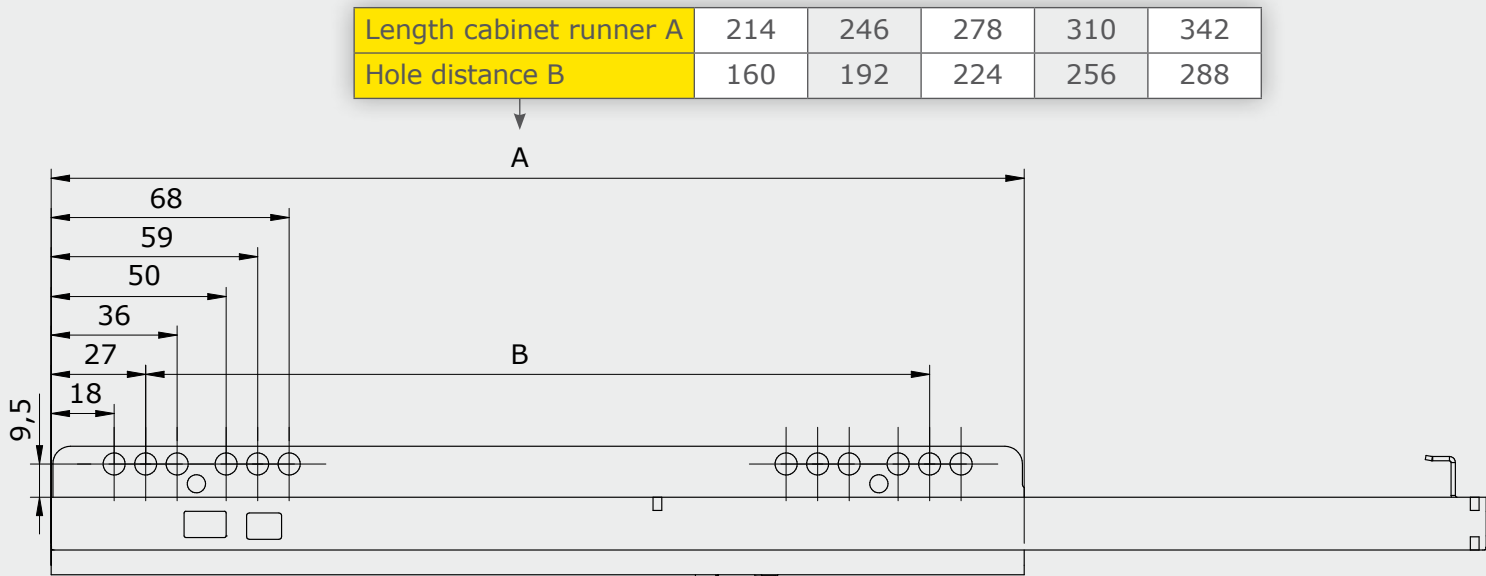


Features

- Star-shaped profile
- Loading capacity up to 25 kg
- Lengths from 250 to 550 mm
- Quick plug-on assembly of the drawer
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- Trigger path/reveal gap = 3 mm
- With push-to-open

Drillings and cut-outs

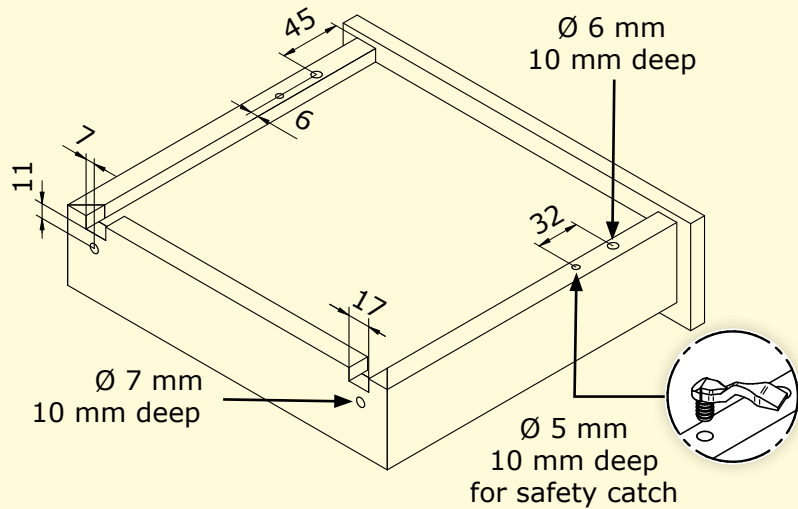

Drillings in the cabinet

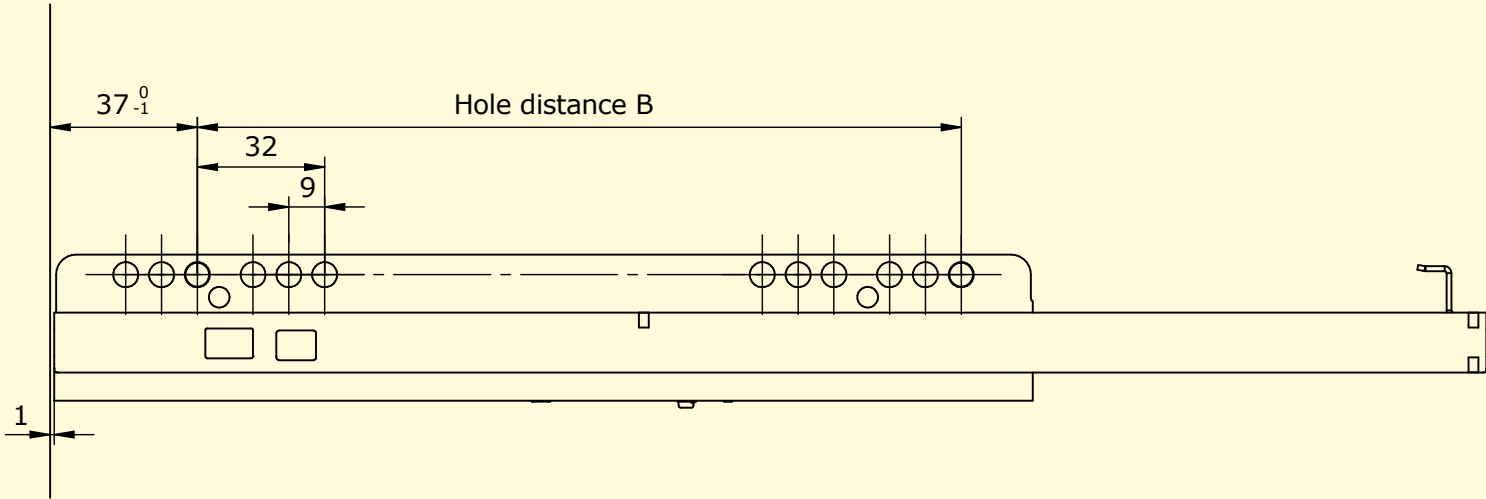


| Drawer length<br>in mm | Cabinet runner<br>in mm | Drawer runner<br>in mm | Push-to-Open | Runners/Box | Boxes/Pallet<br>maximum | Pieces/Pallet<br>maximum | Weight/Pallet<br>maximum | Order number<br>left side | Order number<br>right side |
|------------------------|-------------------------|------------------------|--------------|-------------|-------------------------|--------------------------|--------------------------|---------------------------|----------------------------|
| 250                    | 214                     | 260                    | x            | 40          | 45                      | 1800                     | 576                      | 3212503001500             | 3222503001500              |
| 300                    | 246                     | 310                    | x            | 40          | 35                      | 1400                     | 523                      | 3213003001500             | 3223003001500              |
| 350                    | 246                     | 360                    | x            | 40          | 35                      | 1400                     | 552                      | 3213503001500             | 3223503001500              |
| 400                    | 278                     | 410                    | x            | 32          | 42                      | 1344                     | 597                      | 3214003001500             | 3224003001500              |
| 450                    | 310                     | 460                    | x            | 32          | 42                      | 1344                     | 668                      | 3214503001500             | 3224503001500              |
| 500                    | 342                     | 510                    | x            | 32          | 30                      | 960                      | 534                      | 3215003001500             | 3225003001500              |
| 550                    | 342                     | 560                    | x            | 32          | 30                      | 960                      | 551                      | 3215503001500             | 3225503001500              |

# Single Extension PERFECT


## Push-to-Open and Coupling



### Installation Dimensions

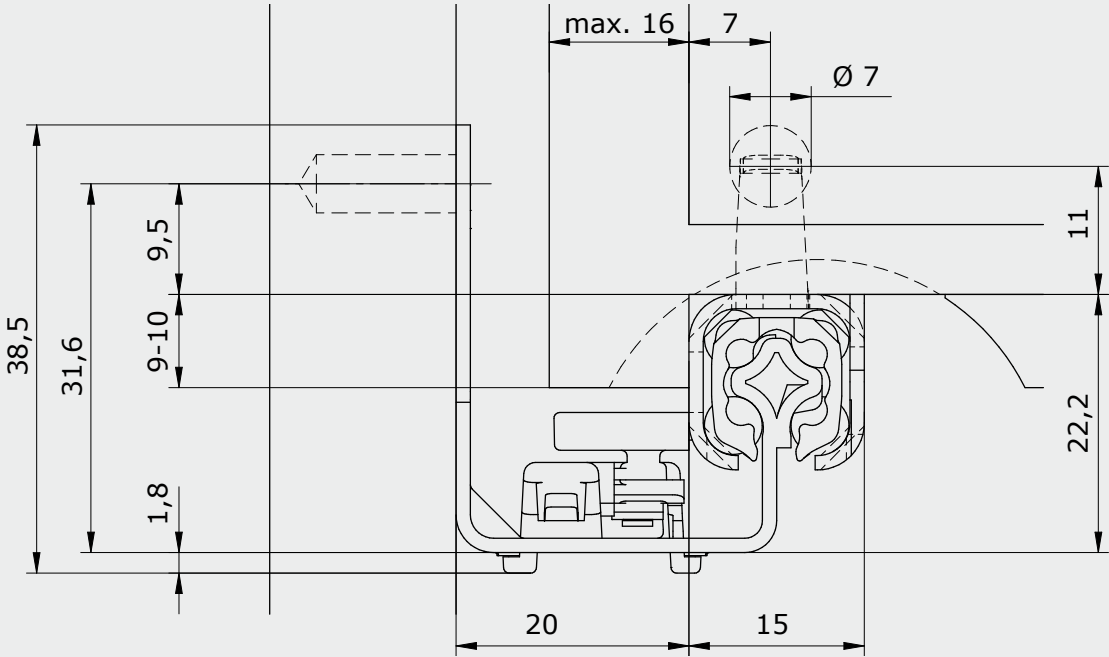

### Length and hole pattern of the cabinet runner

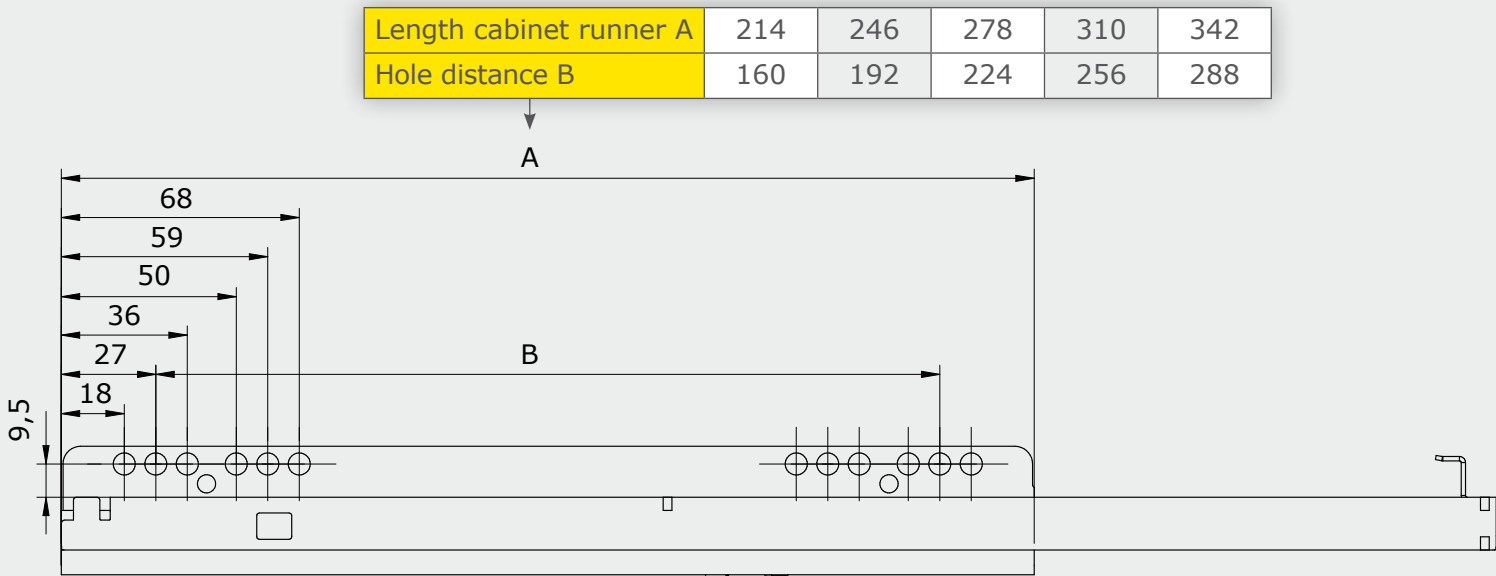


### Features


- Star-shaped profile
- Loading capacity up to 25 kg
- Lengths from 250 to 550 mm
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- Trigger travel/aperture gap = 3 mm
- With push-to-open
- Optionally with 1D or 2D coupling

### Coupling technology

The types of couplings make the mounting and demounting of drawers quick and easy. All in one: safety catch, coupling and alignment. Available either as 1D (height adjustment), or 2D (height and side adjustment). A precise joint pattern can be achieved quickly, easily and without tools.

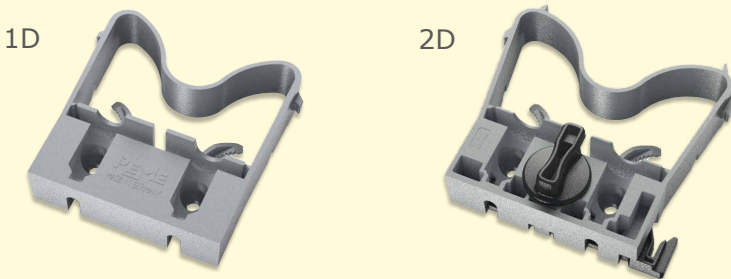

### Drillings in the cabinet

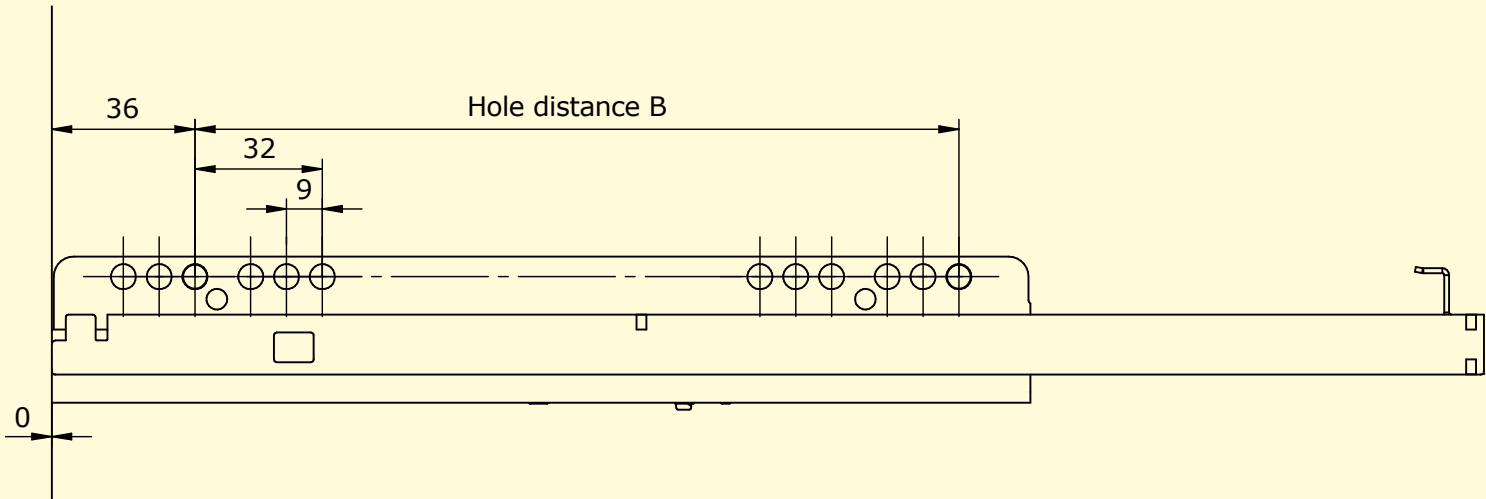


| Drawer length in mm | Cabinet runner in mm | Drawer runner in mm | Push-to-Open | Runners/Box | Boxes/Pallet maximum | Pieces/Pallet maximum | Weight/Pallet maximum | Order number left side | Order number right side |
|---------------------|----------------------|---------------------|--------------|-------------|----------------------|-----------------------|-----------------------|------------------------|-------------------------|
| 250                 | 214                  | 260                 | x            | 40          | 45                   | 1800                  | 567                   | 3212503001100          | 3222503001000           |
| 300                 | 246                  | 310                 | x            | 40          | 35                   | 1400                  | 514                   | 3213003001100          | 3223003001000           |
| 350                 | 246                  | 360                 | x            | 40          | 35                   | 1400                  | 543                   | 3213503001100          | 3223503001000           |
| 400                 | 278                  | 410                 | x            | 32          | 42                   | 1344                  | 589                   | 3214003001100          | 3224003001000           |
| 450                 | 310                  | 460                 | x            | 32          | 42                   | 1344                  | 661                   | 3214503001100          | 3224503001000           |
| 500                 | 342                  | 510                 | x            | 32          | 30                   | 960                   | 526                   | 3215003001100          | 3225003001000           |
| 550                 | 342                  | 560                 | x            | 32          | 30                   | 960                   | 545                   | 3215503001100          | 3225503001000           |

## Push-to-Open synchronization and plug-on assembly



|                         |     |     |     |     |     |
|-------------------------|-----|-----|-----|-----|-----|
| Length cabinet runner A | 214 | 246 | 278 | 310 | 342 |
| Hole distance B         | 160 | 192 | 224 | 256 | 288 |

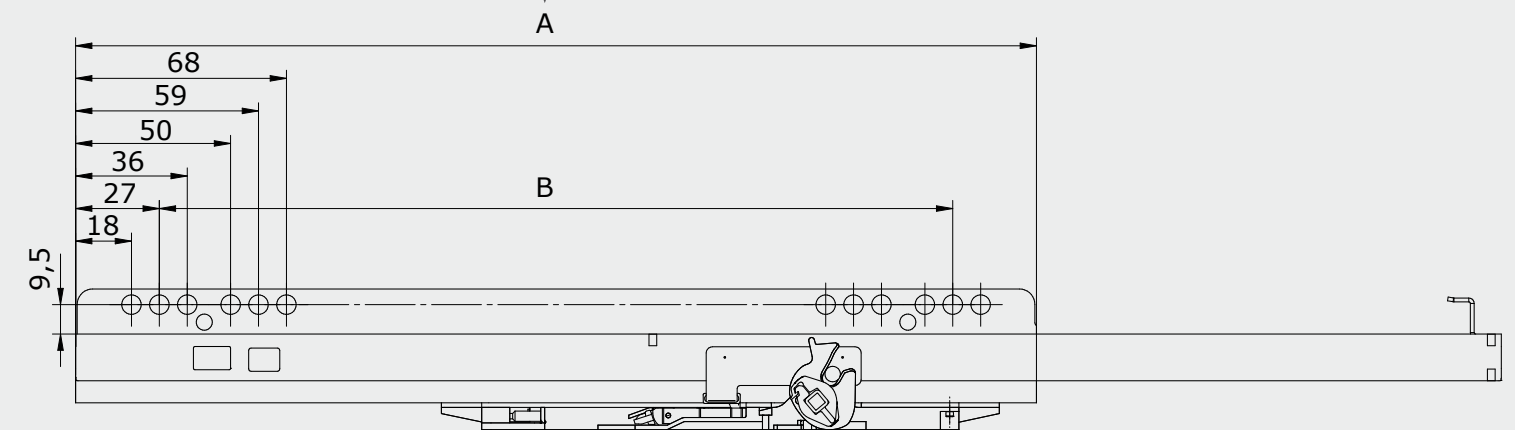

- Star-shaped profile
- Loading capacity up to 25 kg
- Lengths from 250 to 550 mm
- Quick plug-on assembly of the drawer
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- Trigger path/Reveal gap = 3 mm
- With push-to-open
- Greater sensitivity through synchronization

Technical drawing of a rectangular frame assembly. The drawing shows a perspective view of a rectangular frame with dimensions and callouts for specific components.

- Dimensions:**
  - Top edge: 45
  - Right edge: 32
  - Bottom edge: 17
  - Left edge: 11
  - Inner width: 6
  - Inner height: 7
- Callouts:**
  - $\varnothing 6 \text{ mm}$  10 mm deep (pointing to a hole on the right edge)
  - $\varnothing 7 \text{ mm}$  10 mm deep (pointing to a hole on the bottom edge)
  - $\varnothing 5 \text{ mm}$  10 mm deep for safety catch (pointing to a hole on the right edge, with an inset showing a detail of the catch mechanism)

Technical drawing of a mechanical assembly, likely a pump or motor component, showing dimensions and a cross-section.


Dimensions:

- 37<sup>0</sup><sub>-1</sub> (Overall length dimension)
- 32 (Distance between two holes)
- 9 (Distance between two holes)
- Hole distance B (Distance between two groups of holes)
- 1 (Small dimension at the bottom left)


The drawing includes a cross-section of a component with a central shaft and a pump/motor assembly mounted on it. The component has a long, thin body with a flange at the right end. The pump/motor assembly is mounted on a base with a central shaft and a pump head.

| Drawer length<br>in mm | Cabinet runner<br>in mm | Drawer runner<br>in mm | Push-to-Open<br>synchronization | Runners/Box | Boxes/Pallet<br>maximum | Pieces/Pallet<br>maximum | Weight/Pallet<br>maximum | Order number<br>left side | Order number<br>right side |
|------------------------|-------------------------|------------------------|---------------------------------|-------------|-------------------------|--------------------------|--------------------------|---------------------------|----------------------------|
| 250                    | 214                     | 260                    | x                               | 16          | 45                      | 720                      | 270                      | 3212503011500             | 3222503011500              |
| 300                    | 246                     | 310                    | x                               | 16          | 35                      | 560                      | 244                      | 3213013011500             | 3223013011500              |
| 350                    | 246                     | 360                    | x                               | 16          | 35                      | 560                      | 255                      | 3213503011500             | 3223503011500              |
| 400                    | 278                     | 410                    | x                               | 16          | 42                      | 672                      | 335                      | 3214003011500             | 3224003011500              |
| 450                    | 310                     | 460                    | x                               | 16          | 42                      | 672                      | 370                      | 3214503011500             | 3224503011500              |
| 500                    | 342                     | 510                    | x                               | 16          | 30                      | 480                      | 295                      | 3215003011500             | 3225003011500              |
| 550                    | 342                     | 560                    | x                               | 16          | 30                      | 480                      | 306                      | 3215503011500             | 3225503011500              |

Calculation synchronization linkage

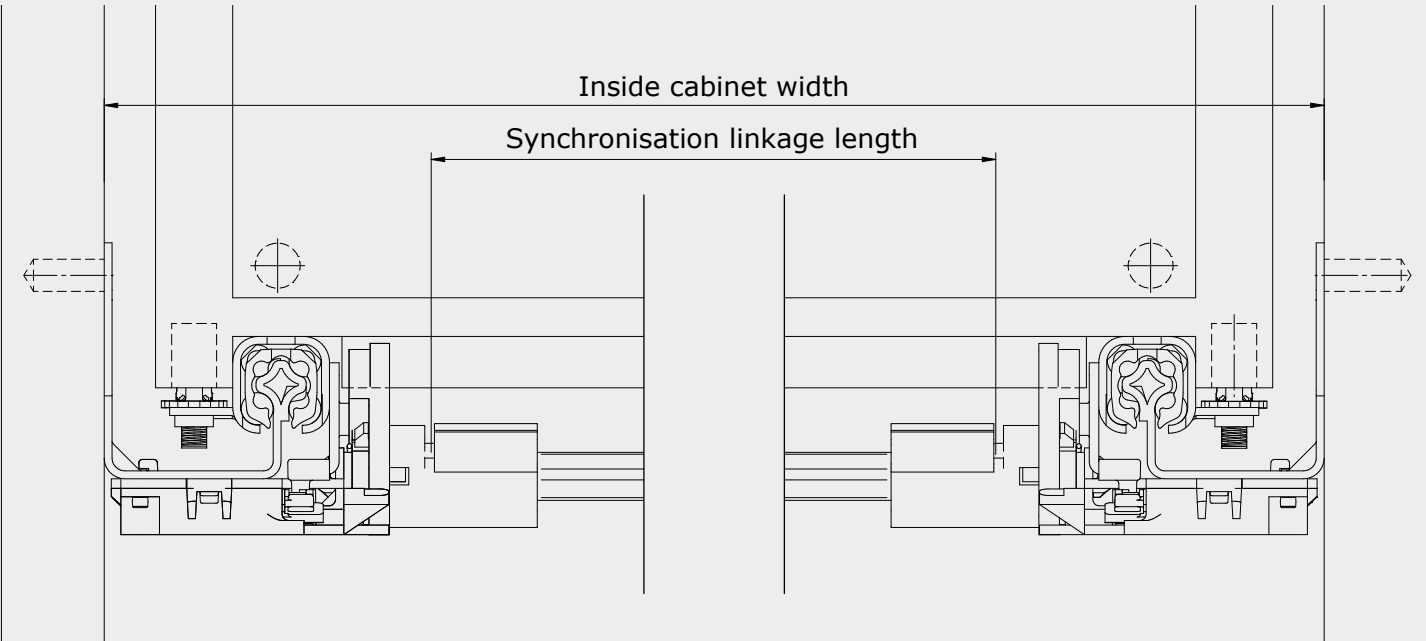

**Example calculation**  
Synchronisation linkage length = Inside cabinet width - 102 mm

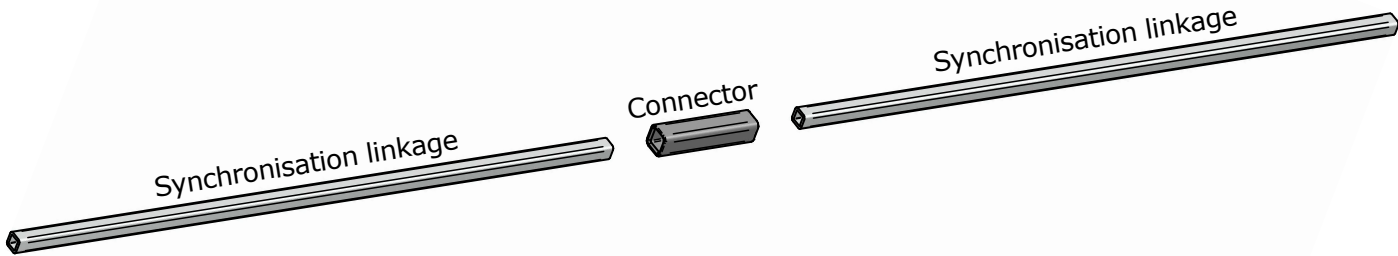

| Article overview |                         |                                        |
|------------------|-------------------------|----------------------------------------|
| Product:         | Synchronization linkage | Connector                              |
| Dimensions:      | 6x6 mm, 1100 mm long    | 9x9 mm, 40 mm long                     |
| Material:        | Aluminium               | Plastic                                |
| Info:            | For self-cutting        | For extending the synchronizer linkage |
| Order number:    | 2060000000026           | 2060000000027                          |



# Single Extension PERFECT


Offset hanging tab \_\_\_\_\_ Page 32

## Product

Of course, we also manufacture custom drawer slides tailored to the specific needs of our clients. Based on the PERFECT slide, we offer drawer slides with offset mounting brackets to create the impression of a full-extension slide. Together with our experienced technical team, we provide professional support until we develop the perfect solution for your application. On request, we produce custom solutions starting from 1,000 pairs.

## Request and order


Do you have any questions about our products or would like to have an non-binding offer? Then simply contact us now. We'll be glad to help you!



## Offset hanging tab



|                         |     |     |     |     |     |
|-------------------------|-----|-----|-----|-----|-----|
| Length cabinet runner A | 214 | 246 | 278 | 310 | 342 |
| Hole distance B         | 160 | 192 | 224 | 256 | 288 |

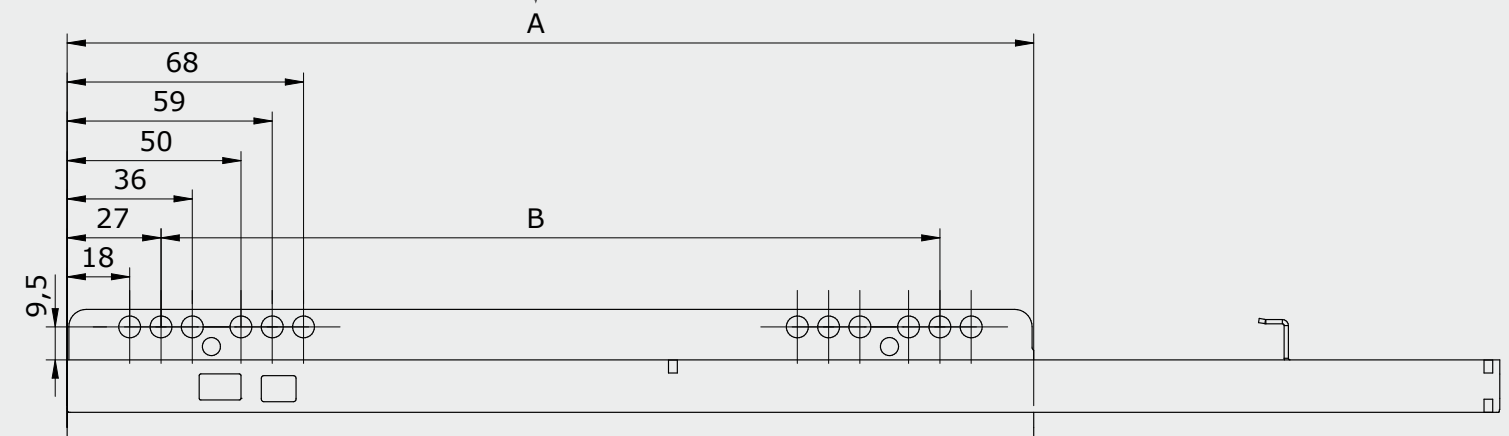

- Star-shaped profile
- Loading capacity up to 25 kg
- Drawer lengths (Dimension C) from 250 to 500 mm
- Quick plug-on assembly of the drawer
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- Optionally with self-close, soft-close or Push-to-Open
- Optionally with 1D or 2D coupling
- Optionally with EB20 or EB23
- Optionally as stub version (without coupling)

Technical drawing of a rectangular frame structure. The drawing shows a perspective view of a rectangular frame with dimensions and hole specifications. The dimensions are: 47 mm (width), 6 mm (thickness), 11 mm (height), 7 mm (width), 32 mm (width), and 17 mm (width). The hole specifications are: Ø 6 mm 10 mm deep, Ø 7 mm 10 mm deep, and Ø 5 mm 10 mm deep for safety catch. A circular inset shows a detail of a hole with a screw and a safety catch.

Technical drawing of a mechanical part showing dimensions and hole locations. The drawing includes a top view and a side view. The top view shows a rectangular part with a total length of  $L$  and a width of  $C$ . The distance between the first and last hole is labeled  $B$ . The distance from the left edge to the first hole is  $39^{+0}_{-1}$ . The distance between the first and second hole is  $32$ , and the distance between the second and third hole is  $9$ . The side view shows a thickness of  $3$ . The drawing also includes a dashed line indicating the center of the part and a small circle indicating a hole location.



|                                           |     |     |     |     |     |     |
|-------------------------------------------|-----|-----|-----|-----|-----|-----|
| Drawer length in mm (Dimension C)         | 250 | 300 | 350 | 400 | 450 | 500 |
| Minimum cabinet depth in mm (Dimension L) | 315 | 365 | 415 | 465 | 515 | 565 |



## Single Extension PERFECT PEANUT®

Soft-close \_\_\_\_\_ Page 38

Push-to-Open \_\_\_\_\_ Page 42


### Product

The star-shaped geometry of the PERFECT PEANUT® single extension skilfully absorbs incorrect loads. The overlapping of the star-shaped area ensures high rigidity, which also has a positive effect on the running properties. The PEANUT® connection technology also allows the drawer runner to be **mounted without tools**. PERFECT PEANUT® fulfils all functional requirements for wooden drawers in living and sleeping areas. PERFECT PEANUT® is optionally available with soft-close and with push-to-open.


### PEANUT® connection technology

The PEANUT® is an invisible connector which allows the PERFECT slide to be mounted quickly and easily without tools. The PEANUT® is made of reinforced glass fibre nylon, which ensures a high clamping force when inserted into the cabinet wall. The PEANUT® head is specifically designed to maximise ease of assembly and joint strength. The PERFECT concealed slides can thus be installed quickly, easily and without tools.

Installation Dimensions

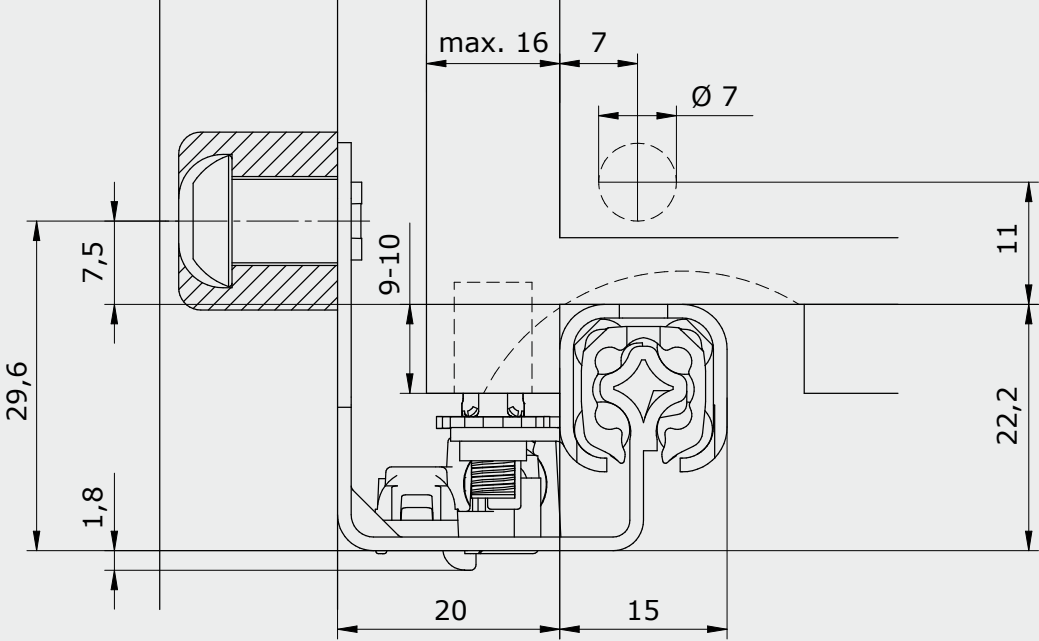


Length and hole pattern of the cabinet runner

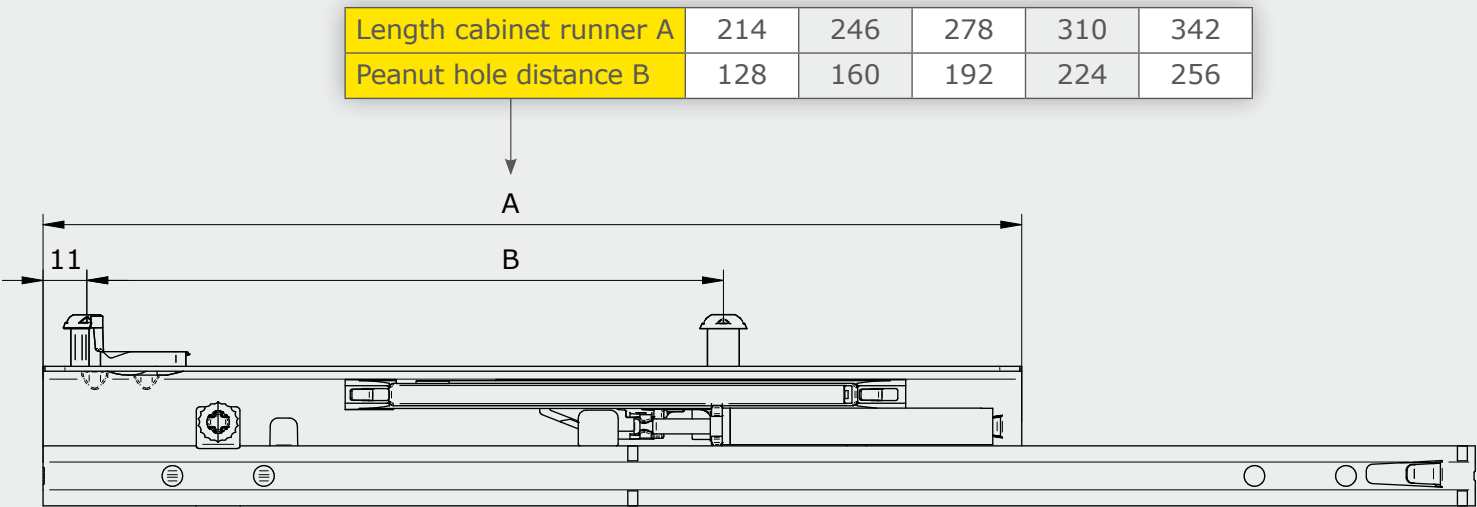


Features

- Star-shaped profile
- Loading capacity up to 25 kg
- Lengths from 250 to 550 mm
- Quick plug-on assembly of the drawer
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- With PEANUT® connecting fittings
- Quick and easy assembly
- With soft-close

Drillings and cut-outs

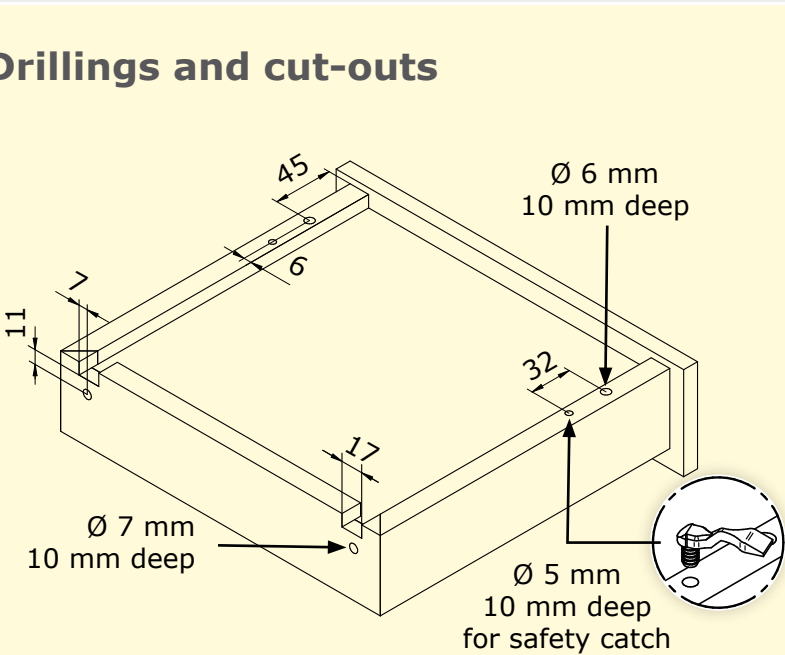


Milling in the cabinet

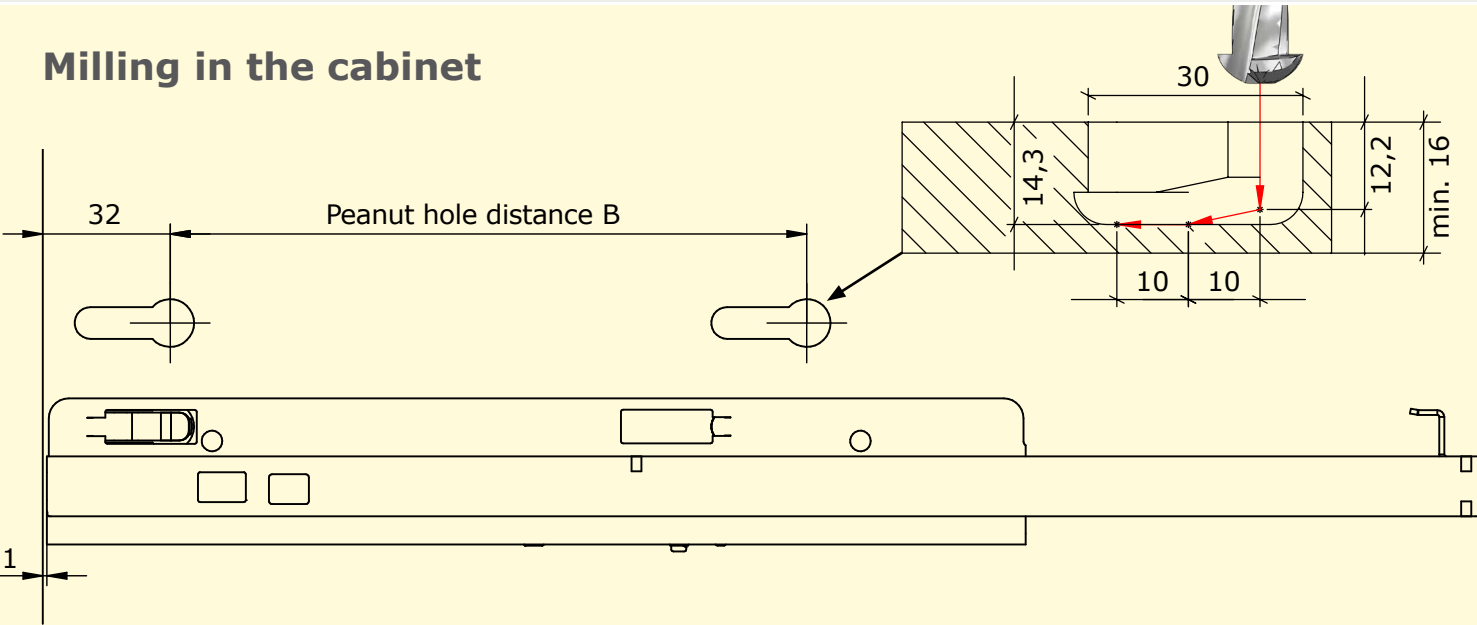

| Drawer length<br>in mm | Cabinet runner<br>in mm | Drawer runner<br>in mm | Soft-close | Runners/Box | Boxes/Pallet<br>maximum | Pieces/Pallet<br>maximum | Weight/Pallet<br>maximum | Order number<br>left side | Order number<br>right side |
|------------------------|-------------------------|------------------------|------------|-------------|-------------------------|--------------------------|--------------------------|---------------------------|----------------------------|
| 250                    | 214                     | 260                    | x          | 30          | 45                      | 1350                     | 468                      | 3212502019000             | 3222502019000              |
| 300                    | 246                     | 310                    | x          | 30          | 35                      | 1050                     | 421                      | 3213002019000             | 3223002019000              |
| 350                    | 246                     | 360                    | x          | 30          | 35                      | 1050                     | 443                      | 3213502019000             | 3223502019000              |
| 400                    | 278                     | 410                    | x          | 24          | 42                      | 1008                     | 489                      | 3214002019000             | 3224002019000              |
| 450                    | 310                     | 460                    | x          | 24          | 42                      | 1008                     | 542                      | 3214502019000             | 3224502019000              |
| 500                    | 342                     | 510                    | x          | 24          | 30                      | 720                      | 420                      | 3215002019000             | 3225002019000              |
| 550                    | 342                     | 560                    | x          | 24          | 30                      | 720                      | 435                      | 3215502019000             | 3225502019000              |




Installation Dimensions

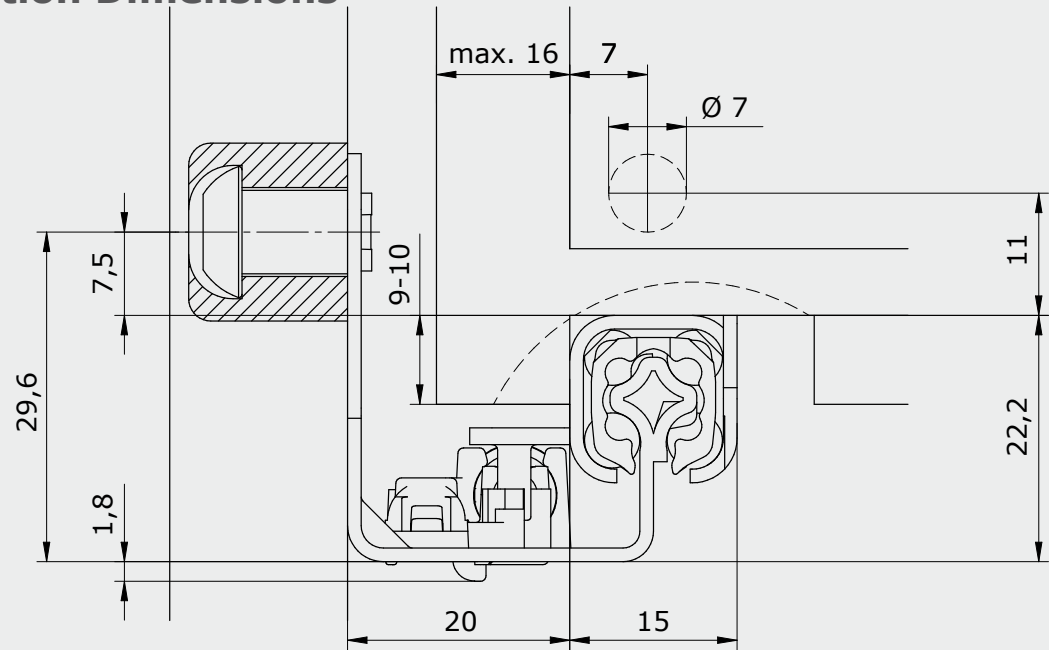

Length and hole pattern of the cabinet runner

|                         |     |     |     |     |     |
|-------------------------|-----|-----|-----|-----|-----|
| Length cabinet runner A | 214 | 246 | 278 | 310 | 342 |
| Peanut hole distance B  | 128 | 160 | 192 | 224 | 256 |

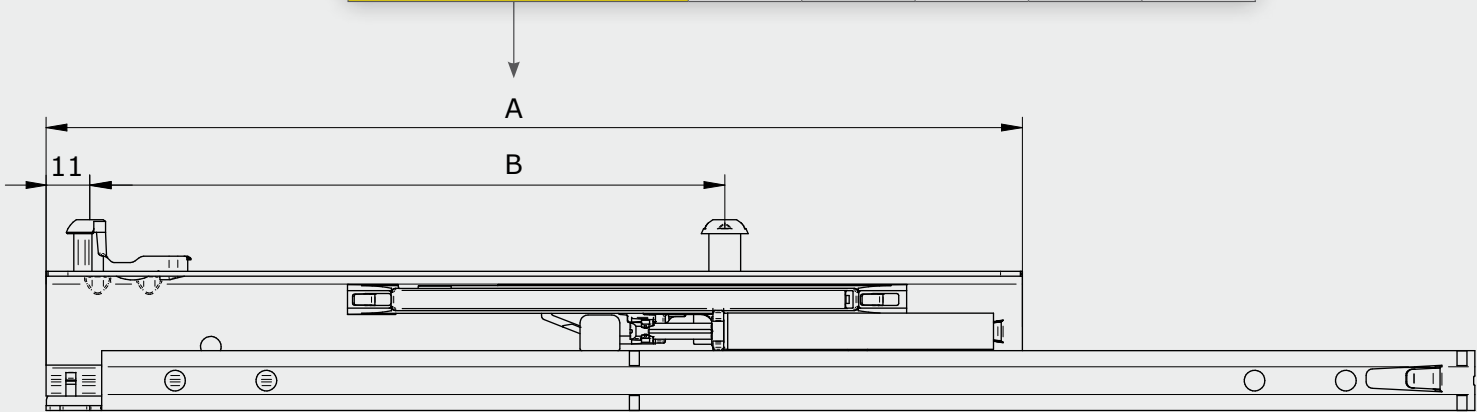


Features


- Star-shaped profile
- Loading capacity up to 25 kg
- Lengths from 250 to 550 mm
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- With PEANUT® connecting fittings
- Quick and easy assembly of the drawer
- With soft-close
- Optionally with 1D or 2D coupling

Coupling technology

The types of couplings make the mounting and demounting of drawers quick and easy. All in one: safety catch, coupling and alignment. Available either as 1D (height adjustment), or 2D (height and side adjustment). A precise joint pattern can be achieved quickly, easily and without tools.

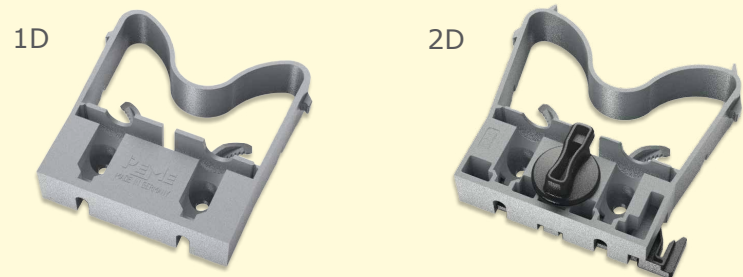


Milling in the cabinet

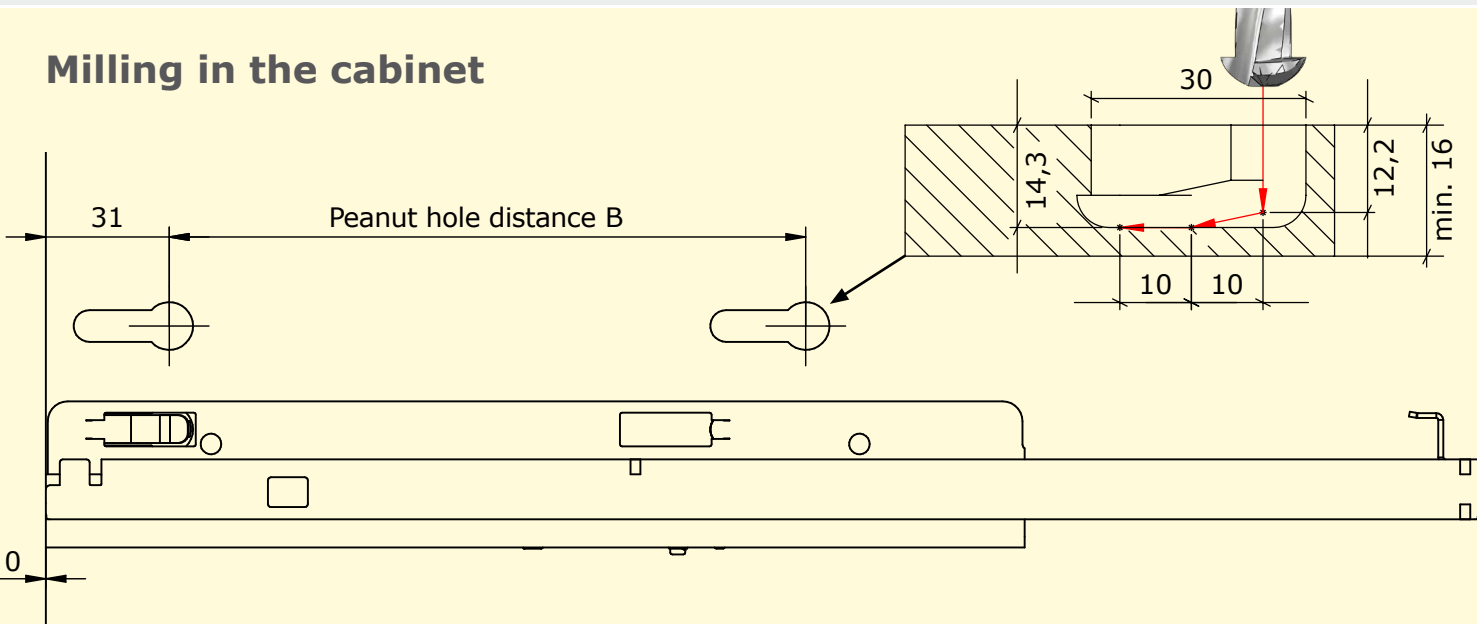


| Drawer length<br>in mm | Cabinet runner<br>in mm | Drawer runner<br>in mm | Soft-close | Runners/Box | Boxes/Pallet<br>maximum | Pieces/Pallet<br>maximum | Weight/Pallet<br>maximum | Order number<br>left side | Order number<br>right side |
|------------------------|-------------------------|------------------------|------------|-------------|-------------------------|--------------------------|--------------------------|---------------------------|----------------------------|
| 250                    | 214                     | 260                    | x          | 30          | 45                      | 1350                     | 468                      | 3212502019200             | 3222502019100              |
| 300                    | 246                     | 310                    | x          | 30          | 35                      | 1050                     | 421                      | 3213002019200             | 3223002019100              |
| 350                    | 246                     | 360                    | x          | 30          | 35                      | 1050                     | 443                      | 3213502019200             | 3223502019100              |
| 400                    | 278                     | 410                    | x          | 24          | 42                      | 1008                     | 489                      | 3214002019200             | 3224002019100              |
| 450                    | 310                     | 460                    | x          | 24          | 42                      | 1008                     | 542                      | 3214502019200             | 3224502019100              |
| 500                    | 342                     | 510                    | x          | 24          | 30                      | 720                      | 420                      | 3215002019200             | 3225002019100              |
| 550                    | 342                     | 560                    | x          | 24          | 30                      | 720                      | 435                      | 3215502019200             | 3225502019100              |

### Installation Dimensions

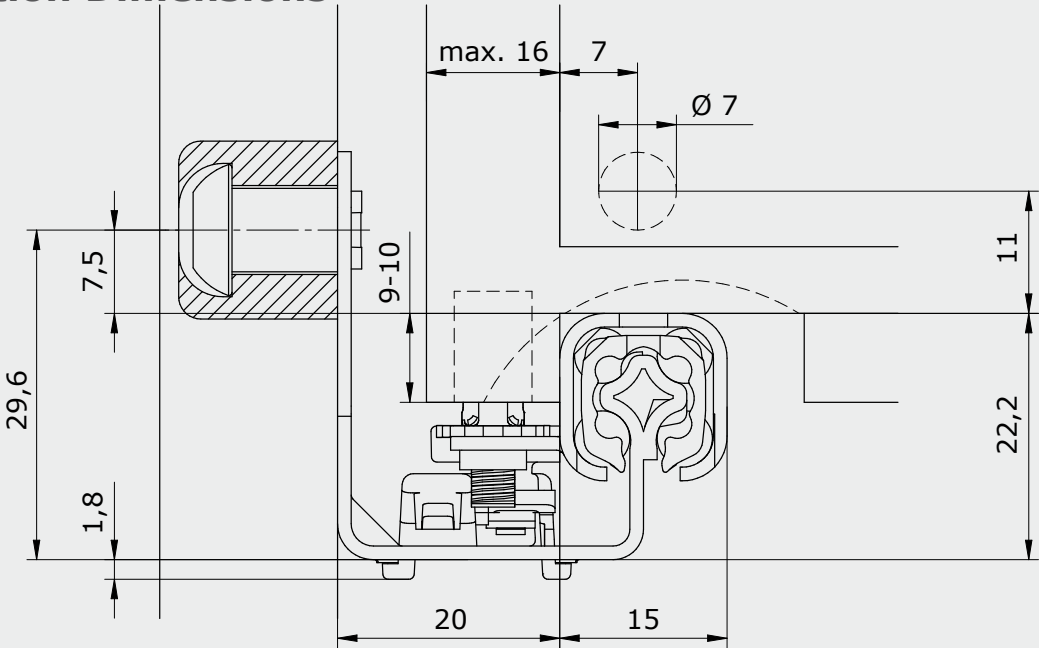


### Length and hole pattern of the cabinet runner

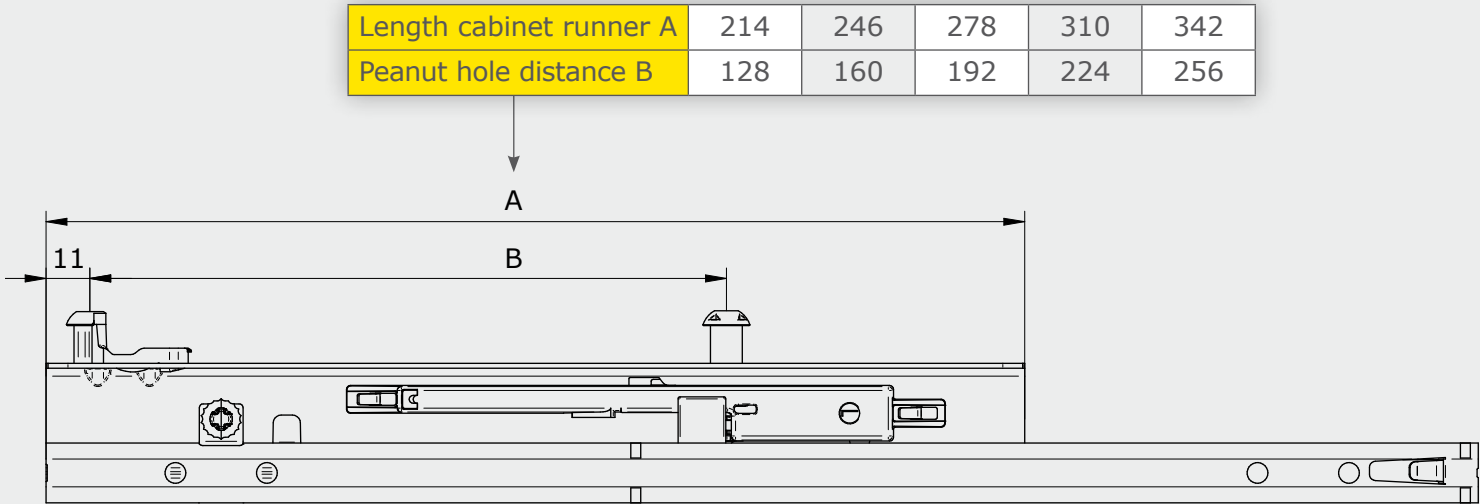


### Features

- Star-shaped profile
- Loading capacity up to 25 kg
- Lengths from 250 to 550 mm
- Quick plug-on assembly of the drawer
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- With PEANUT® connecting fittings
- Quick and easy assembly
- Trigger path/reveal gap = 3 mm
- With push-to-open

### Drillings and cut-outs

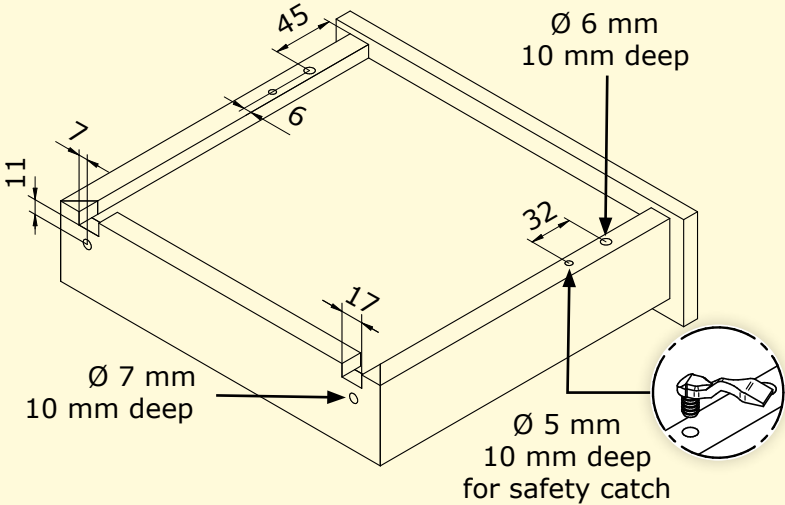

### Milling in the cabinet

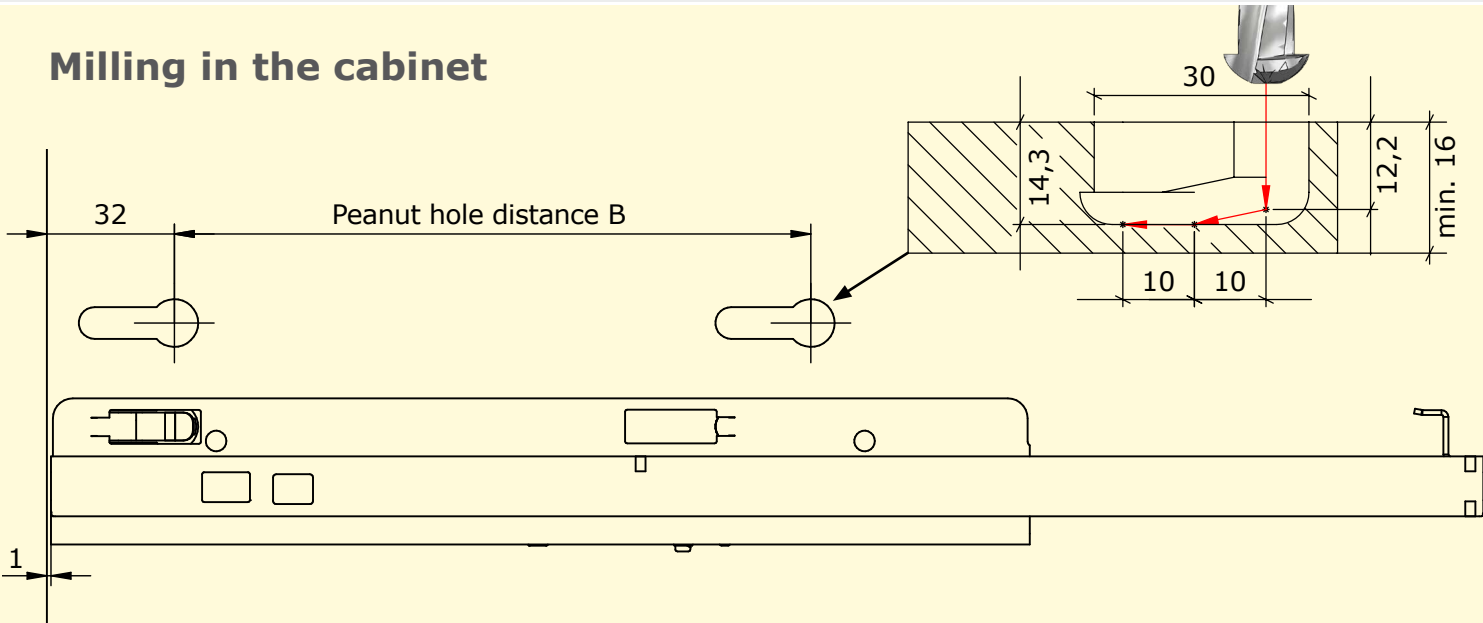

| Drawer length<br>in mm | Cabinet runner<br>in mm | Drawer runner<br>in mm | Push-to-Open | Runners/Box | Boxes/Pallet<br>maximum | Pieces/Pallet<br>maximum | Weight/Pallet<br>maximum | Order number<br>left side | Order number<br>right side |
|------------------------|-------------------------|------------------------|--------------|-------------|-------------------------|--------------------------|--------------------------|---------------------------|----------------------------|
| 250                    | 214                     | 260                    | x            | 30          | 45                      | 1350                     | 468                      | 3212503009000             | 3222503009000              |
| 300                    | 246                     | 310                    | x            | 30          | 35                      | 1050                     | 421                      | 3213003009000             | 3223003009000              |
| 350                    | 246                     | 360                    | x            | 30          | 35                      | 1050                     | 443                      | 3213503009000             | 3223503009000              |
| 400                    | 278                     | 410                    | x            | 24          | 42                      | 1008                     | 489                      | 3214003009000             | 3224003009000              |
| 450                    | 310                     | 460                    | x            | 24          | 42                      | 1008                     | 542                      | 3214503009000             | 3224503009000              |
| 500                    | 342                     | 510                    | x            | 24          | 30                      | 720                      | 420                      | 3215003009000             | 3225003009000              |
| 550                    | 342                     | 560                    | x            | 24          | 30                      | 720                      | 435                      | 3215503009000             | 3225503009000              |



## Single Extension PERFECT EB23

|              |         |
|--------------|---------|
| Soft-close   | Page 46 |
| Push-to-Open | Page 52 |
| Peanut®      | Page 56 |

### Product

The star-shaped geometry of the PERFECT single extension skilfully absorbs incorrect loads. The overlapping of the star-shaped area ensures a high rigidity, which also has a positive effect on the running properties. PERFECT therefore fulfils all functional requirements for wooden drawers in living and sleeping areas. The PERFECT single extension is available either as a fully-fledged standard version or as a shortened stub version.

### Variants


The PERFECT single extension runner is available with soft-close or with push-to-open. The following options are available for attaching and detaching drawers: Plug-on assembly, 1D coupling and 2D coupling. The PERFECT single extension runner offers a safety-catch for drawer locking.

# Single Extension PERFECT EB23


Soft-close and plug-on assembly



## Installation Dimensions

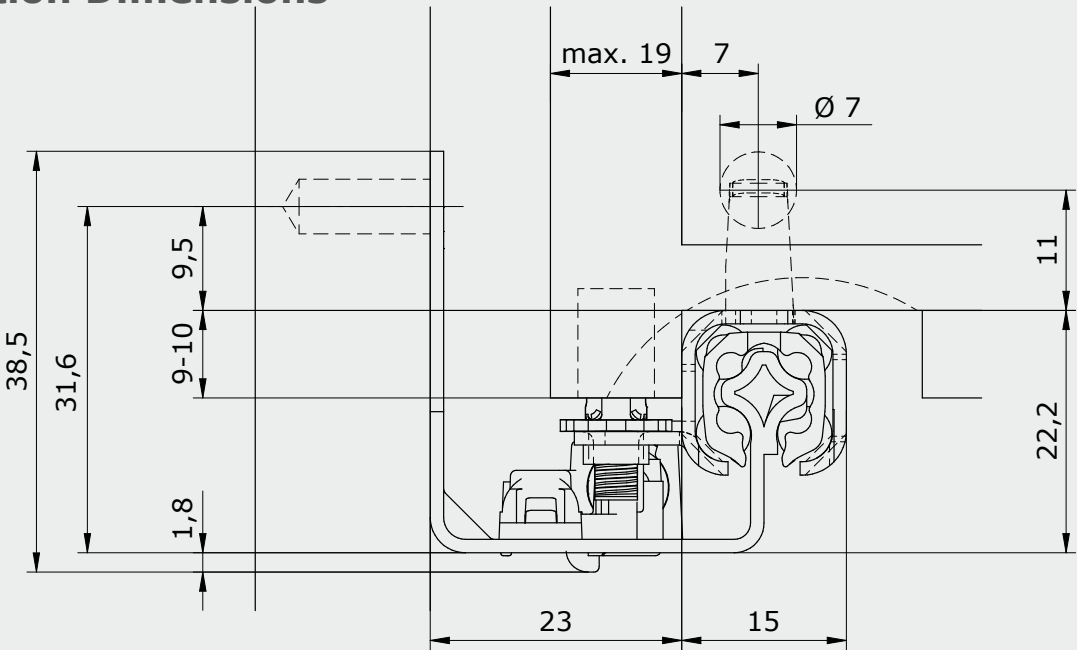


## Length and hole pattern of the cabinet runner

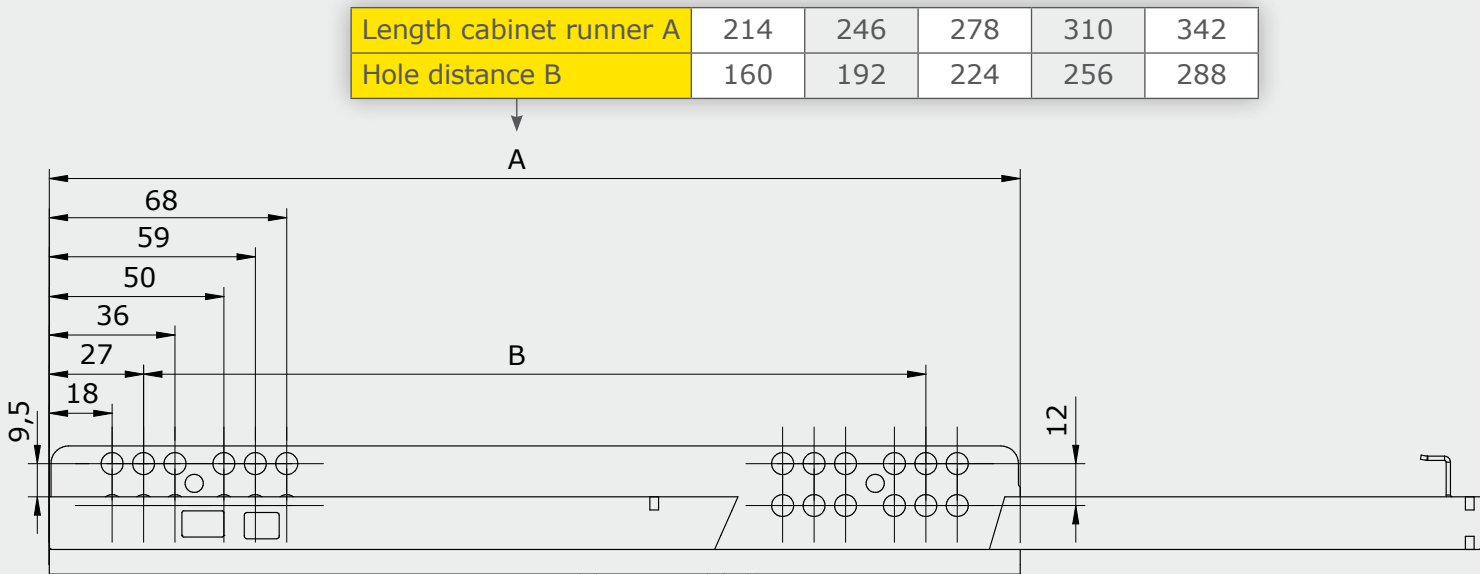


## Features

- Star-shaped profile
- Loading capacity up to 25 kg
- Lengths from 250 to 550 mm
- Quick plug-on assembly of the drawer
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- Installation width 23 mm (≤ 19 mm)
- With soft-close

## Drillings and cut-outs

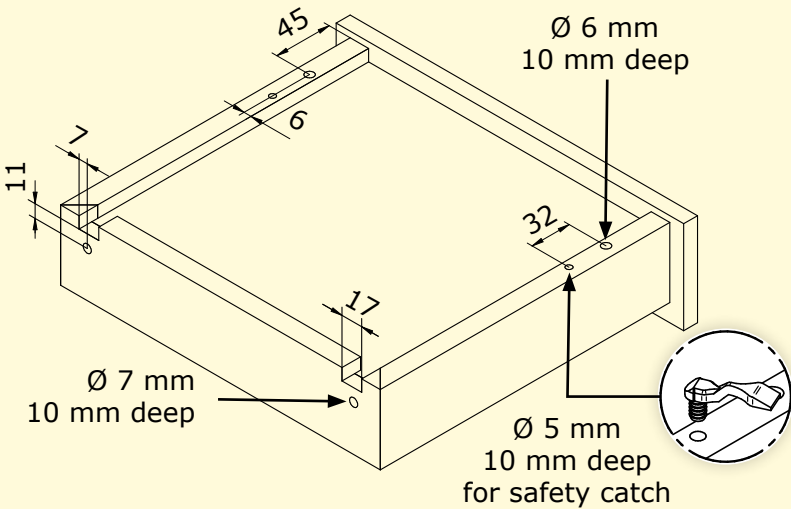

## Drillings in the cabinet

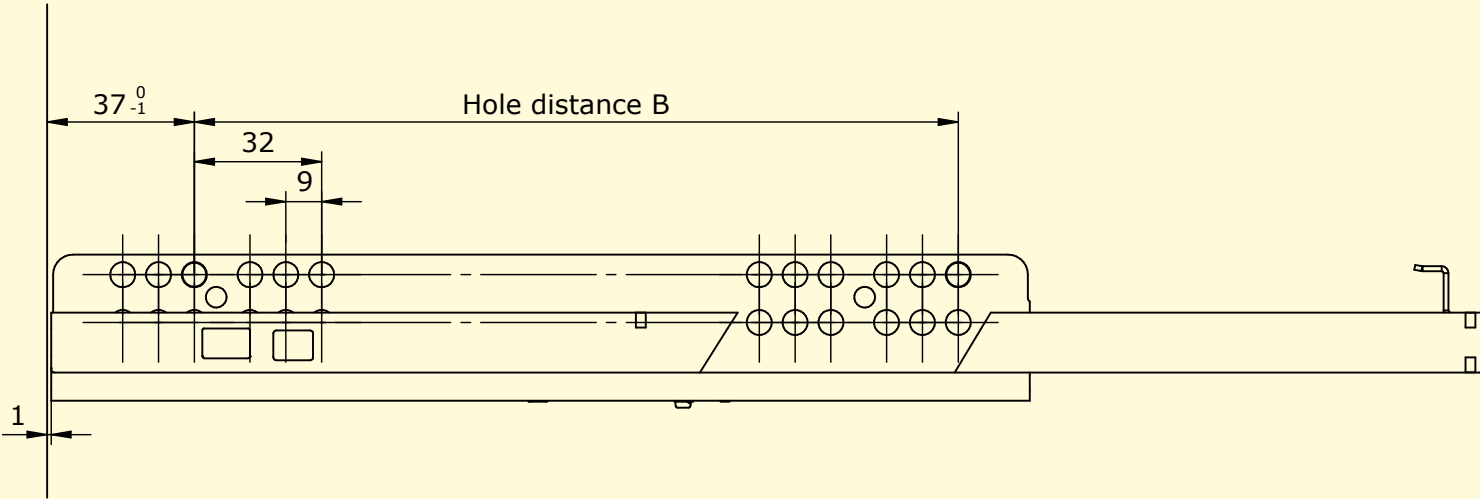


| Drawer length in mm | Cabinet runner in mm | Drawer runner in mm | Soft-close | Runners/Box | Boxes/Pallet maximum | Pieces/Pallet maximum | Weight/Pallet maximum | Order number left side | Order number right side |
|---------------------|----------------------|---------------------|------------|-------------|----------------------|-----------------------|-----------------------|------------------------|-------------------------|
| 250                 | 214                  | 260                 | x          | 40          | 45                   | 1800                  | 610                   | 3612502011500          | 3622502011500           |
| 300                 | 246                  | 310                 | x          | 40          | 35                   | 1400                  | 551                   | 3613002011500          | 3623002011500           |
| 350                 | 246                  | 360                 | x          | 40          | 35                   | 1400                  | 580                   | 3613502011500          | 3623502011500           |
| 400                 | 278                  | 410                 | x          | 32          | 42                   | 1344                  | 625                   | 3614002011500          | 3624002011500           |
| 450                 | 310                  | 460                 | x          | 32          | 42                   | 1344                  | 698                   | 3614502011500          | 3624502011500           |
| 500                 | 342                  | 510                 | x          | 32          | 30                   | 960                   | 553                   | 3615002011500          | 3625002011500           |
| 550                 | 342                  | 560                 | x          | 32          | 30                   | 960                   | 573                   | 3615502011500          | 3625502011500           |

# Single Extension PERFECT EB23


Stub, soft-close and plug-on assembly



## Installation Dimensions

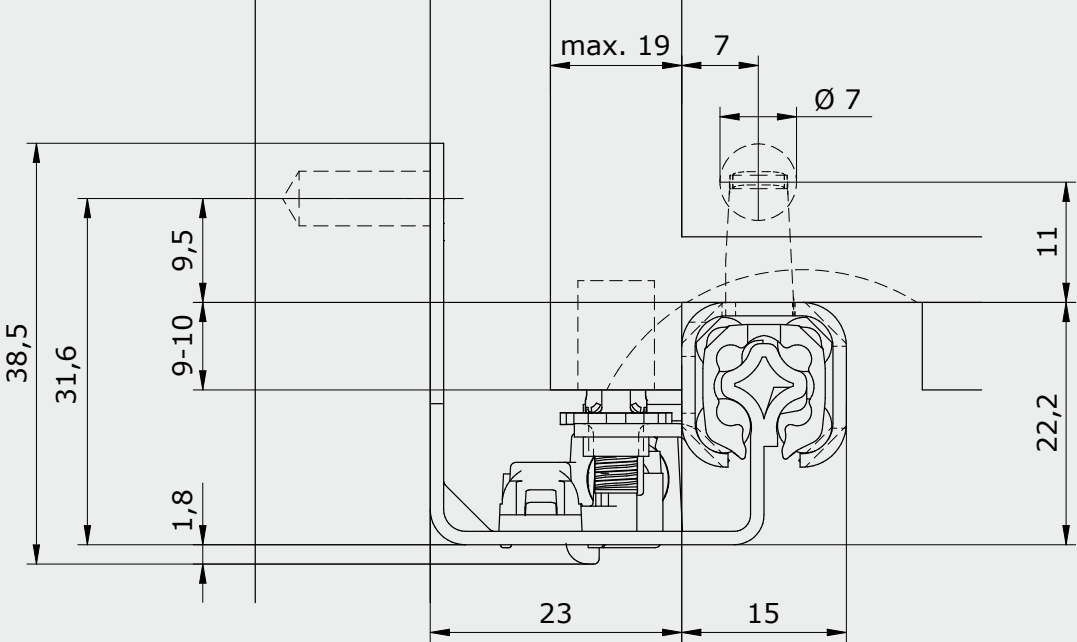


## Length and hole pattern of the cabinet runner

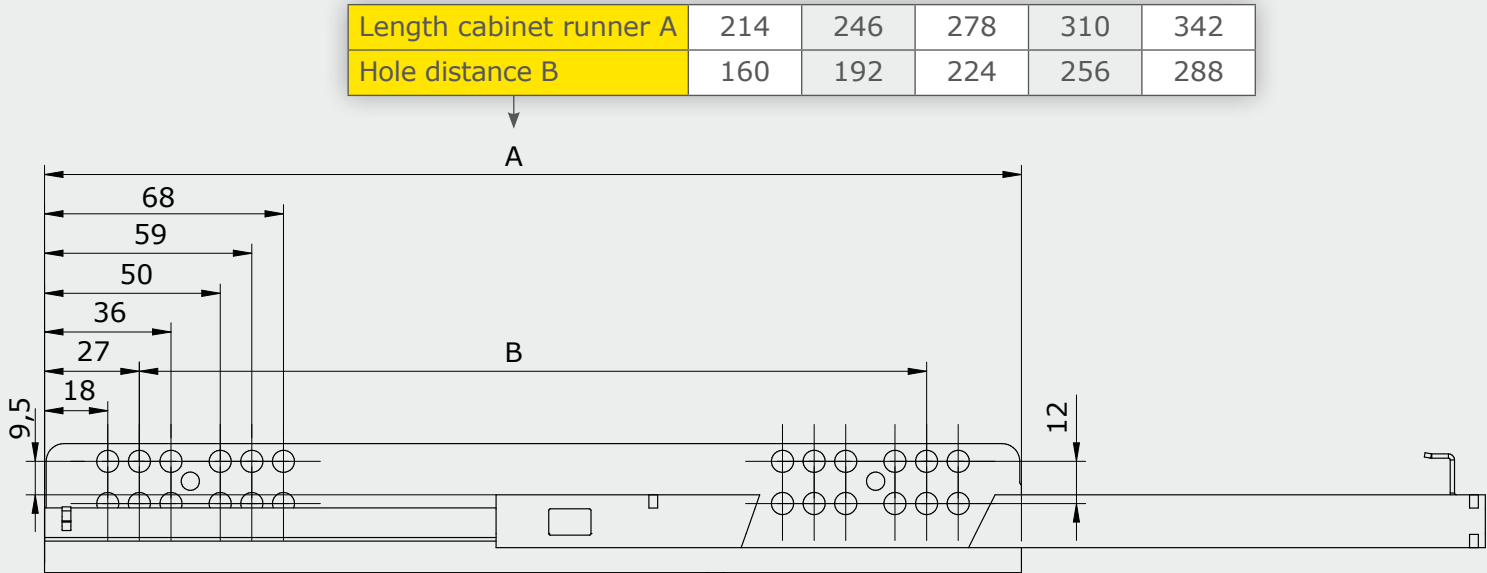


## Features

- Star-shaped profile
- Loading capacity up to 25 kg
- Lengths from 250 to 550 mm
- Quick plug-on assembly of the drawer
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- Installation width 23 mm ( $\leq 19$  mm)
- With soft-close
- Stub version

## Drillings and cut-outs

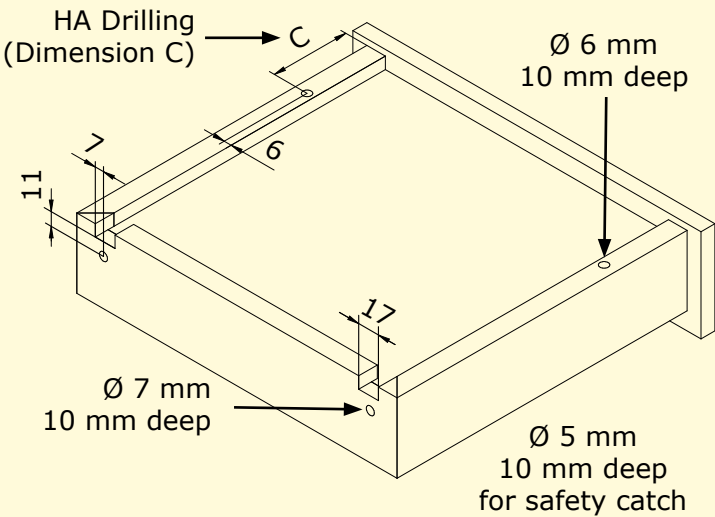

## Drillings in the cabinet

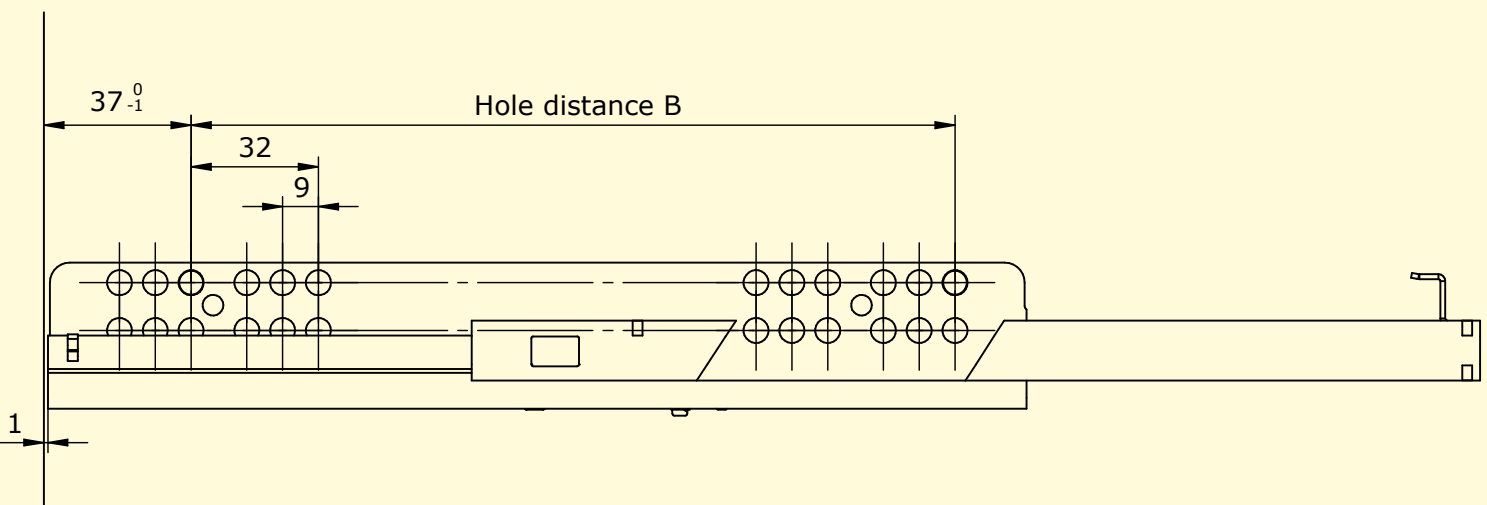


| Drawer length in mm | Cabinet runner in mm | Drawer runner in mm | HA Drilling (Dimension C) | Soft-close | Runners/Box | Boxes/Pallet maximum | Pieces/Pallet maximum | Weight/Pallet maximum | Order number left side | Order number right side |
|---------------------|----------------------|---------------------|---------------------------|------------|-------------|----------------------|-----------------------|-----------------------|------------------------|-------------------------|
| 250                 | 214                  | 220,5               | 61,5                      | x          | 40          | 45                   | 1800                  | 584                   | 3612502031500          | 3622502031500           |
| 300                 | 246                  | 220,5               | 111,5                     | x          | 40          | 35                   | 1400                  | 499                   | 3613002031500          | 3623002031500           |
| 350                 | 246                  | 253,5               | 128,5                     | x          | 40          | 35                   | 1400                  | 519                   | 3613502031500          | 3623502031500           |
| 400                 | 278                  | 281,5               | 150,5                     | x          | 32          | 42                   | 1344                  | 554                   | 3614002031500          | 3624002031500           |
| 450                 | 310                  | 315,5               | 166,5                     | x          | 32          | 42                   | 1344                  | 520                   | 3614502031500          | 3624502031500           |
| 500                 | 342                  | 341,5               | 190,5                     | x          | 32          | 30                   | 960                   | 487                   | 3615002031500          | 3625002031500           |
| 550                 | 342                  | 370,5               | 211,5                     | x          | 32          | 30                   | 960                   | 499                   | 3615502031500          | 3625502031500           |

# Single Extension PERFECT EB23


Soft-close and coupling



## Installation Dimensions

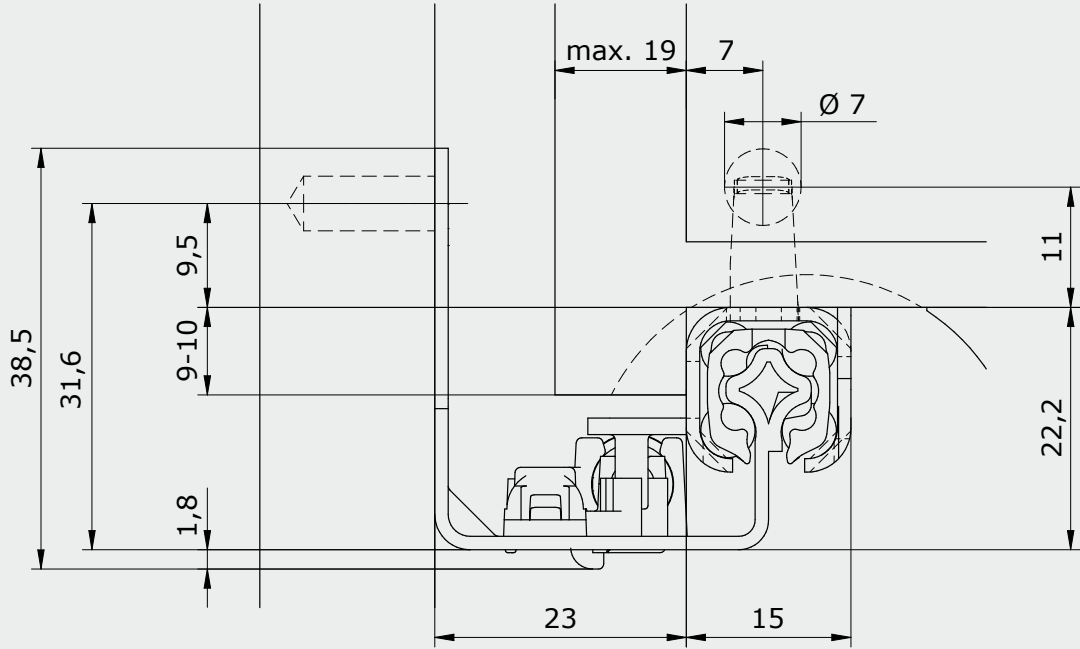

## Length and hole pattern of the cabinet runner

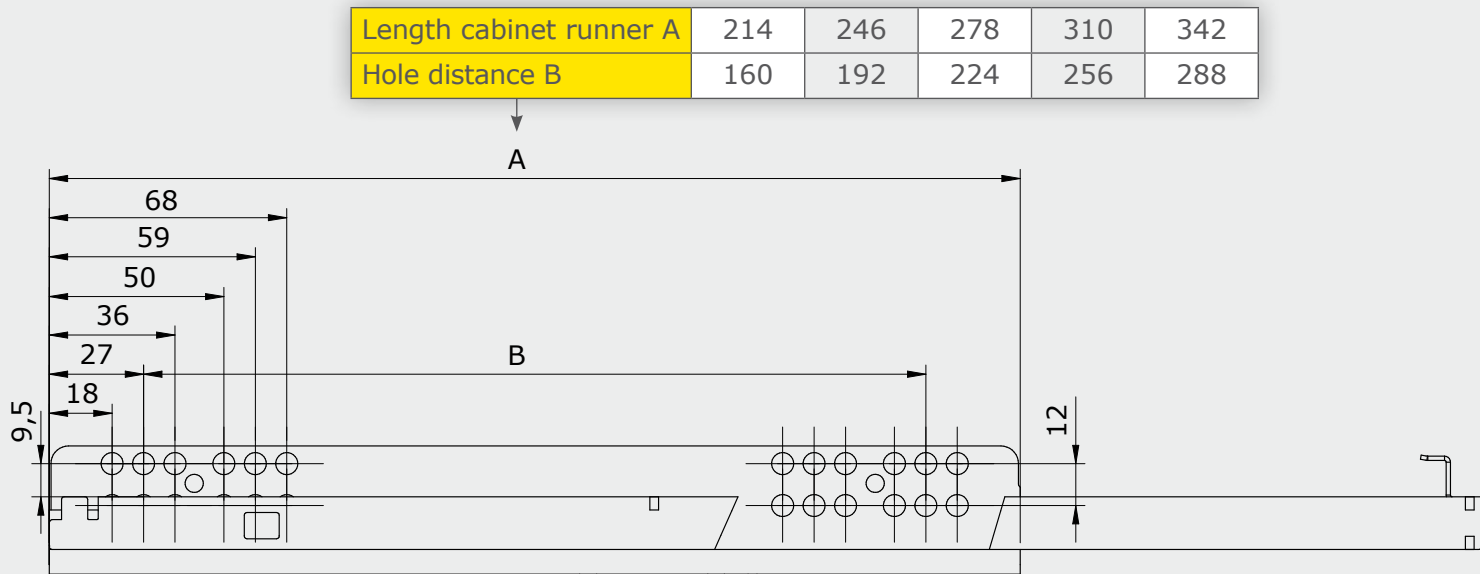


## Features


- Star-shaped profile
- Loading capacity up to 25 kg
- Lengths from 250 to 550 mm
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- Installation width 23 mm ( $\leq 19$  mm)
- With soft-close
- Optionally with 1D or 2D coupling

## Coupling technology

The types of couplings make the mounting and demounting of drawers quick and easy. All in one: safety catch, coupling and alignment. Available either as 1D (height adjustment), or 2D (height and side adjustment). A precise joint pattern can be achieved quickly, easily and without tools.

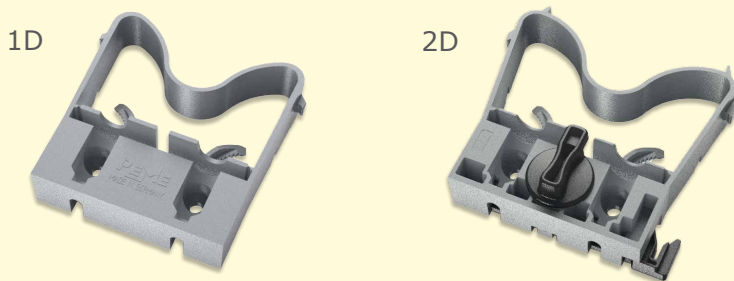

## Drillings in the cabinet

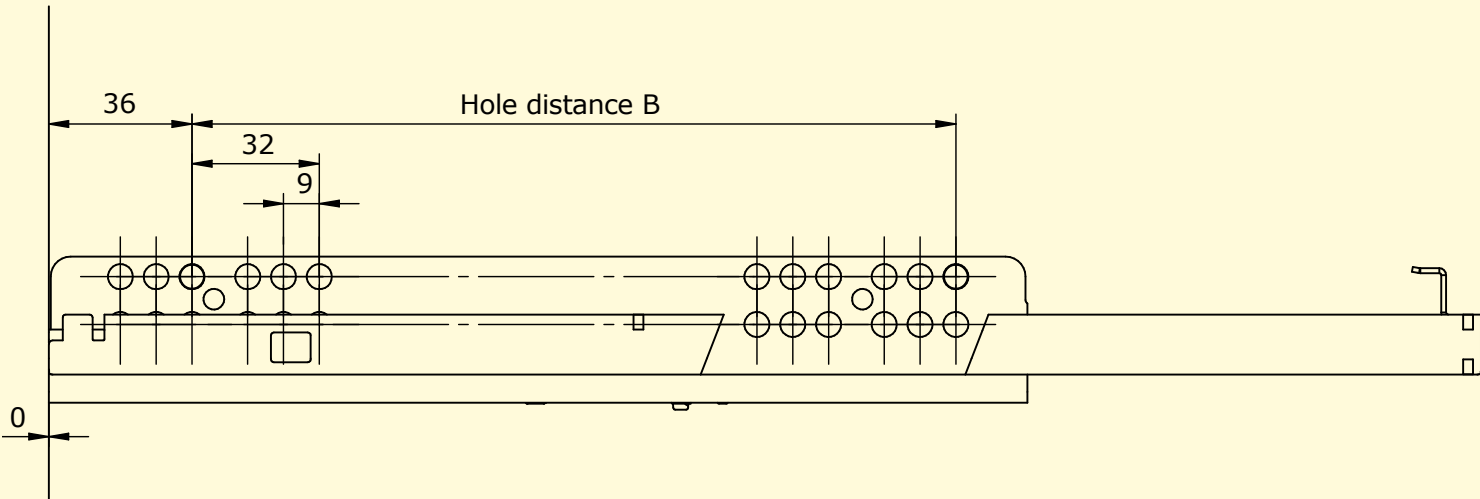


| Drawer length<br>in mm | Cabinet runner<br>in mm | Drawer runner<br>in mm | Soft-close | Runners/Box | Boxes/Pallet<br>maximum | Pieces/Pallet<br>maximum | Weight/Pallet<br>maximum | Order number<br>left side | Order number<br>right side |
|------------------------|-------------------------|------------------------|------------|-------------|-------------------------|--------------------------|--------------------------|---------------------------|----------------------------|
| 250                    | 214                     | 260                    | x          | 40          | 45                      | 1800                     | 602                      | 3612502011100             | 3622502011000              |
| 300                    | 246                     | 310                    | x          | 40          | 35                      | 1400                     | 542                      | 3613002011100             | 3623002011000              |
| 350                    | 246                     | 360                    | x          | 40          | 35                      | 1400                     | 572                      | 3613502011100             | 3623502011000              |
| 400                    | 278                     | 410                    | x          | 32          | 42                      | 1344                     | 618                      | 3614002011100             | 3624002011000              |
| 450                    | 310                     | 460                    | x          | 32          | 42                      | 1344                     | 692                      | 3614502011100             | 3624502011000              |
| 500                    | 342                     | 510                    | x          | 32          | 30                      | 960                      | 548                      | 3615002011100             | 3625002011000              |
| 550                    | 342                     | 560                    | x          | 32          | 30                      | 960                      | 568                      | 3615502011100             | 3625502011000              |

# Single Extension PERFECT EB23


Push-to-Open and plug-on assembly



## Installation Dimensions

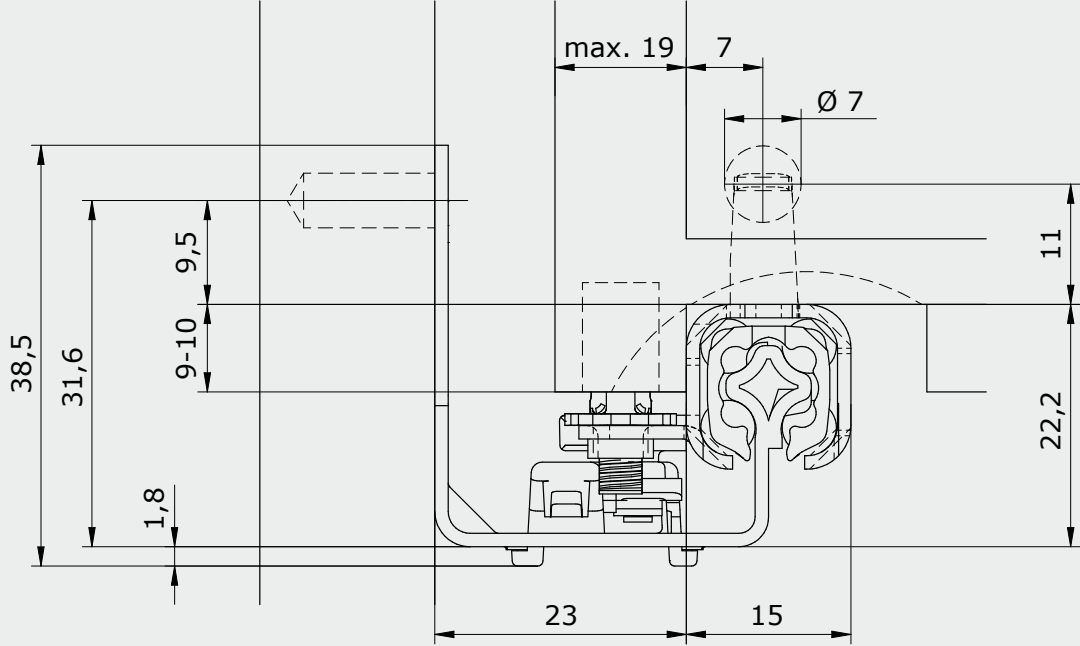


## Length and hole pattern of the cabinet runner

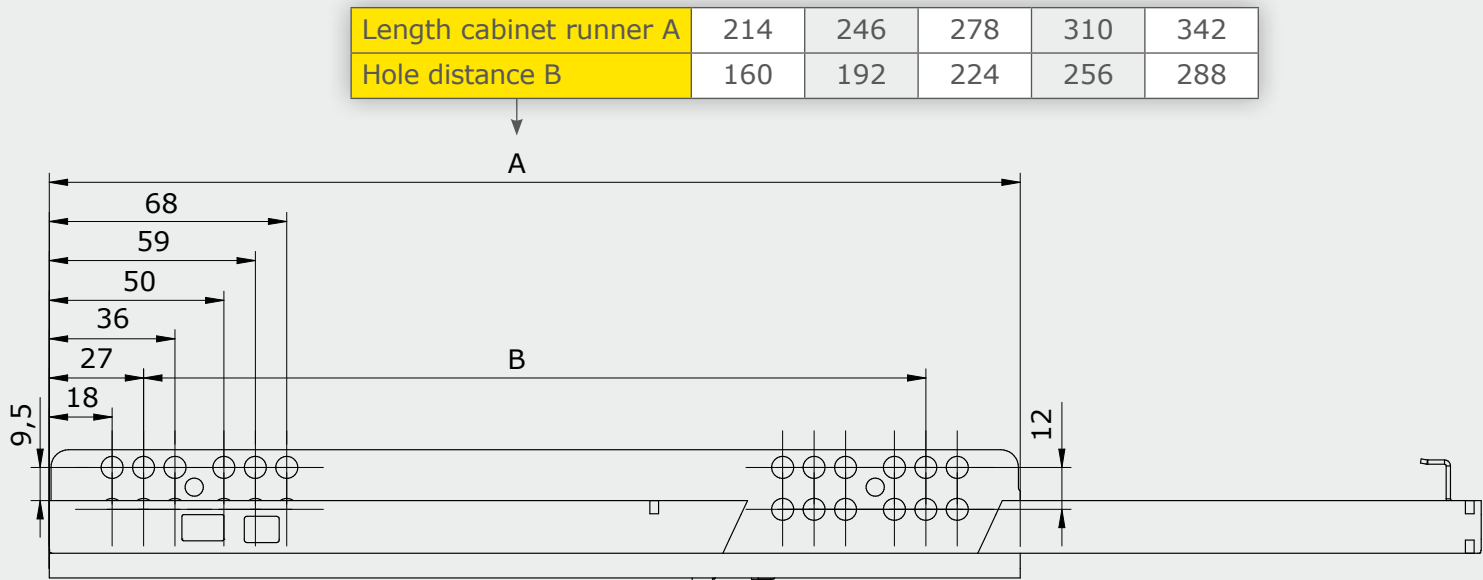


## Features

- Star-shaped profile
- Loading capacity up to 25 kg
- Lengths from 250 to 550 mm
- Quick plug-on assembly of the drawer
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- Installation width 23 mm ( $\leq 19$  mm)
- Trigger path/reveal gap = 3 mm
- With push-to-open

## Drillings and cut-outs

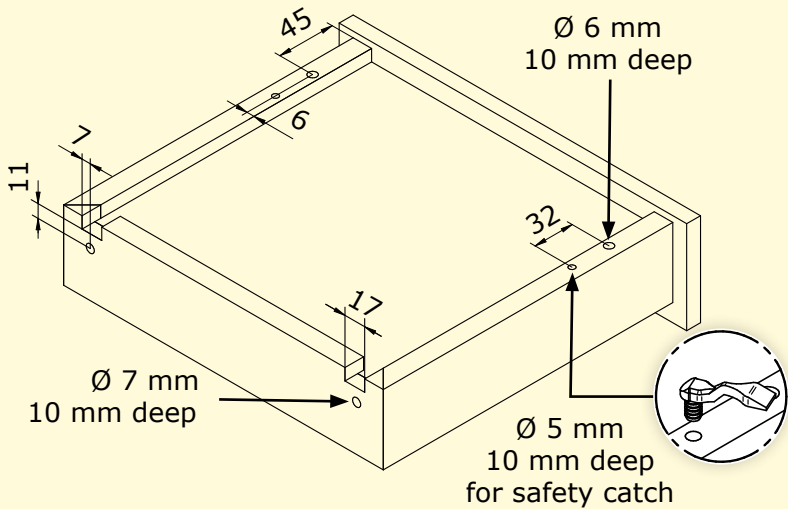

## Drillings in the cabinet

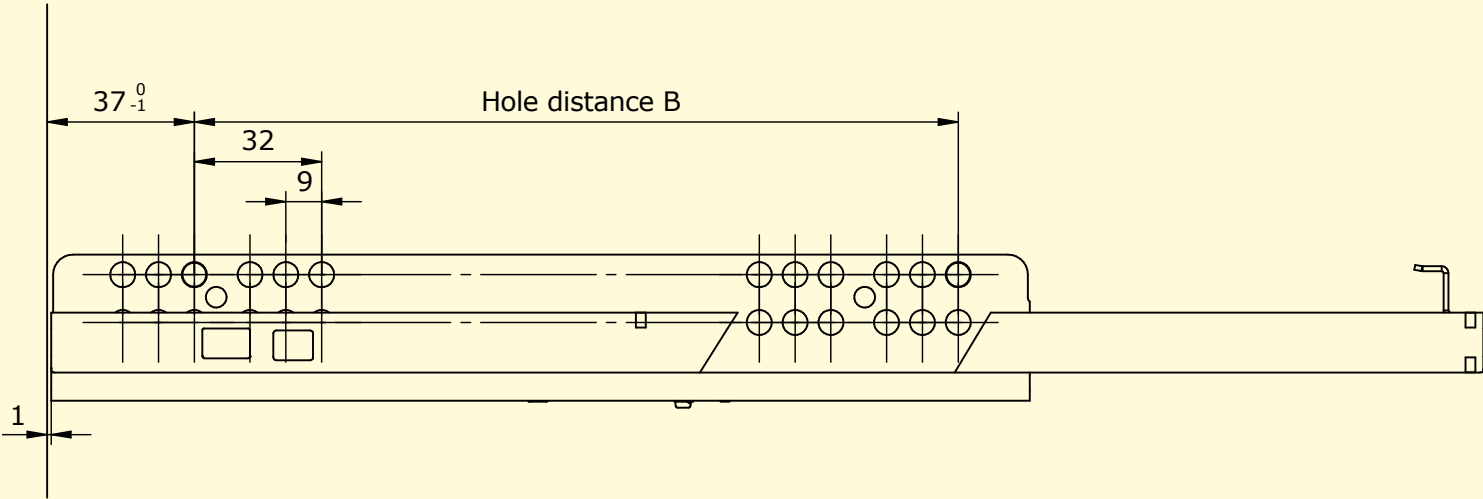


| Drawer length in mm | Cabinet runner in mm | Drawer runner in mm | Push-to-Open | Runners/Box | Boxes/Pallet maximum | Pieces/Pallet maximum | Weight/Pallet maximum | Order number left side | Order number right side |
|---------------------|----------------------|---------------------|--------------|-------------|----------------------|-----------------------|-----------------------|------------------------|-------------------------|
| 250                 | 214                  | 260                 | x            | 40          | 45                   | 1800                  | 580                   | 3612503001500          | 3622503001500           |
| 300                 | 246                  | 310                 | x            | 40          | 35                   | 1400                  | 527                   | 3613003001500          | 3623003001500           |
| 350                 | 246                  | 360                 | x            | 40          | 35                   | 1400                  | 556                   | 3613503001500          | 3623503001500           |
| 400                 | 278                  | 410                 | x            | 32          | 42                   | 1344                  | 602                   | 3614003001500          | 3624003001500           |
| 450                 | 310                  | 460                 | x            | 32          | 42                   | 1344                  | 674                   | 3614503001500          | 3624503001500           |
| 500                 | 342                  | 510                 | x            | 32          | 30                   | 960                   | 537                   | 3615003001500          | 3625003001500           |
| 550                 | 342                  | 560                 | x            | 32          | 30                   | 960                   | 558                   | 3615503001500          | 3625503001500           |

# Single Extension PERFECT EB23


Push-to-Open and coupling



## Installation Dimensions

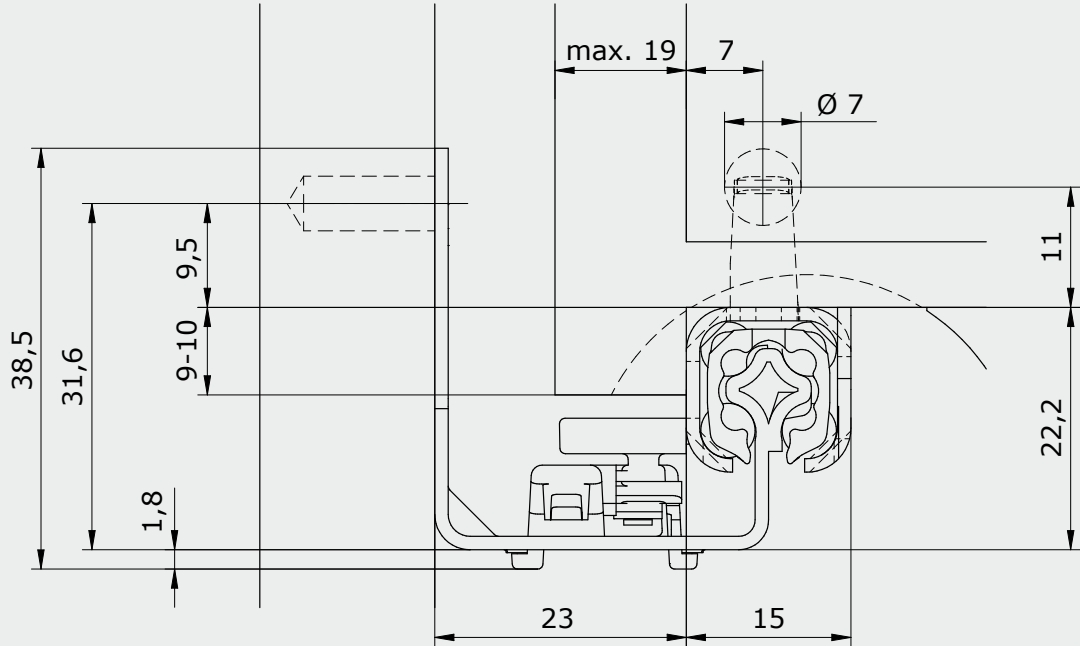

## Length and hole pattern of the cabinet runner

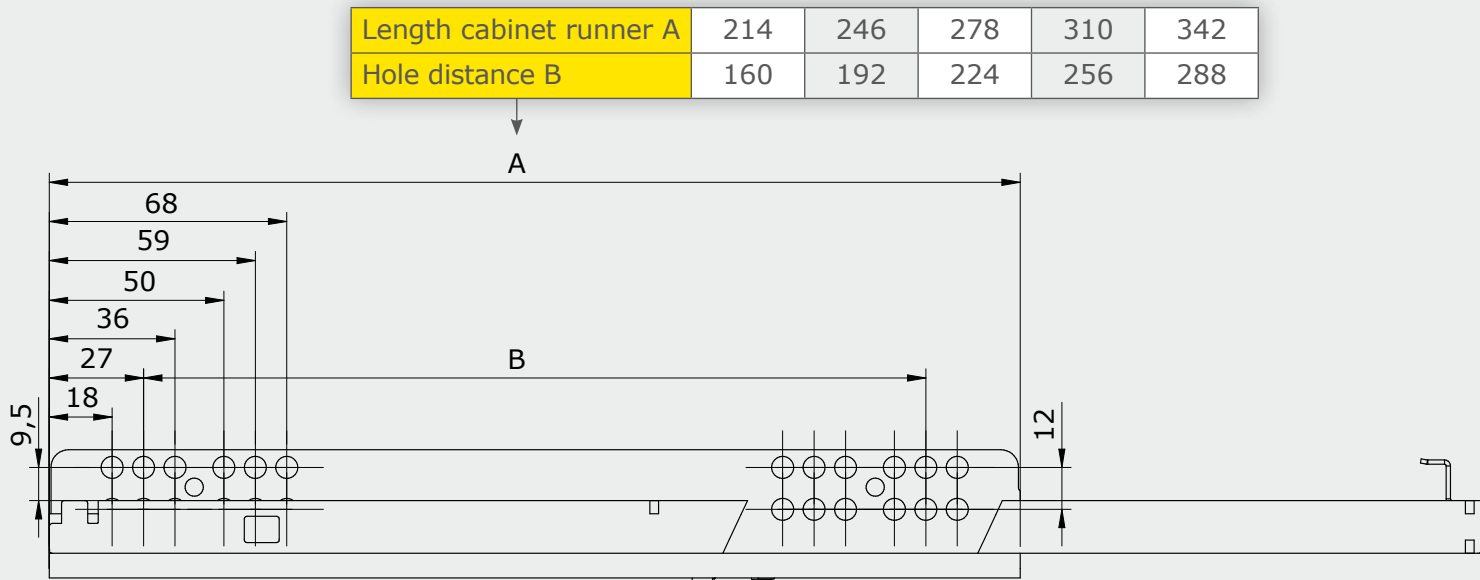


## Features


- Star-shaped profile
- Loading capacity up to 25 kg
- Lengths from 250 to 550 mm
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- Installation width 23 mm ( $\leq 19$  mm)
- Trigger path/reveal gap = 3 mm
- With push-to-open
- Optionally with 1D or 2D coupling

## Coupling technology

The types of couplings make the mounting and demounting of drawers quick and easy. All in one: safety catch, coupling and alignment. Available either as 1D (height adjustment), or 2D (height and side adjustment). A precise joint pattern can be achieved quickly, easily and without tools.

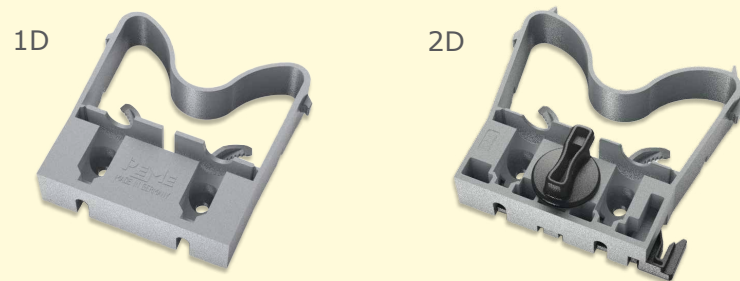

## Drillings in the cabinet

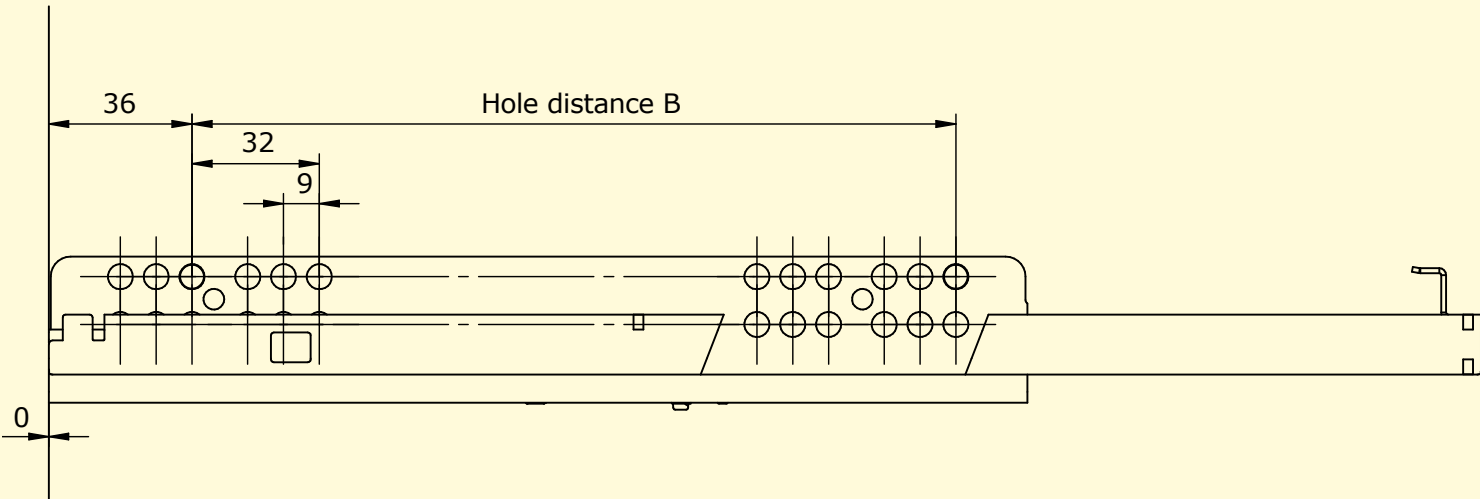


| Drawer length in mm | Cabinet runner in mm | Drawer runner in mm | Push-to-Open | Runners/Box | Boxes/Pallet maximum | Pieces/Pallet maximum | Weight/Pallet maximum | Order number left side | Order number right side |
|---------------------|----------------------|---------------------|--------------|-------------|----------------------|-----------------------|-----------------------|------------------------|-------------------------|
| 250                 | 214                  | 260                 | x            | 40          | 45                   | 1800                  | 570                   | 3612503001100          | 3622503001000           |
| 300                 | 246                  | 310                 | x            | 40          | 35                   | 1400                  | 518                   | 3613003001100          | 3623003001000           |
| 350                 | 246                  | 360                 | x            | 40          | 35                   | 1400                  | 547                   | 3613503001100          | 3623503001000           |
| 400                 | 278                  | 410                 | x            | 32          | 42                   | 1344                  | 594                   | 3614003001100          | 3624003001000           |
| 450                 | 310                  | 460                 | x            | 32          | 42                   | 1344                  | 667                   | 3614503001100          | 3624503001000           |
| 500                 | 342                  | 510                 | x            | 32          | 30                   | 960                   | 529                   | 3615003001100          | 3625003001000           |
| 550                 | 342                  | 560                 | x            | 32          | 30                   | 960                   | 552                   | 3615503001100          | 3625503001000           |

# Single Extension PERFECT EB23

Soft-close and plug-on assembly




## Installation Dimensions

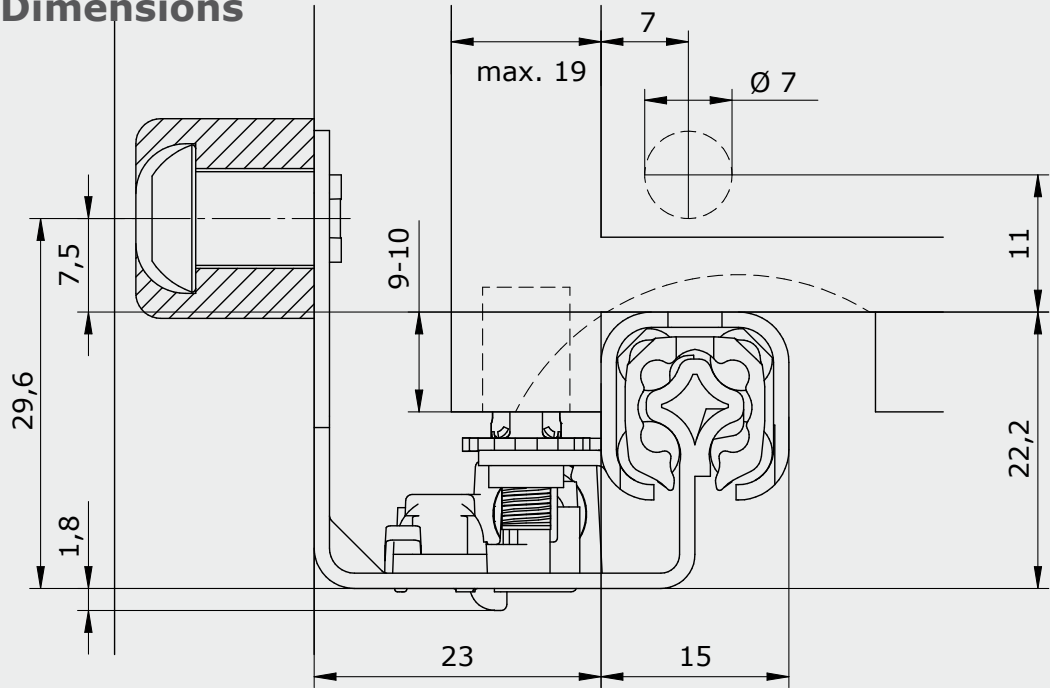

## Length and hole pattern of the cabinet runner


|                         |     |     |     |     |     |
|-------------------------|-----|-----|-----|-----|-----|
| Length cabinet runner A | 214 | 246 | 278 | 310 | 342 |
| Hole distance B         | 160 | 192 | 224 | 256 | 288 |

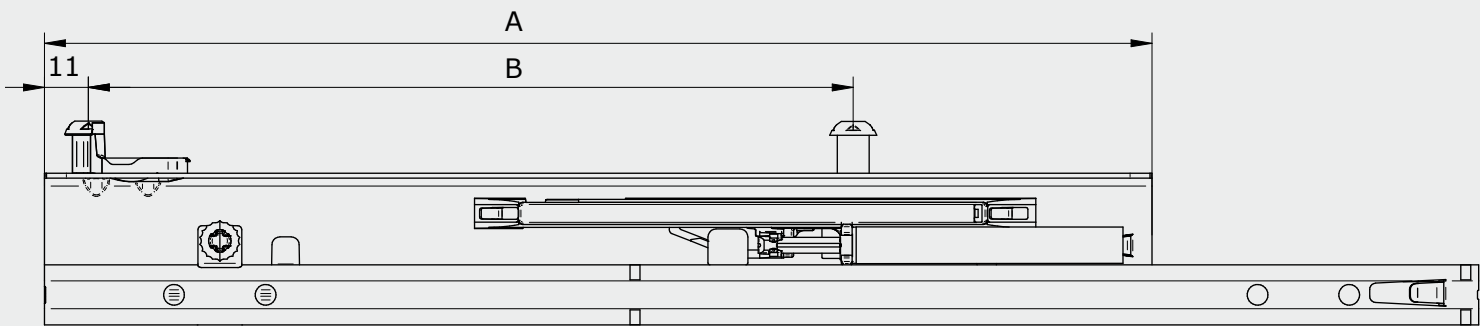


## Features

- Star-shaped profile
- Loading capacity up to 25 kg
- Lengths from 250 to 550 mm
- Quick plug-on assembly of the drawer
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- Installation width 23 mm ( $\leq 19$  mm)
- With soft-close

## Drillings and cut-outs

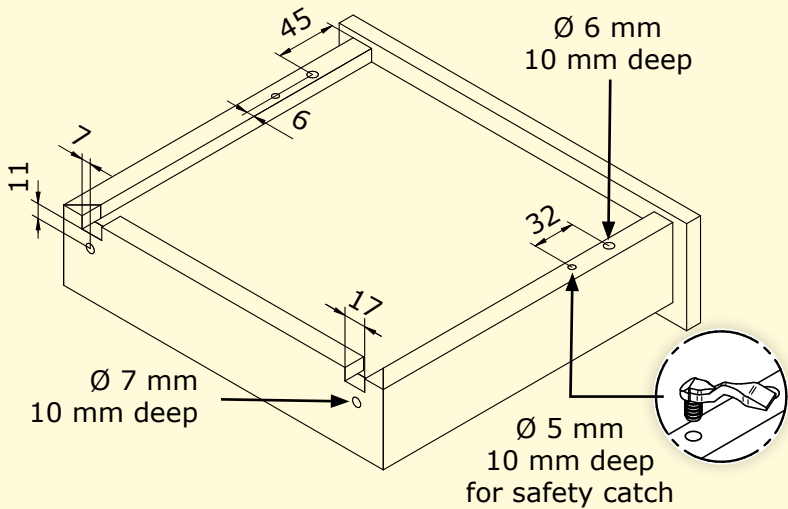

## Drillings in the cabinet

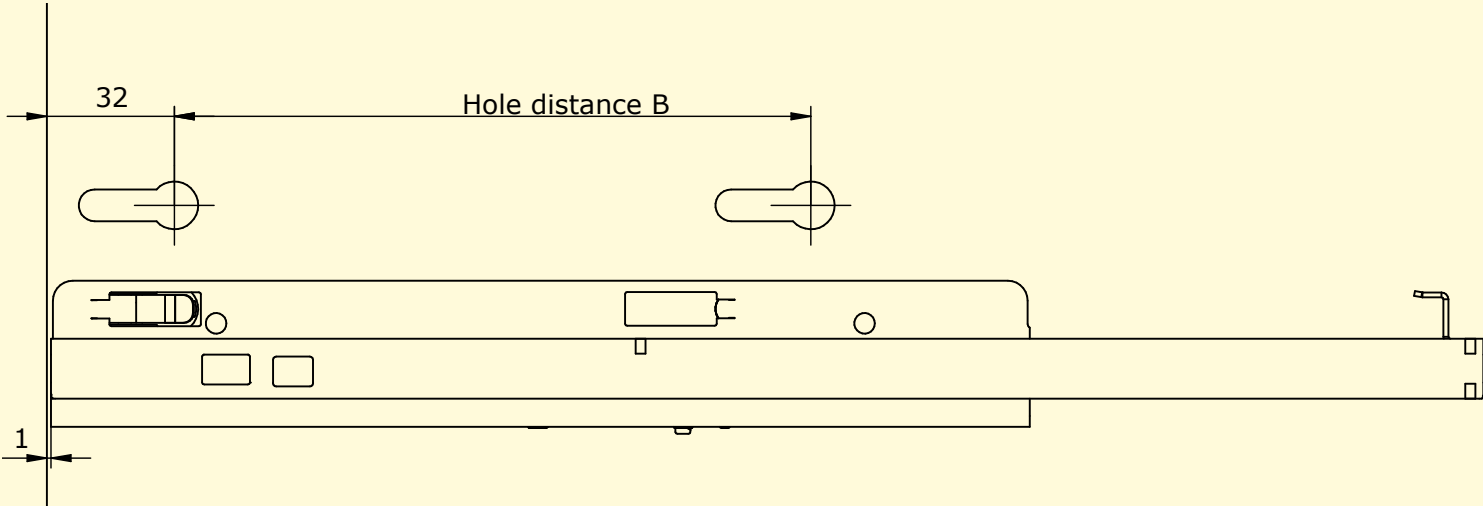

| Drawer length<br>in mm | Cabinet runner<br>in mm | Drawer runner<br>in mm | Soft-close | Runners/Box | Boxes/Pallet<br>maximum | Pieces/Pallet<br>maximum | Weight/Pallet<br>maximum | Order number<br>left side | Order number<br>right side |
|------------------------|-------------------------|------------------------|------------|-------------|-------------------------|--------------------------|--------------------------|---------------------------|----------------------------|
| 250                    | 214                     | 260                    | x          | 40          | 45                      | 1800                     | 610                      | 3612502011500             | 3622502011500              |
| 300                    | 246                     | 310                    | x          | 40          | 35                      | 1400                     | 551                      | 3613002011500             | 3623002011500              |
| 350                    | 246                     | 360                    | x          | 40          | 35                      | 1400                     | 580                      | 3613502011500             | 3623502011500              |
| 400                    | 278                     | 410                    | x          | 32          | 42                      | 1344                     | 625                      | 3614002011500             | 3624002011500              |
| 450                    | 310                     | 460                    | x          | 32          | 42                      | 1344                     | 698                      | 3614502011500             | 3624502011500              |
| 500                    | 342                     | 510                    | x          | 32          | 30                      | 960                      | 553                      | 3615002011500             | 3625002011500              |
| 550                    | 342                     | 560                    | x          | 32          | 30                      | 960                      | 573                      | 3615502011500             | 3625502011500              |



## Full Extension EXTREME

|                              |         |
|------------------------------|---------|
| Self-close                   | Page 58 |
| Soft-close                   | Page 64 |
| Push-to-Open                 | Page 72 |
| Push-to-Open synchronization | Page 76 |

### Product


EXTREME remains calm even under the highest demands. Its uniform geometry skillfully absorbs incorrect loads. The full-extension runner is characterized by its very smooth and precise running characteristics. It therefore meets all the functional requirements of modern living - ideal for any wooden drawer.

### Variants

The EXTREME full-extension runner is available with self-close, with soft-close and with the push-to-open. The following options are available for attaching and detaching drawers: plug-on assembly, 1D coupling and 2D coupling. The EXTREME full-extension runner offers two anti-lift systems for drawer locking.




Installation Dimensions

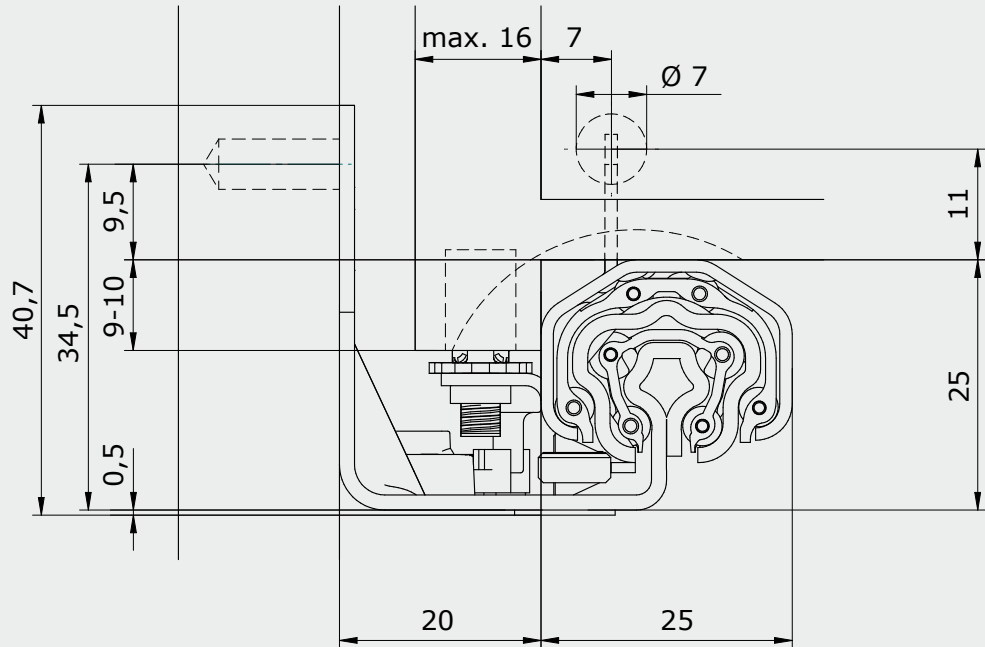

Length and hole pattern of the cabinet runner


|                         |     |     |     |     |     |
|-------------------------|-----|-----|-----|-----|-----|
| Length cabinet runner A | 214 | 246 | 278 | 310 | 342 |
| Hole distance B         | 160 | 192 | 224 | 256 | 288 |

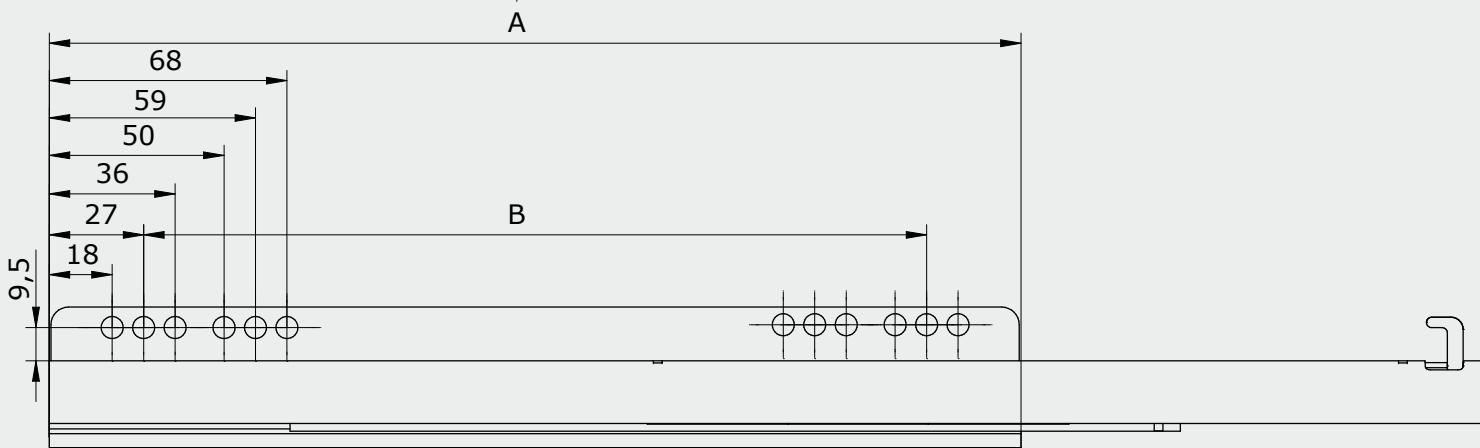


Features

- Star-shaped profile
- Loading capacity up to 30 kg
- Lengths from 250 to 550 mm
- Quick plug-on assembly of the drawer
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- With self-close

Drillings and cut-outs

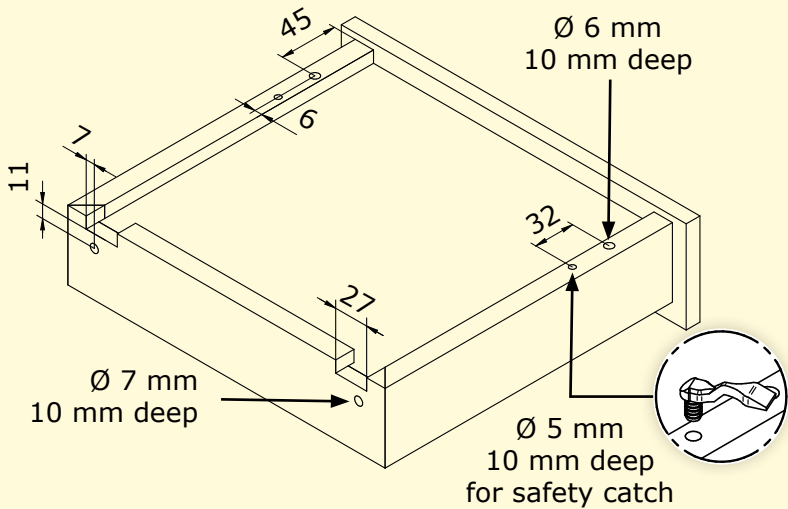

Drillings in the cabinet

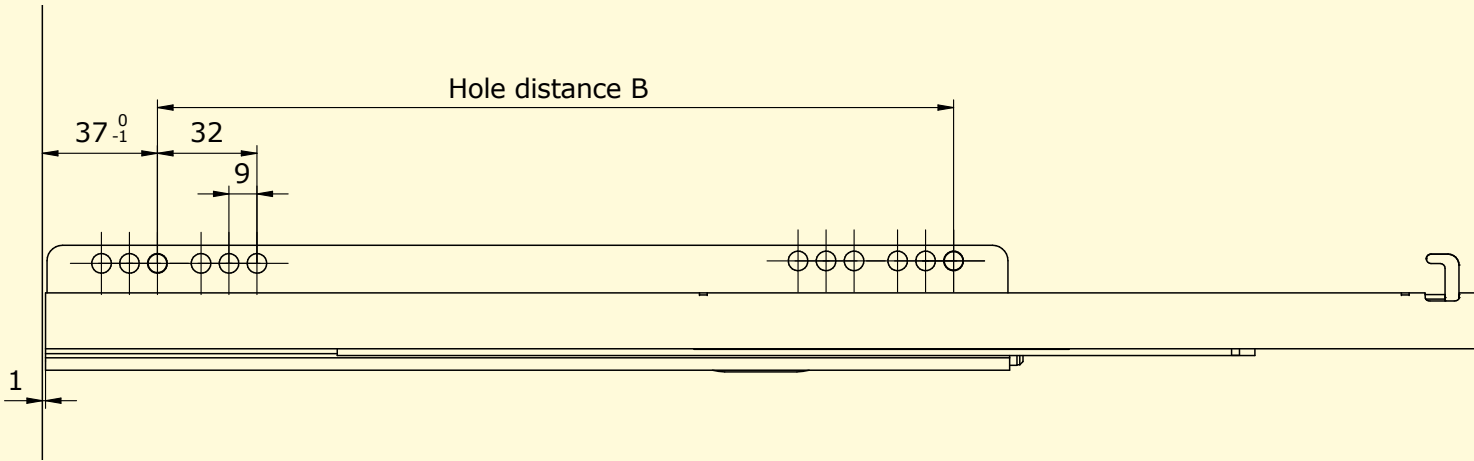


| Drawer length<br>in mm | Cabinet runner<br>in mm | Middle runner<br>in mm | Drawer runner<br>in mm | Self-close | Runners/Box | Boxes/Pallet<br>maximum | Pieces/Pallet<br>maximum | Weight/Pallet<br>maximum | Order number<br>left side | Order number<br>right side |
|------------------------|-------------------------|------------------------|------------------------|------------|-------------|-------------------------|--------------------------|--------------------------|---------------------------|----------------------------|
| 250                    | 214                     | 214,3                  | 260                    | x          | 24          | 48                      | 1152                     | 642                      | 4112501001500             | 4122501001500              |
| 300                    | 246                     | 254,7                  | 310                    | x          | 24          | 50                      | 1200                     | 774                      | 4113001001500             | 4123001001500              |
| 350                    | 246                     | 254,7                  | 360                    | x          | 24          | 50                      | 1200                     | 805                      | 4113501001500             | 4123501001500              |
| 400                    | 278                     | 254,7                  | 410                    | x          | 24          | 35                      | 840                      | 622                      | 4114001001500             | 4124001001500              |
| 450                    | 310                     | 295,1                  | 460                    | x          | 24          | 35                      | 840                      | 696                      | 4114501001500             | 4124501001500              |
| 500                    | 310                     | 295,1                  | 510                    | x          | 24          | 30                      | 720                      | 618                      | 4115001001500             | 4125001001500              |
| 550                    | 342                     | 375,9                  | 560                    | x          | 24          | 30                      | 720                      | 698                      | 4115501001500             | 4125501001500              |

# Full Extension EXTREME


Self-close, plug-on assembly and Lift Lock



## Installation Dimensions

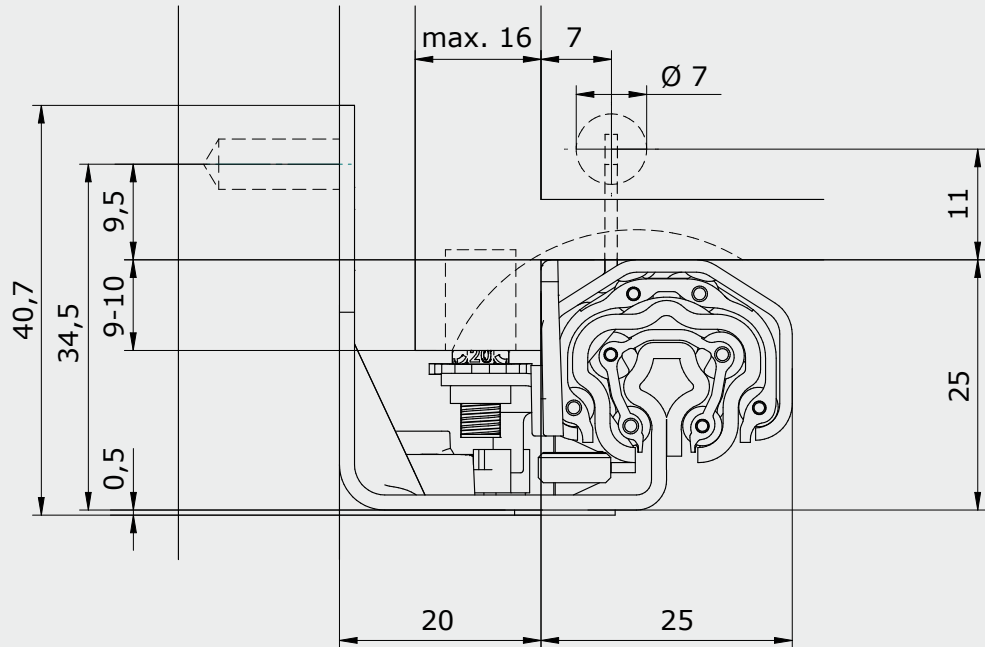


## Length and hole pattern of the cabinet runner

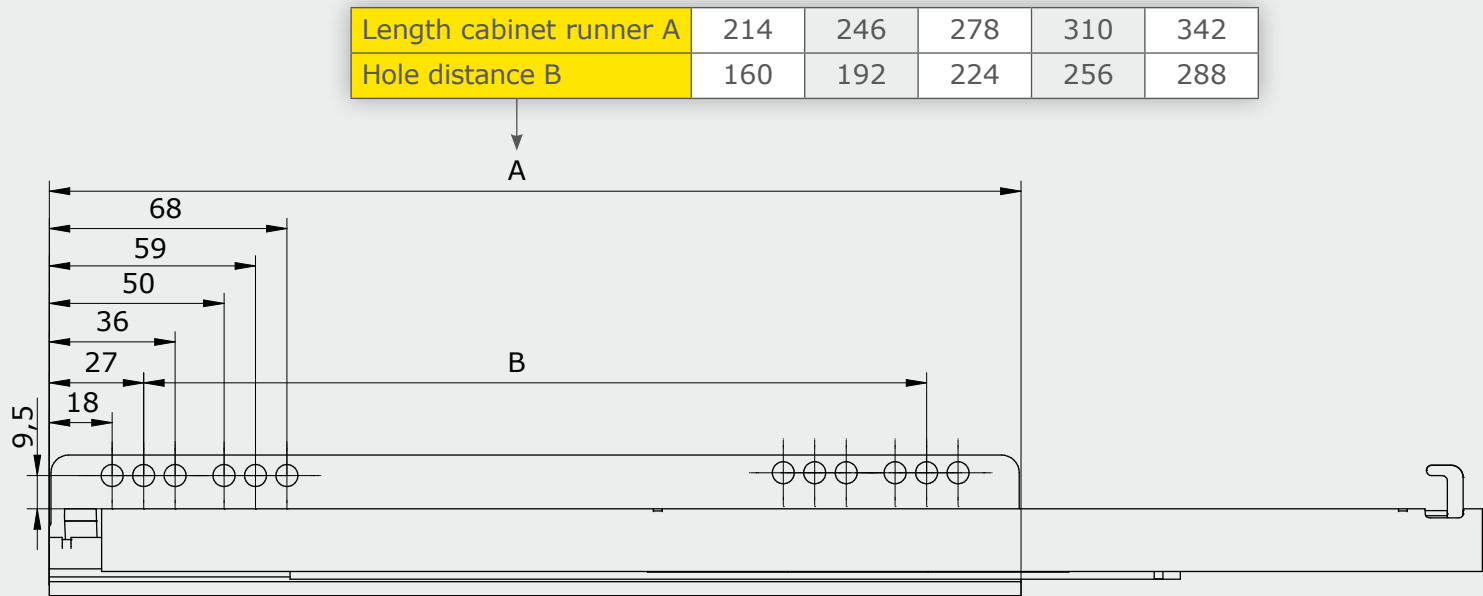


## Features

- Star-shaped profile
- Loading capacity up to 30 kg
- Lengths from 250 to 550 mm
- Quick plug-on assembly of the drawer
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- With self-close
- With pre-assembled safety catch

## Drillings and cut-outs

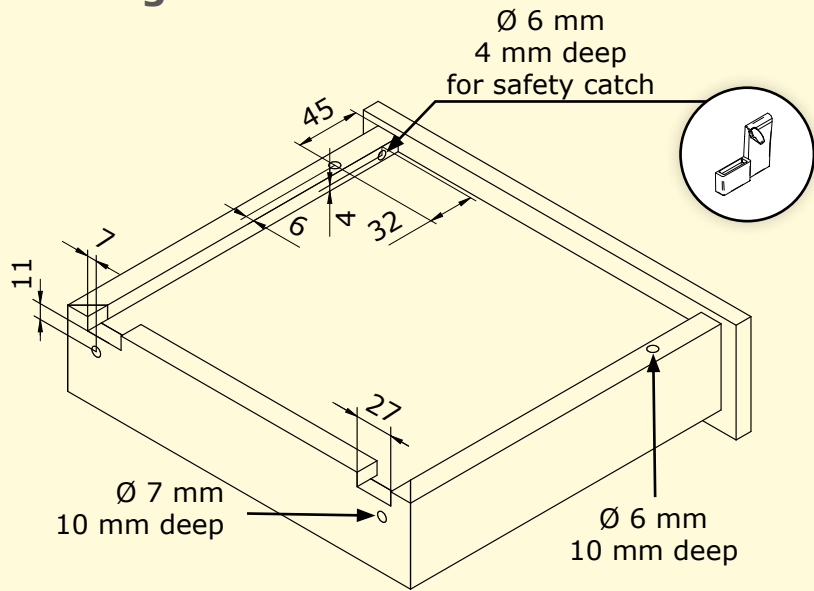

## Drillings in the cabinet

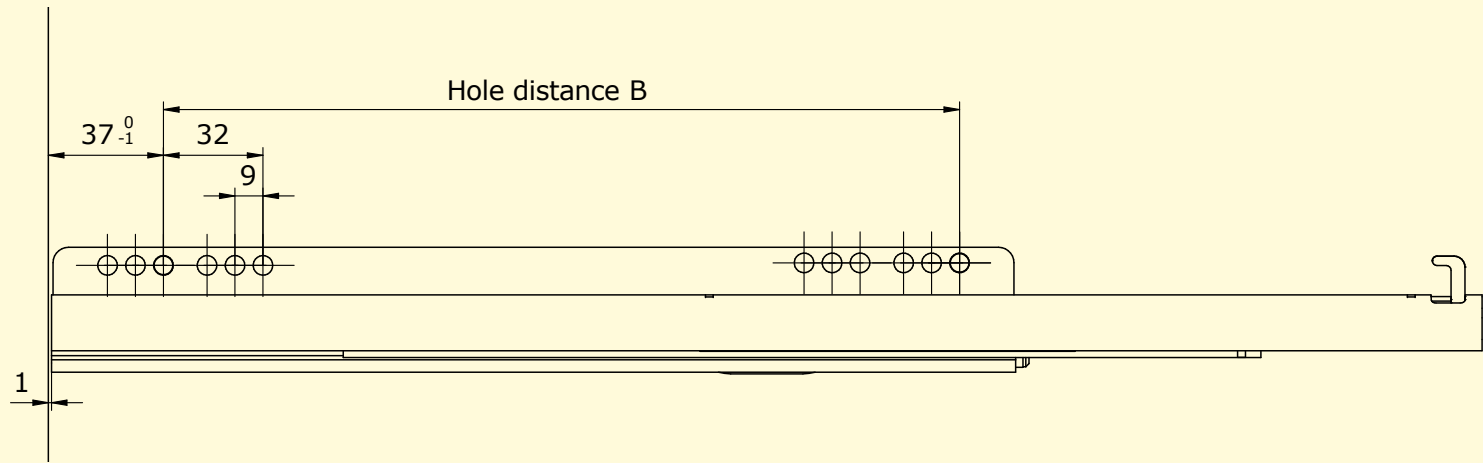

| Drawer length<br>in mm | Cabinet runner<br>in mm | Middle runner<br>in mm | Drawer runner<br>in mm | Self-close | Runners/Box | Boxes/Pallet<br>maximum | Pieces/Pallet<br>maximum | Weight/Pallet<br>maximum | Order number<br>left side | Order number<br>right side |
|------------------------|-------------------------|------------------------|------------------------|------------|-------------|-------------------------|--------------------------|--------------------------|---------------------------|----------------------------|
| 250                    | 214                     | 214,3                  | 245                    | x          | 24          | 48                      | 1152                     | 630                      | 4112501001200             | 4122501001200              |
| 300                    | 246                     | 254,7                  | 295                    | x          | 24          | 50                      | 1200                     | 765                      | 4113001001200             | 4123001001200              |
| 350                    | 246                     | 254,7                  | 345                    | x          | 24          | 50                      | 1200                     | 735                      | 4113501001200             | 4123501001200              |
| 400                    | 278                     | 254,7                  | 395                    | x          | 24          | 35                      | 840                      | 616                      | 4114001001200             | 4124001001200              |
| 450                    | 310                     | 295,1                  | 445                    | x          | 24          | 35                      | 840                      | 683                      | 4114501001200             | 4124501001200              |
| 500                    | 310                     | 295,1                  | 495                    | x          | 24          | 30                      | 720                      | 613                      | 4115001001200             | 4125001001200              |
| 550                    | 342                     | 375,9                  | 545                    | x          | 24          | 30                      | 720                      | 693                      | 4115501001200             | 4125501001200              |

## Self-close and coupling




Technical drawing of a mechanical component, likely a pump or valve assembly, showing dimensions in millimeters (mm). The drawing includes a side view and a top view.

**Dimensions:**


- Overall height: 40,7
- Height of the main body: 34,5
- Height of the top section: 9,5
- Height of the bottom section: 9,5
- Height of the base: 0,5
- Overall width: 25
- Width of the main body: 20
- Width of the top section: 7
- Maximum width of the top section: max. 16
- Inner diameter of the top section: Ø 7

|                         |     |     |     |     |     |
|-------------------------|-----|-----|-----|-----|-----|
| Length cabinet runner A | 214 | 246 | 278 | 310 | 342 |
| Hole distance B         | 160 | 192 | 224 | 256 | 288 |

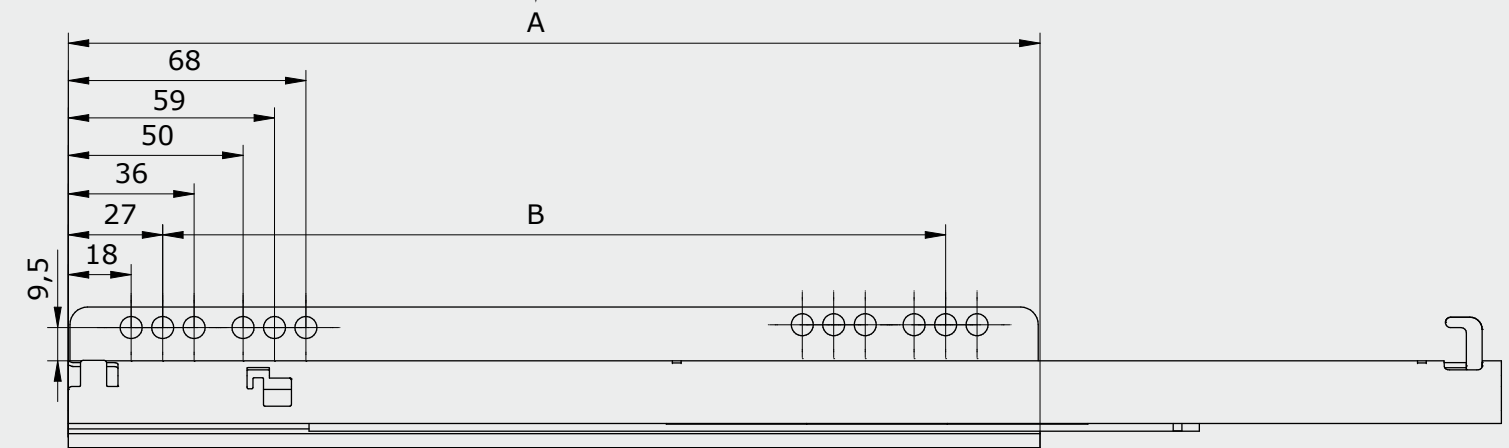

- Star-shaped profile
- Loading capacity up to 30 kg
- Lengths from 250 to 550 mm
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- With self-close
- Optionally with 1D or 2D coupling

The types of couplings make the mounting and demounting of drawers quick and easy. All in one: safety catch, coupling and alignment. Available either as 1D (height adjustment), or 2D (height and side adjustment). A precise joint pattern can be achieved quickly, easily and without tools.

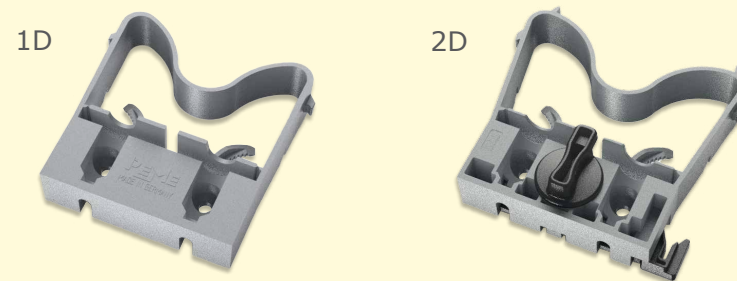

Technical drawing of a mechanical part, likely a bracket or support, showing dimensions and hole placement. The drawing includes a side view and a top view.

**Dimensions:**

- 36:** Distance from the left edge to the center of the first hole in the top row.
- 32:** Distance between the centers of the first and second holes in the top row.
- 9:** Distance between the centers of the second and third holes in the top row.
- Hole distance B:** Total distance between the center of the first hole and the center of the last hole in the top row.
- 0:** Dimension indicating the start of the part from the left edge.


**Features:**

- Holes:** Two rows of holes. The top row has 6 holes, and the bottom row has 6 holes.
- Mounting Features:** A vertical flange on the left and a horizontal flange on the right, both with mounting holes.
- Internal Structure:** A central horizontal section with a vertical support structure.

| Drawer length<br>in mm | Cabinet runner<br>in mm | Middle runner<br>in mm | Drawer runner<br>in mm | Self-close | Runners/Box | Boxes/Pallet<br>maximum | Pieces/Pallet<br>maximum | Weight/Pallet<br>maximum | Order number<br>left side | Order number<br>right side |
|------------------------|-------------------------|------------------------|------------------------|------------|-------------|-------------------------|--------------------------|--------------------------|---------------------------|----------------------------|
| 250                    | 214                     | 214,3                  | 260                    | x          | 24          | 48                      | 1152                     | 637                      | 4112501001100             | 4122501001000              |
| 300                    | 246                     | 254,7                  | 310                    | x          | 24          | 50                      | 1200                     | 770                      | 4113001001100             | 4123001001000              |
| 350                    | 246                     | 254,7                  | 360                    | x          | 24          | 50                      | 1200                     | 800                      | 4113501001100             | 4123501001000              |
| 400                    | 278                     | 254,7                  | 410                    | x          | 24          | 35                      | 840                      | 620                      | 4114001001100             | 4124001001000              |
| 450                    | 310                     | 295,1                  | 460                    | x          | 24          | 35                      | 840                      | 694                      | 4114501001100             | 4124501001000              |
| 500                    | 310                     | 295,1                  | 510                    | x          | 24          | 30                      | 720                      | 615                      | 4115001001100             | 4125001001000              |
| 550                    | 342                     | 375,9                  | 560                    | x          | 24          | 30                      | 720                      | 696                      | 4115501001100             | 4125501001000              |




Installation Dimensions

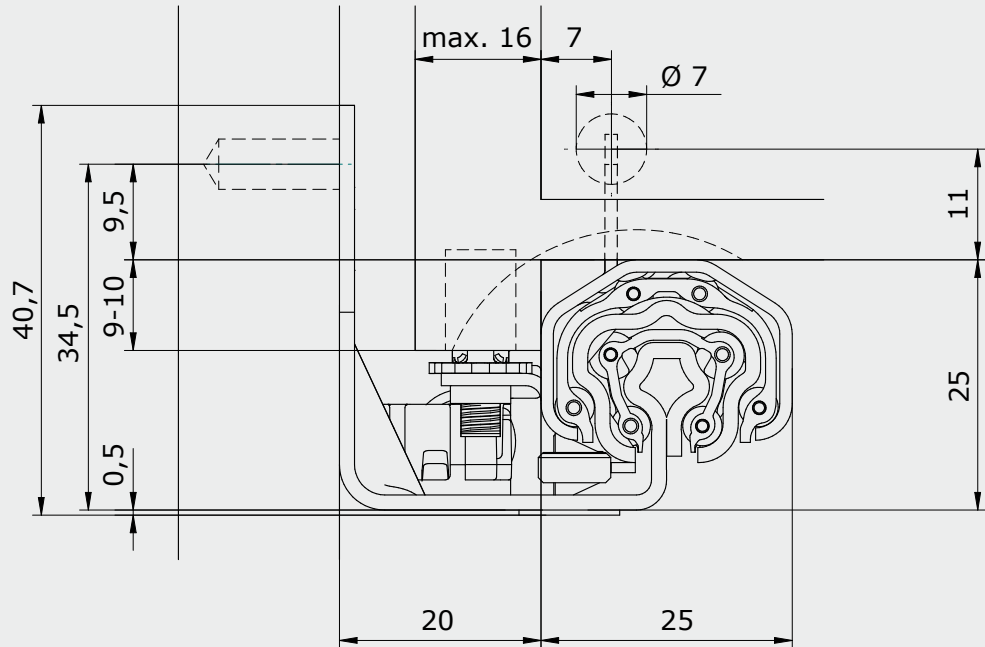

Length and hole pattern of the cabinet runner


|                         |     |     |     |     |     |
|-------------------------|-----|-----|-----|-----|-----|
| Length cabinet runner A | 214 | 246 | 278 | 310 | 342 |
| Hole distance B         | 160 | 192 | 224 | 256 | 288 |

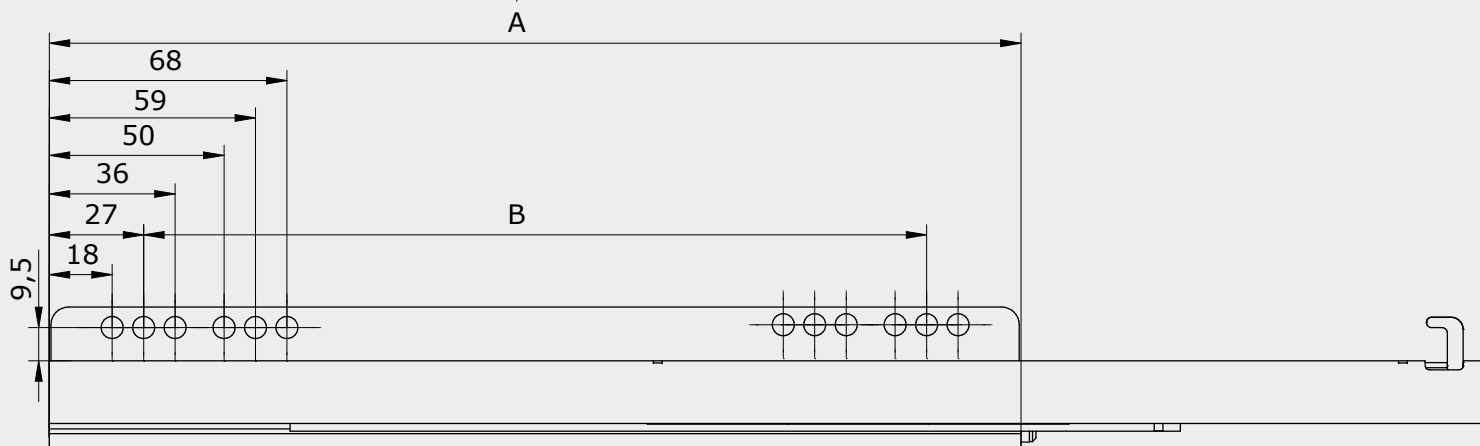


Features

- Star-shaped profile
- Loading capacity up to 30 kg
- Lengths from 250 to 550 mm
- Quick plug-on assembly of the drawer
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- With soft-close

Drillings and cut-outs

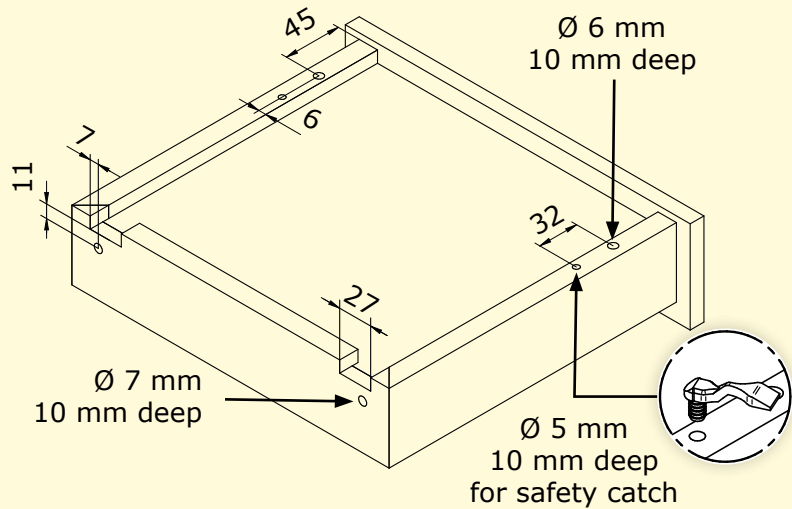


Drillings in the cabinet

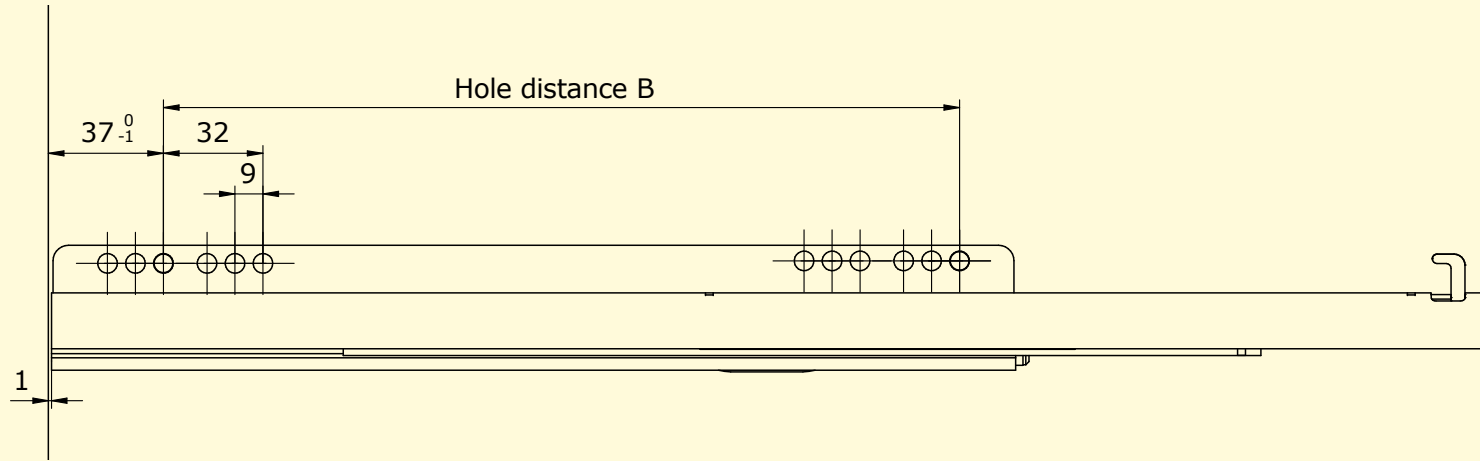


| Drawer length<br>in mm | Cabinet runner<br>in mm | Middle runner<br>in mm | Drawer runner<br>in mm | Soft-close | Runners/Box | Boxes/Pallet<br>maximum | Pieces/Pallet<br>maximum | Weight/Pallet<br>maximum | Order number<br>left side | Order number<br>right side |
|------------------------|-------------------------|------------------------|------------------------|------------|-------------|-------------------------|--------------------------|--------------------------|---------------------------|----------------------------|
| 250                    | 214                     | 214,3                  | 260                    | x          | 24          | 48                      | 1152                     | 654                      | 4112502001500             | 4122502001500              |
| 300                    | 246                     | 254,7                  | 310                    | x          | 24          | 50                      | 1200                     | 786                      | 4113002001500             | 4123002001500              |
| 350                    | 246                     | 254,7                  | 360                    | x          | 24          | 50                      | 1200                     | 816                      | 4113502001500             | 4123502001500              |
| 400                    | 278                     | 254,7                  | 410                    | x          | 24          | 35                      | 840                      | 630                      | 4114002001500             | 4124002001500              |
| 450                    | 310                     | 295,1                  | 460                    | x          | 24          | 35                      | 840                      | 704                      | 4114502001500             | 4124502001500              |
| 500                    | 310                     | 295,1                  | 510                    | x          | 24          | 30                      | 720                      | 624                      | 4115002001500             | 4125002001500              |
| 550                    | 342                     | 375,9                  | 560                    | x          | 24          | 30                      | 720                      | 747                      | 4115502001500             | 4125502001500              |

Installation Dimensions

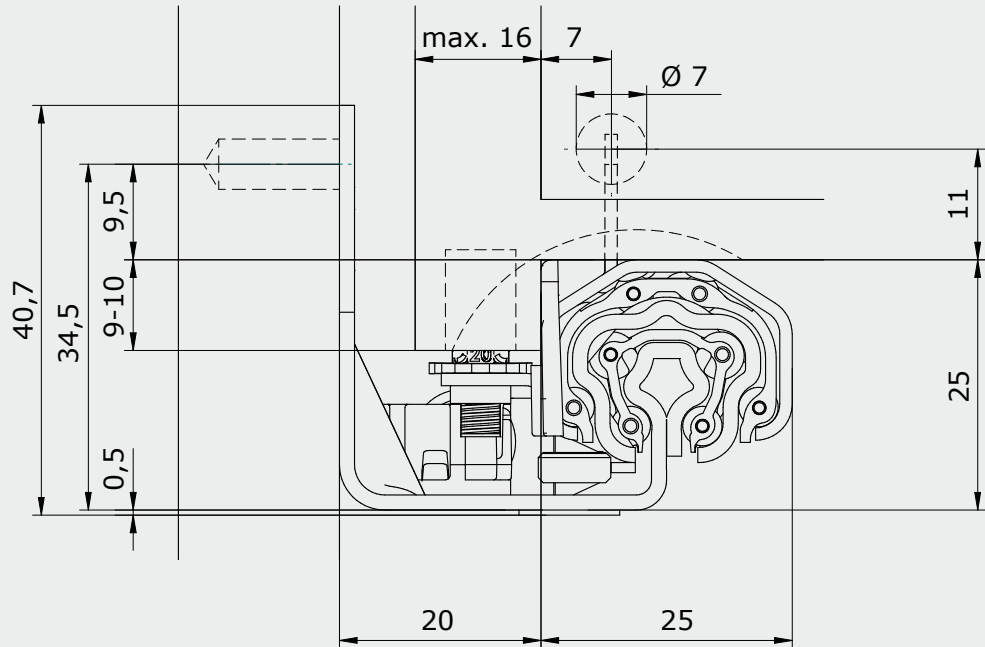


Length and hole pattern of the cabinet runner

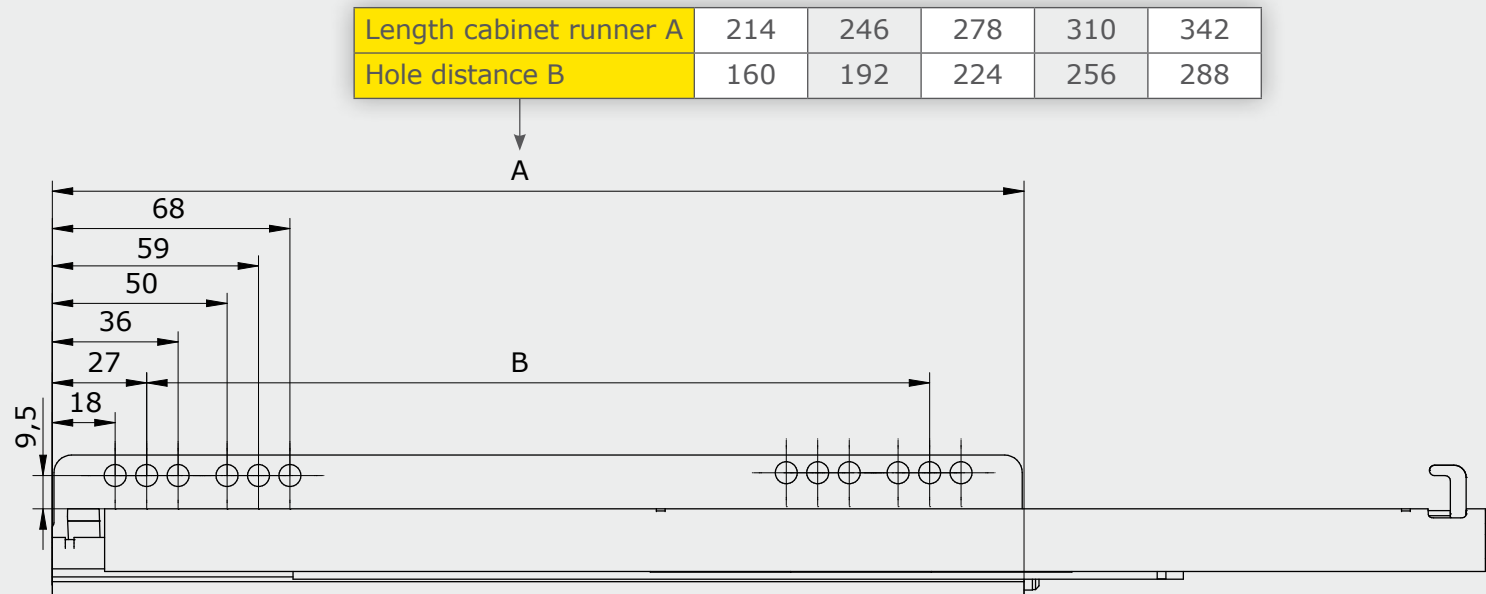


Features

- Star-shaped profile
- Loading capacity up to 30 kg
- Lengths from 250 to 550 mm
- Quick plug-on assembly of the drawer
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- With soft-close
- With pre-assembled safety catch

Drillings and cut-outs

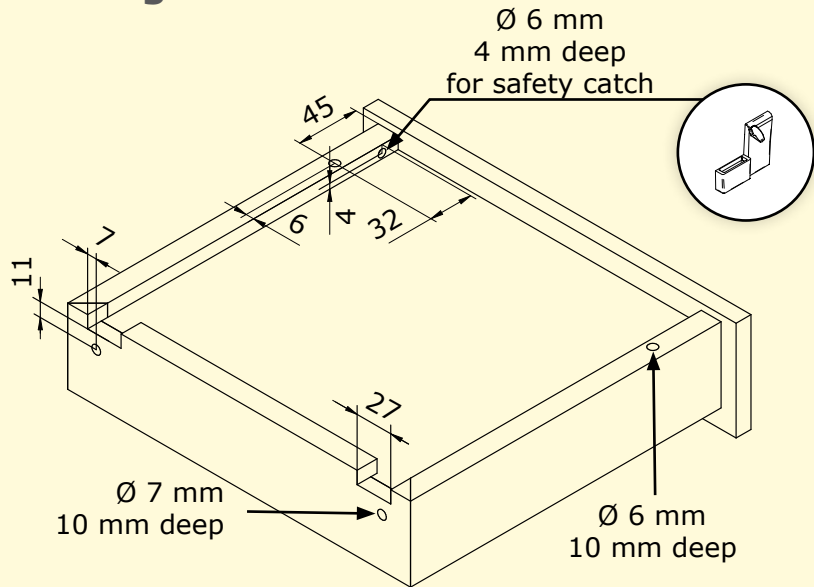


Drillings in the cabinet

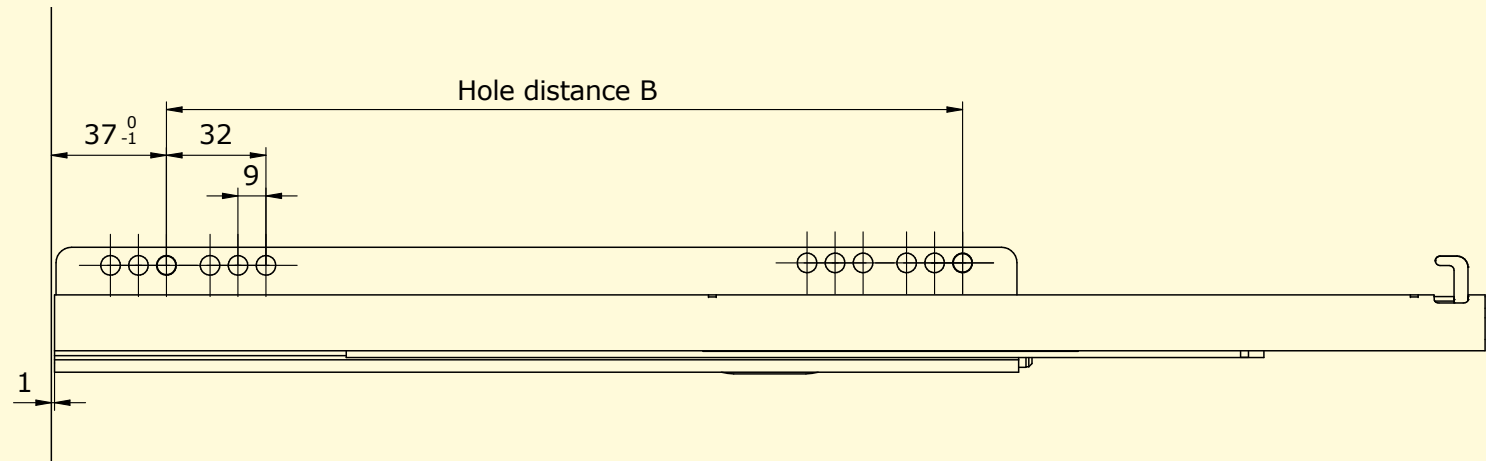


| Drawer length<br>in mm | Cabinet runner<br>in mm | Middle runner<br>in mm | Drawer runner<br>in mm | Soft-close | Runners/Box | Boxes/Pallet<br>maximum | Pieces/Pallet<br>maximum | Weight/Pallet<br>maximum | Order number<br>left side | Order number<br>right side |
|------------------------|-------------------------|------------------------|------------------------|------------|-------------|-------------------------|--------------------------|--------------------------|---------------------------|----------------------------|
| 250                    | 214                     | 214,3                  | 245                    | x          | 24          | 48                      | 1152                     | 643                      | 4112502001200             | 4122502001200              |
| 300                    | 246                     | 254,7                  | 295                    | x          | 24          | 50                      | 1200                     | 776                      | 4113002001200             | 4123002001200              |
| 350                    | 246                     | 254,7                  | 345                    | x          | 24          | 50                      | 1200                     | 806                      | 4113502001200             | 4123502001200              |
| 400                    | 278                     | 254,7                  | 395                    | x          | 24          | 35                      | 840                      | 625                      | 4114002001200             | 4124002001200              |
| 450                    | 310                     | 295,1                  | 445                    | x          | 24          | 35                      | 840                      | 697                      | 4114502001200             | 4124502001200              |
| 500                    | 310                     | 295,1                  | 495                    | x          | 24          | 30                      | 720                      | 619                      | 4115002001200             | 4125002001200              |
| 550                    | 342                     | 375,9                  | 545                    | x          | 24          | 30                      | 720                      | 699                      | 4115502001200             | 4125502001200              |

Installation Dimensions

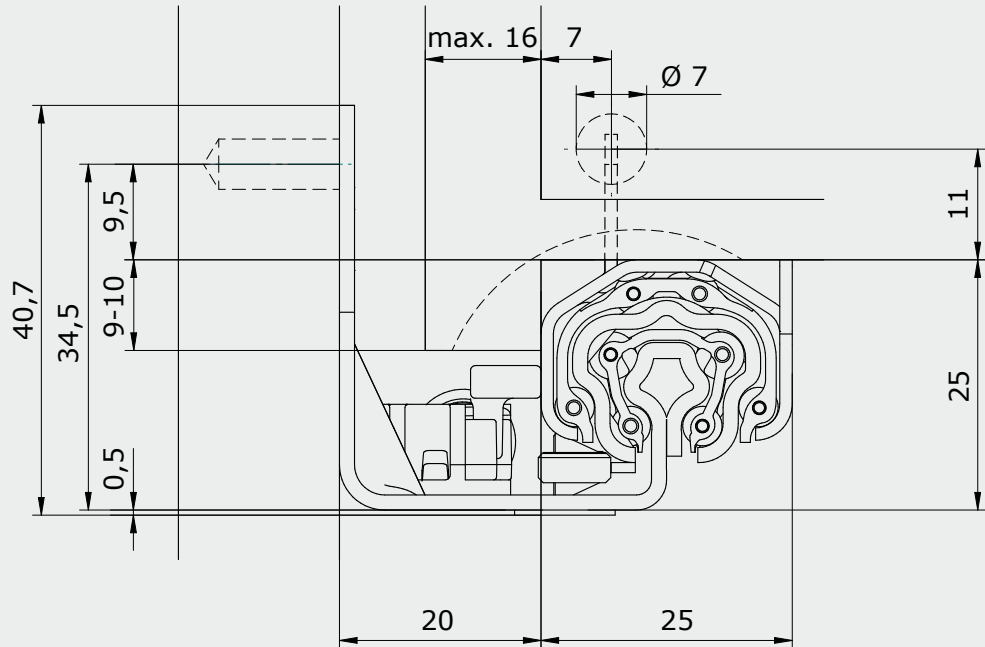

Length and hole pattern of the cabinet runner

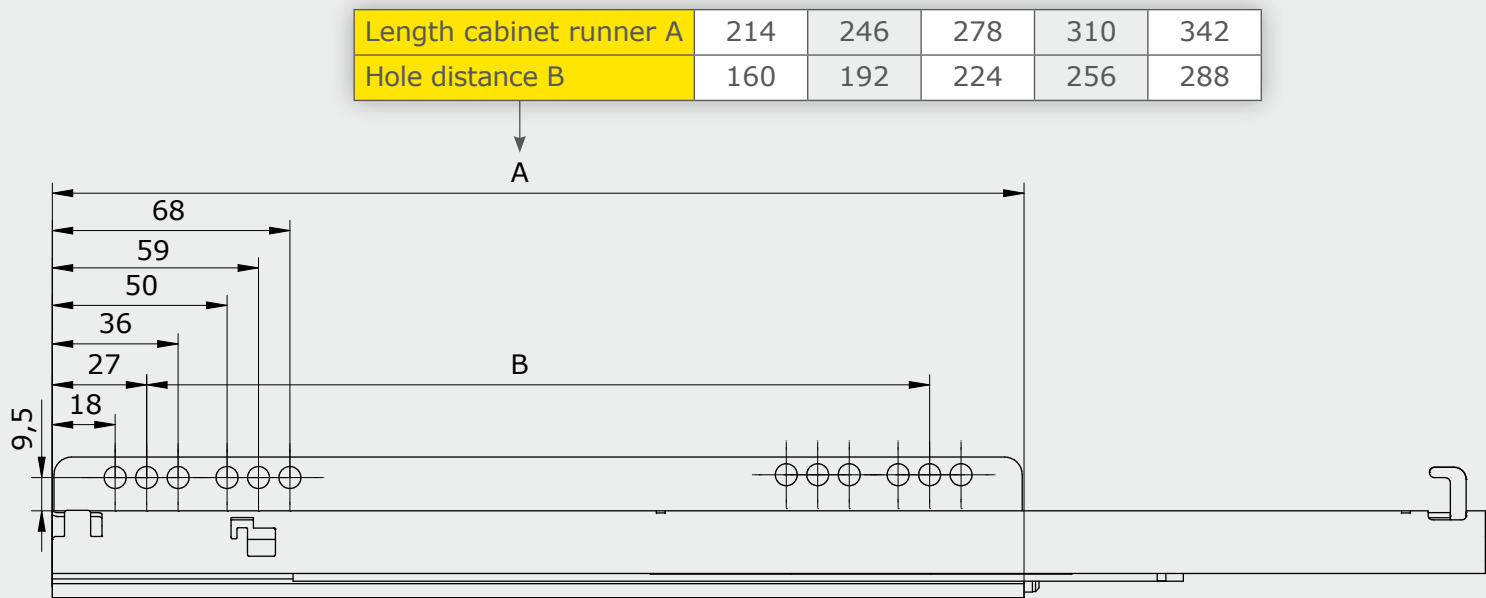


Features


- Star-shaped profile
- Loading capacity up to 30 kg
- Lengths from 250 to 550 mm
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- With soft-close
- Optionally with 1D or 2D coupling

Coupling technology

The types of couplings make the mounting and demounting of drawers quick and easy. All in one: safety catch, coupling and alignment. Available either as 1D (height adjustment), or 2D (height and side adjustment). A precise joint pattern can be achieved quickly, easily and without tools.

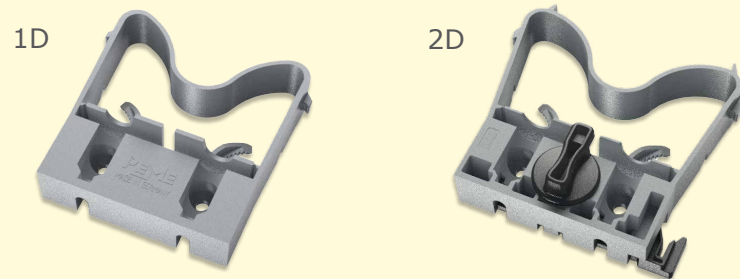

Drillings in the cabinet

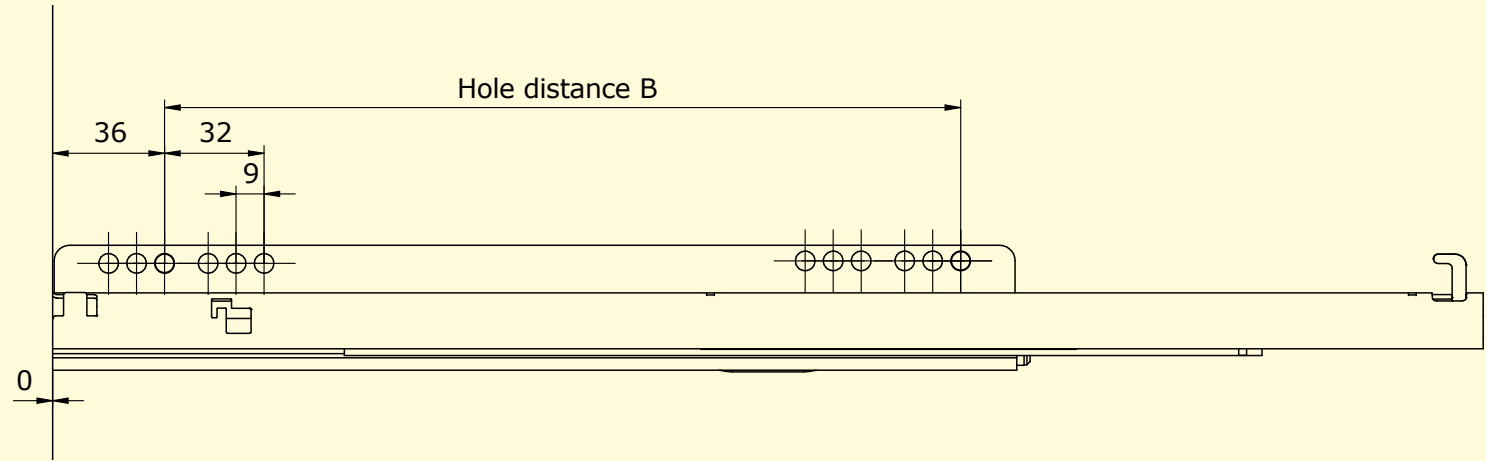


| Drawer length<br>in mm | Cabinet runner<br>in mm | Middle runner<br>in mm | Drawer runner<br>in mm | Soft-close | Runners/Box | Boxes/Pallet<br>maximum | Pieces/Pallet<br>maximum | Weight/Pallet<br>maximum | Order number<br>left side | Order number<br>right side |
|------------------------|-------------------------|------------------------|------------------------|------------|-------------|-------------------------|--------------------------|--------------------------|---------------------------|----------------------------|
| 250                    | 214                     | 214,3                  | 260                    | x          | 24          | 48                      | 1152                     | 637                      | 4112502001100             | 4122502001000              |
| 300                    | 246                     | 254,7                  | 310                    | x          | 24          | 50                      | 1200                     | 770                      | 4113002001100             | 4123002001000              |
| 350                    | 246                     | 254,7                  | 360                    | x          | 24          | 50                      | 1200                     | 800                      | 4113502001100             | 4123502001000              |
| 400                    | 278                     | 254,7                  | 410                    | x          | 24          | 35                      | 840                      | 620                      | 4114002001100             | 4124002001000              |
| 450                    | 310                     | 295,1                  | 460                    | x          | 24          | 35                      | 840                      | 694                      | 4114502001100             | 4124502001000              |
| 500                    | 310                     | 295,1                  | 510                    | x          | 24          | 30                      | 720                      | 615                      | 4115002001100             | 4125002001000              |
| 550                    | 342                     | 375,9                  | 560                    | x          | 24          | 30                      | 720                      | 696                      | 4115502001100             | 4125502001000              |

## Push-to-Open and plug-on assembly



**REME**

|                         |     |     |     |     |     |     |
|-------------------------|-----|-----|-----|-----|-----|-----|
| Length cabinet runner A | 214 | 246 | 278 | 310 | 342 | 406 |
| Hole distance B         | 160 | 192 | 224 | 256 | 288 | 320 |

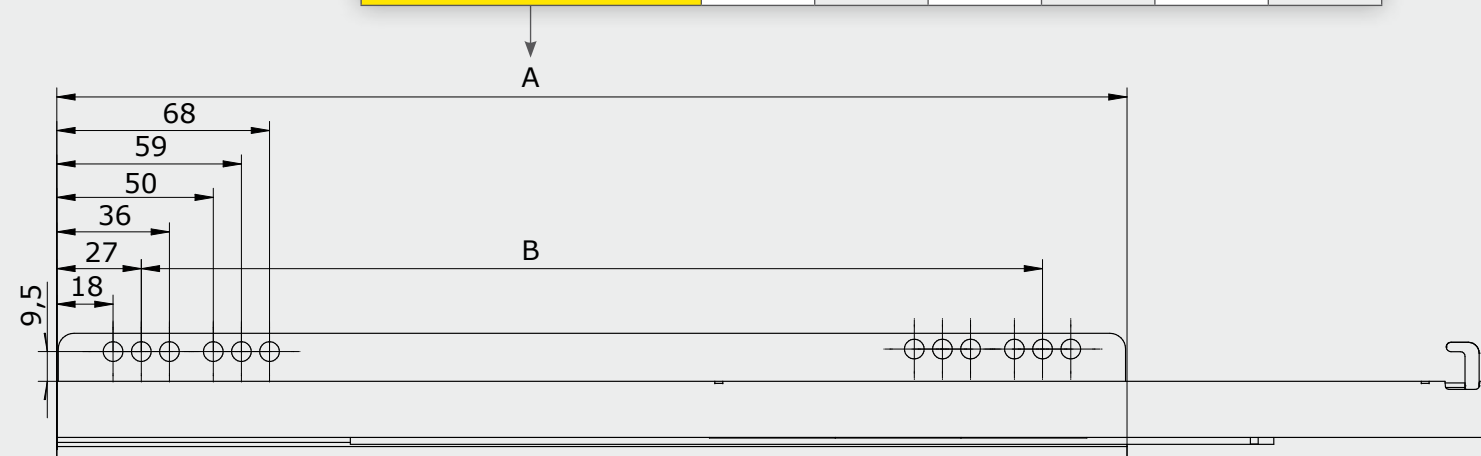

- Star-shaped profile
- Loading capacity up to 30 kg
- Lengths from 250 to 550 mm
- Quick plug-on assembly of the drawer
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- Trigger path/reveal gap = 3 mm
- With Push-to-Open

Technical drawing of a rectangular frame assembly. The drawing shows a perspective view of a rectangular frame with dimensions and callouts:

- Top edge: 45 mm
- Right edge: 6 mm
- Left edge: 11 mm
- Bottom edge: 27 mm
- Top-left corner: 7 mm
- Top-right corner: 32 mm
- Bottom-right corner: 27 mm
- Top edge: Ø 6 mm, 10 mm deep
- Bottom edge: Ø 7 mm, 10 mm deep
- Bottom-right corner: Ø 5 mm, 10 mm deep for safety catch

A circular inset shows a detail of the safety catch mechanism, which is a small metal component with a spring and a pin, used to secure the frame.

Technical drawing of a mechanical part, likely a bracket or plate, showing dimensions and hole locations. The drawing includes the following dimensions and features:

- Overall Width:** 37<sup>0</sup><sub>-1</sub>
- Hole Distance B:** Dimension across the top holes.
- Top Hole Spacing:** 32 (between the first and second hole groups) and 9 (between individual holes in the second group).
- Bottom Hole Spacing:** 1 (between the first and second hole groups).
- Holes:** Two groups of five holes each, located on the top and bottom surfaces.
- Mounting Features:** A vertical mounting flange on the left and a horizontal mounting flange on the bottom.


| Drawer length<br>in mm | Cabinet runner<br>in mm | Middle runner<br>in mm | Drawer runner<br>in mm | Push-to-Open | Runners/Box | Boxes/Pallet<br>maximum | Pieces/Pallet<br>maximum | Weight/Pallet<br>maximum | Order number<br>left side | Order number<br>right side |
|------------------------|-------------------------|------------------------|------------------------|--------------|-------------|-------------------------|--------------------------|--------------------------|---------------------------|----------------------------|
| 250                    | 214                     | 214,3                  | 260                    | x            | 24          | 48                      | 1152                     | 641                      | 4112503001500             | 4122503001500              |
| 300                    | 246                     | 254,7                  | 310                    | x            | 24          | 50                      | 1200                     | 774                      | 4113003001500             | 4123003001500              |
| 350                    | 278                     | 254,7                  | 360                    | x            | 24          | 50                      | 1200                     | 851                      | 4113503001500             | 4123503001500              |
| 400                    | 310                     | 254,7                  | 410                    | x            | 24          | 35                      | 840                      | 654                      | 4114003001500             | 4124003001500              |
| 450                    | 342                     | 295,1                  | 460                    | x            | 24          | 35                      | 840                      | 729                      | 4114503001500             | 4124503001500              |
| 500                    | 342                     | 295,1                  | 510                    | x            | 24          | 30                      | 720                      | 646                      | 4115003001500             | 4125003001500              |
| 550                    | 406                     | 375,9                  | 560                    | x            | 24          | 30                      | 720                      | 755                      | 4115503001500             | 4125503001500              |

## Push-to-Open and Coupling




**REME**

## Installation Dimensions

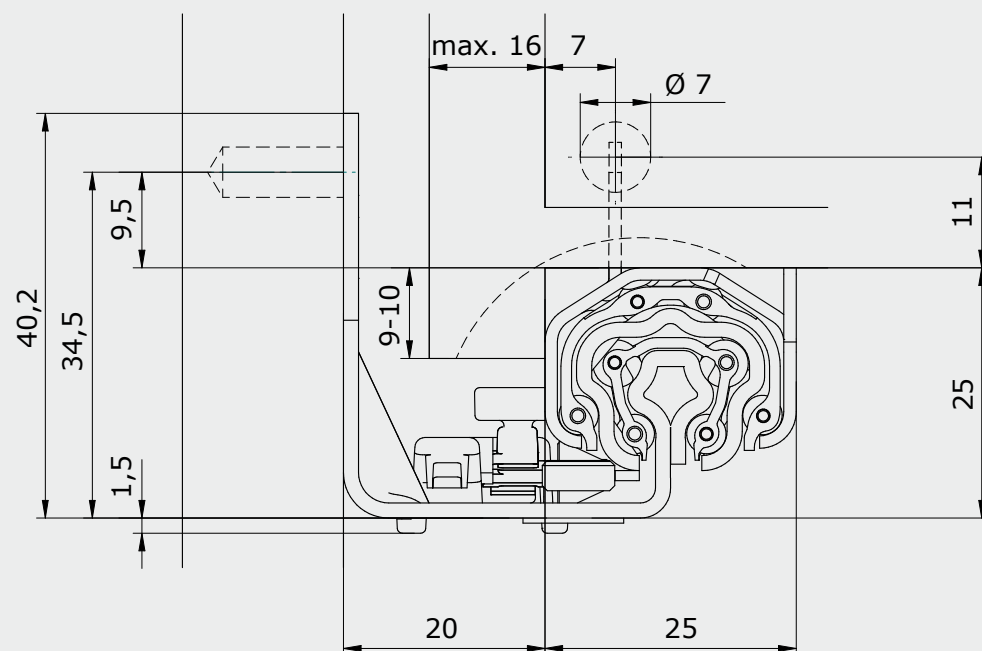

## Length and hole pattern of the cabinet runner

|                         |     |     |     |     |     |     |
|-------------------------|-----|-----|-----|-----|-----|-----|
| Length cabinet runner A | 214 | 246 | 278 | 310 | 342 | 406 |
| Hole distance B         | 160 | 192 | 224 | 256 | 288 | 352 |

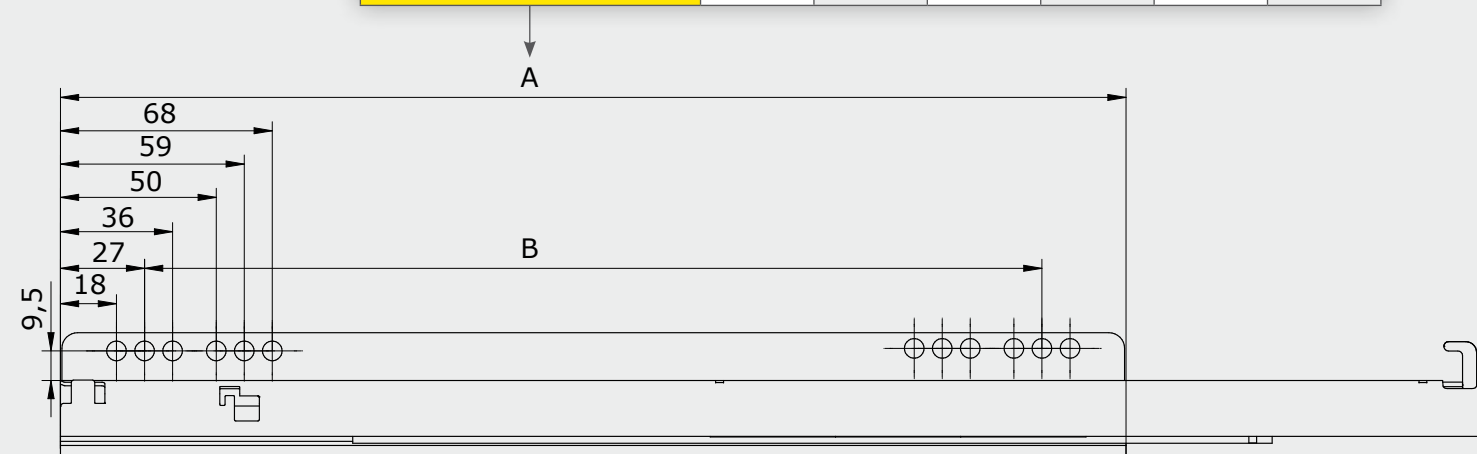


## Features


- Star-shaped profile
- Loading capacity up to 30 kg
- Lengths from 250 to 550 mm
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- Trigger path/reveal gap = 3 mm
- With Push-to-Open
- Optionally with 1D or 2D coupling

## Coupling technology

The types of couplings make the mounting and demounting of drawers quick and easy. All in one: safety catch, coupling and alignment. Available either as 1D (height adjustment), or 2D (height and side adjustment). A precise joint pattern can be achieved quickly, easily and without tools.

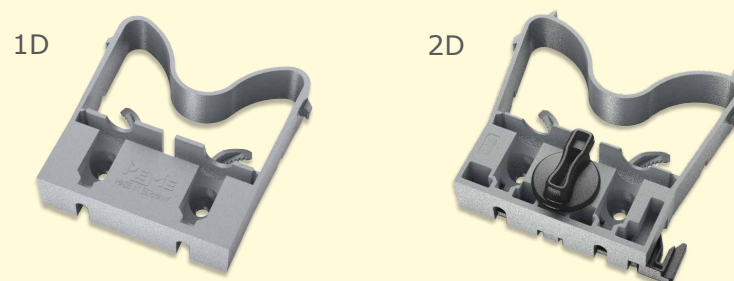


## Drillings in the cabinet

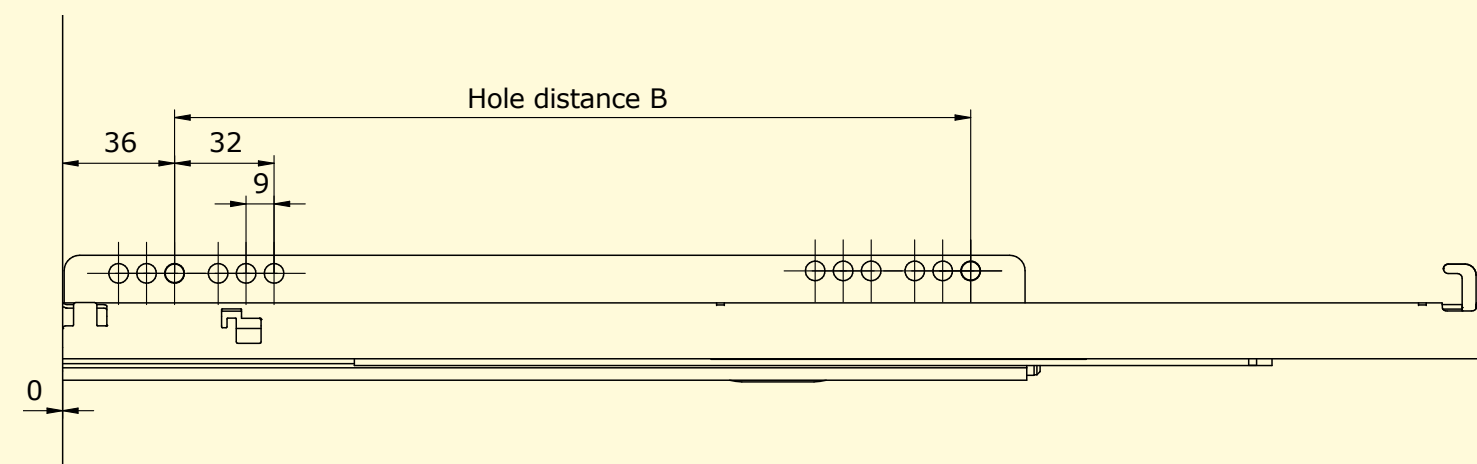


| Drawer length<br>in mm | Cabinet runner<br>in mm | Middle runner<br>in mm | Drawer runner<br>in mm | Soft-close | Runners/Box | Boxes/Pallet<br>maximum | Pieces/Pallet<br>maximum | Weight/Pallet<br>maximum | Order number<br>left side | Order number<br>right side |
|------------------------|-------------------------|------------------------|------------------------|------------|-------------|-------------------------|--------------------------|--------------------------|---------------------------|----------------------------|
| 250                    | 214                     | 214,3                  | 260                    | x          | 24          | 48                      | 1152                     | 638                      | 4112503001100             | 4122503001000              |
| 300                    | 246                     | 254,7                  | 310                    | x          | 24          | 50                      | 1200                     | 770                      | 4113003001100             | 4123003001000              |
| 350                    | 278                     | 254,7                  | 360                    | x          | 24          | 50                      | 1200                     | 848                      | 4113503001100             | 4123503001000              |
| 400                    | 310                     | 254,7                  | 410                    | x          | 24          | 35                      | 840                      | 650                      | 4114003001100             | 4124003001000              |
| 450                    | 342                     | 295,1                  | 460                    | x          | 24          | 35                      | 840                      | 725                      | 4114503001100             | 4124503001000              |
| 500                    | 342                     | 295,1                  | 510                    | x          | 24          | 30                      | 720                      | 641                      | 4115003001100             | 4125003001000              |
| 550                    | 406                     | 375,9                  | 560                    | x          | 24          | 30                      | 720                      | 751                      | 4115503001100             | 4125503001000              |

Installation Dimensions

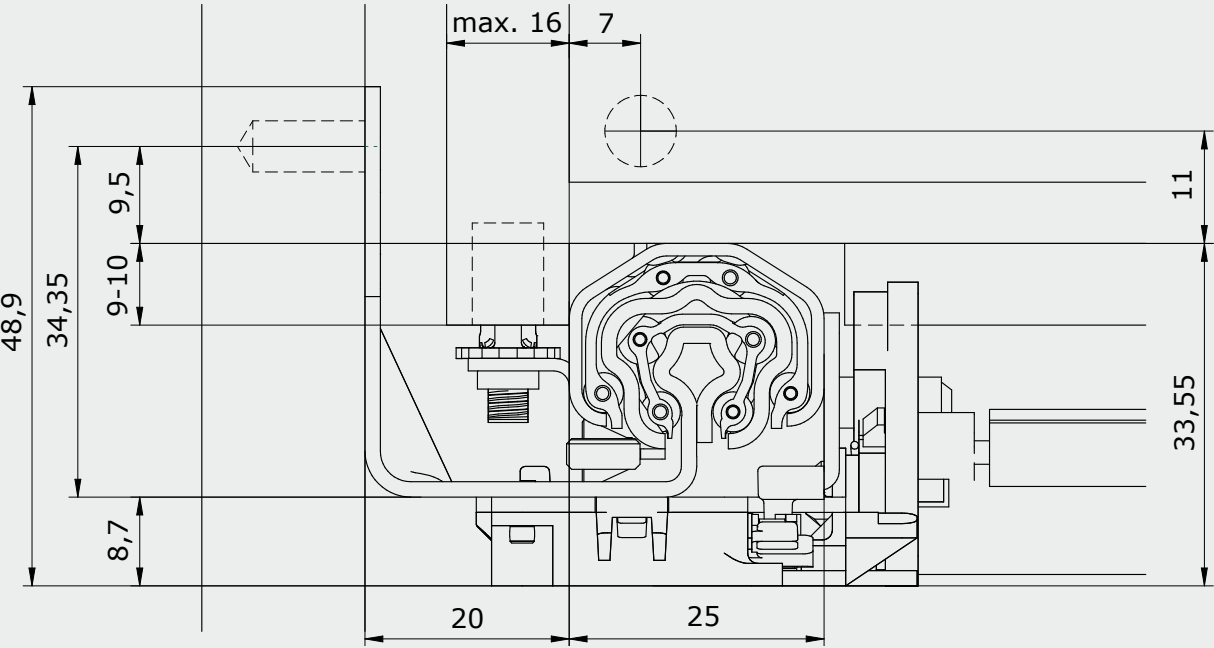


Length and hole pattern of the cabinet runner

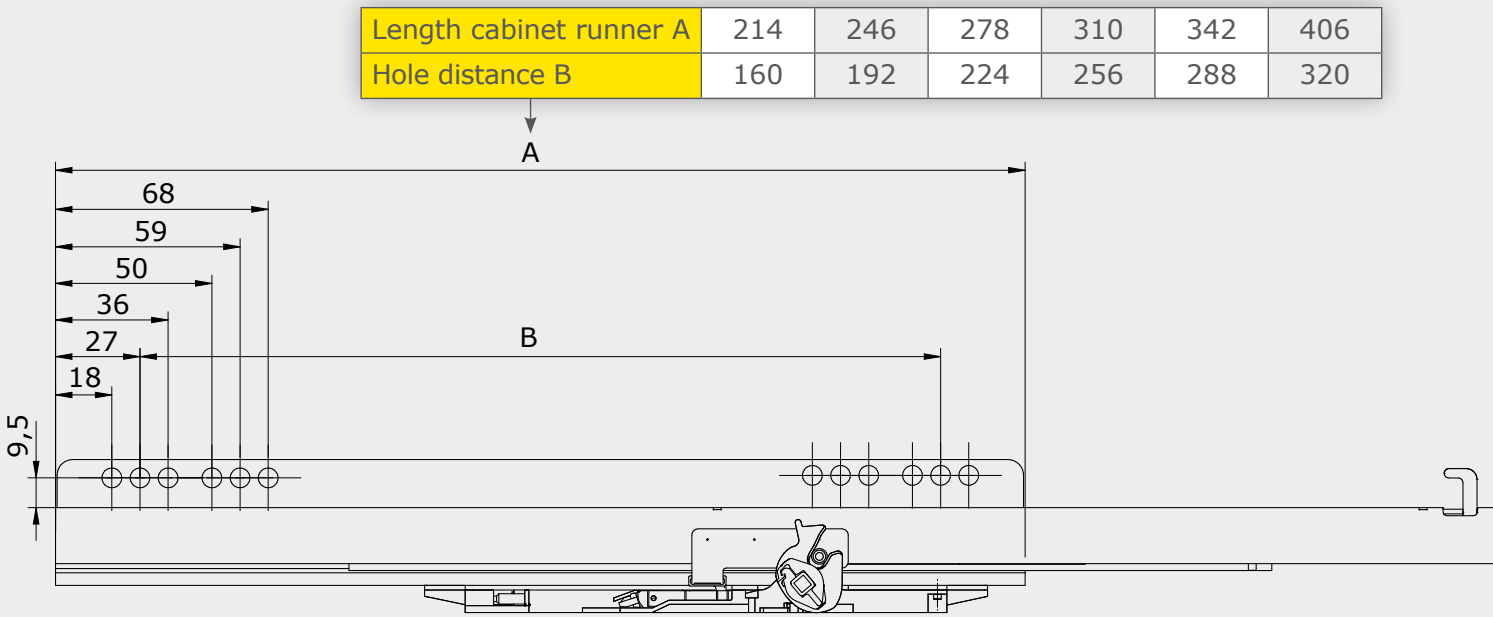


Features

- Star-shaped profile
- Loading capacity up to 30 kg
- Lengths from 250 to 550 mm
- Quick plug-on assembly of the drawer
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- Trigger path/reveal gap = 3 mm
- With Push-to-Open
- Greater sensitivity through synchronization

Drillings and cut-outs

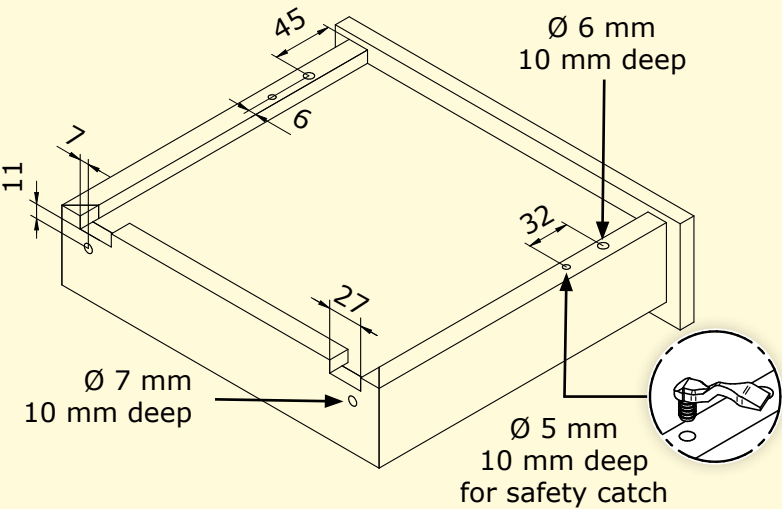


Drillings in the cabinet

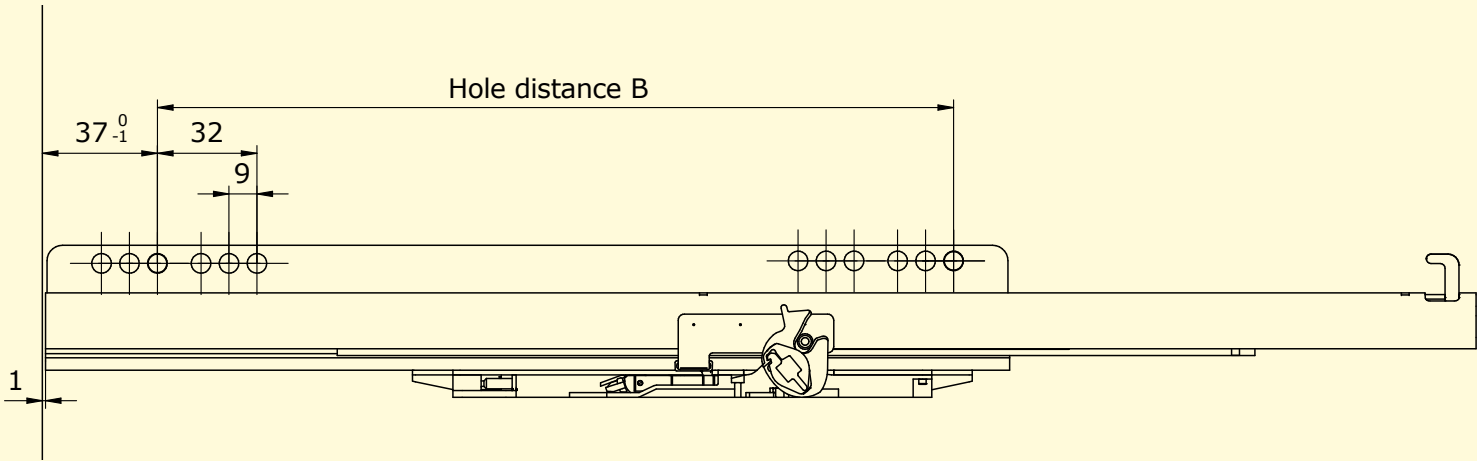


| Drawer length<br>in mm | Cabinet runner<br>in mm | Middle runner<br>in mm | Drawer runner<br>in mm | Push-to-Open<br>synchronization | Runners/Box | Boxes/Pallet<br>maximum | Pieces/Pallet<br>maximum | Weight/Pallet<br>maximum | Order number<br>left side | Order number<br>right side |
|------------------------|-------------------------|------------------------|------------------------|---------------------------------|-------------|-------------------------|--------------------------|--------------------------|---------------------------|----------------------------|
| 250                    | 214                     | 214,3                  | 260                    | x                               | 12          | 48                      | 567                      | 358                      | 4112503011500             | 4122503011500              |
| 300                    | 246                     | 254,7                  | 310                    | x                               | 12          | 50                      | 600                      | 425                      | 4113003011500             | 4123003011500              |
| 350                    | 246                     | 254,7                  | 360                    | x                               | 12          | 50                      | 600                      | 440                      | 4113503011500             | 4123503011500              |
| 400                    | 310                     | 254,7                  | 410                    | x                               | 12          | 35                      | 420                      | 343                      | 4114003011500             | 4124003011500              |
| 450                    | 342                     | 295,1                  | 460                    | x                               | 12          | 35                      | 420                      | 387                      | 4114503011500             | 4124503011500              |
| 500                    | 342                     | 295,1                  | 510                    | x                               | 12          | 30                      | 360                      | 338                      | 4115003011500             | 4125003011500              |
| 550                    | 406                     | 375,9                  | 560                    | x                               | 12          | 30                      | 360                      | 379                      | 4115503011500             | 4125503011500              |

Calculation synchronization linkage

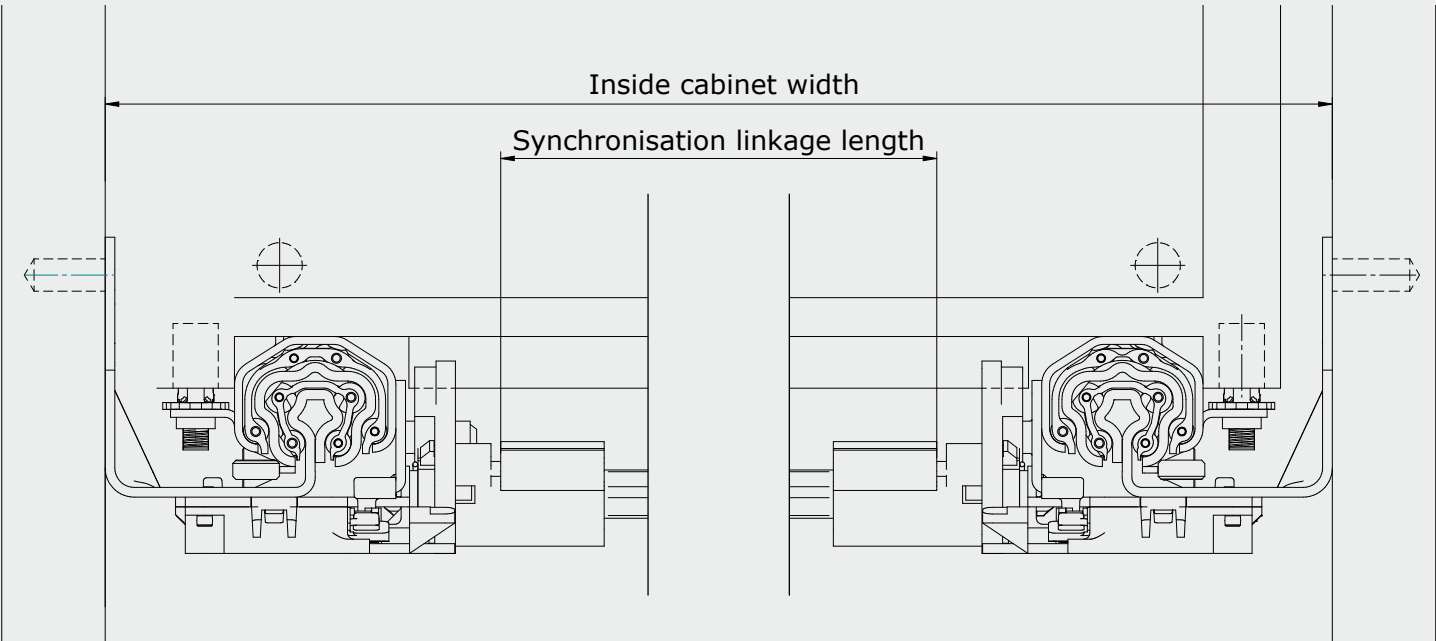

Example calculation

Synchronisation linkage length = Inside cabinet width - 102 mm

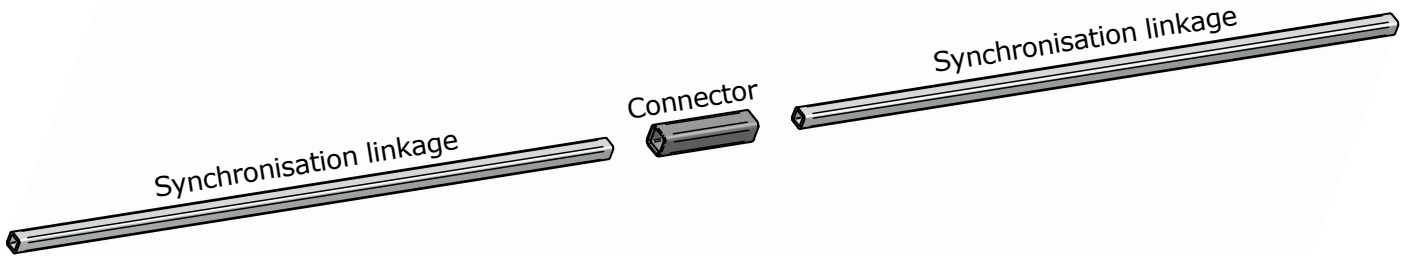

Article overview

|               |                         |                                        |
|---------------|-------------------------|----------------------------------------|
| Product:      | Synchronization linkage | Connector                              |
| Dimensions:   | 6x6 mm, 1100 mm long    | 9x9 mm, 40 mm long                     |
| Material:     | Aluminium               | Plastic                                |
| Info:         | For self-cutting        | For extending the synchronizer linkage |
| Order number: | 2060000000026           | 2060000000027                          |



## Full Extension EXTREME PEANUT®

Soft-close \_\_\_\_\_ Page 82

Push-to-Open \_\_\_\_\_ Page 86


### Product

EXTREME remains calm even under the highest demands. Its uniform geometry skilfully absorbs incorrect loads. The full-extension runner is characterised by its very smooth and precise running behaviour. The PEANUT® connection technology also enables the drawer runner to be fitted without tools. EXTREME PEANUT® therefore fulfils all the functional requirements of modern living - ideal for any wooden drawer. It is optionally available with soft-close and with push-to-open.

### PEANUT® connection technology


The PEANUT® is an invisible connector which allows the EXTREME slide to be mounted quickly and easily without tools. The PEANUT® is made of reinforced glass fibre nylon, which ensures a high clamping force when inserted into the cabinet wall. The PEANUT® head is specifically designed to maximise ease of assembly and joint strength. The EXTREME concealed slides can thus be installed quickly, easily and without tools.

Installation Dimensions

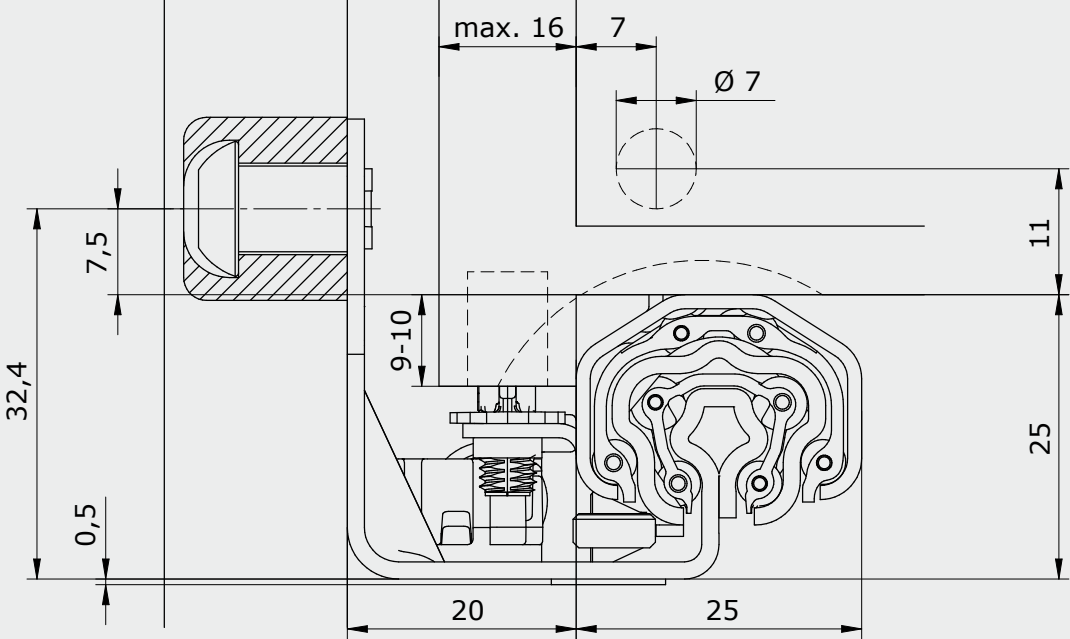

Length and hole pattern of the cabinet runner


|                         |     |     |     |     |     |
|-------------------------|-----|-----|-----|-----|-----|
| Length cabinet runner A | 214 | 246 | 278 | 310 | 342 |
| Peanut hole distance B  | 128 | 160 | 192 | 224 | 256 |

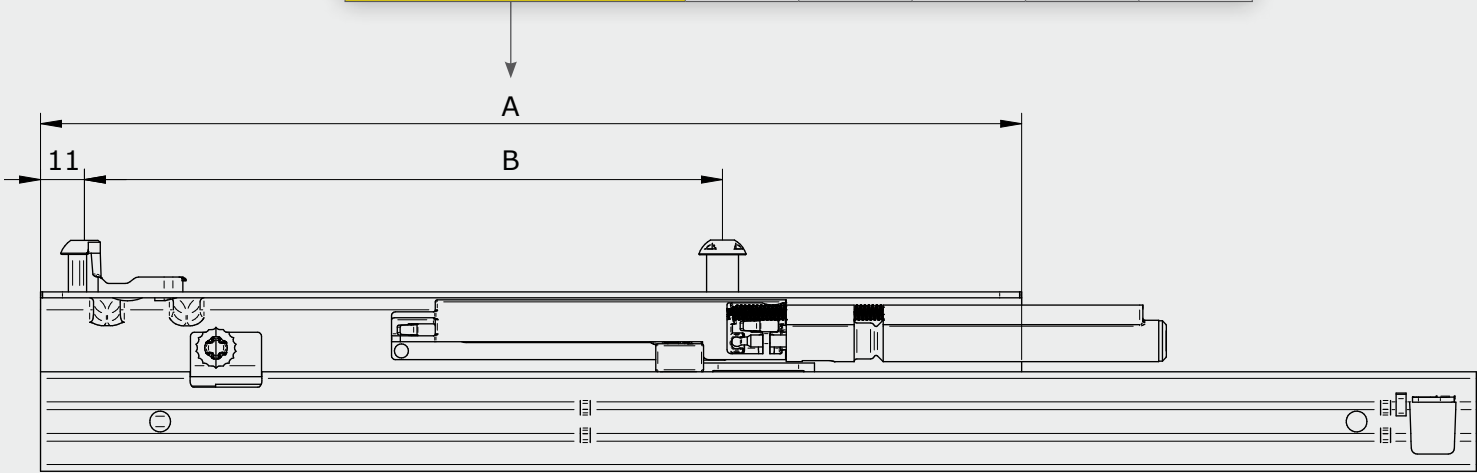


Features

- Star-shaped profile
- Loading capacity up to 25 kg
- Lengths from 250 to 550 mm
- Quick plug-on assembly of the drawer
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- With PEANUT® connecting fittings
- Quick and easy assembly
- With soft-close

Drillings and cut-outs

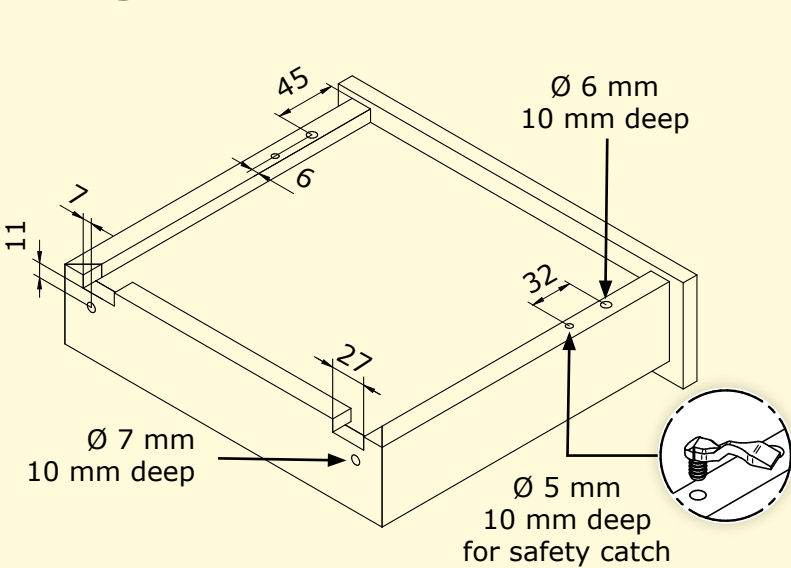


Milling in the cabinet

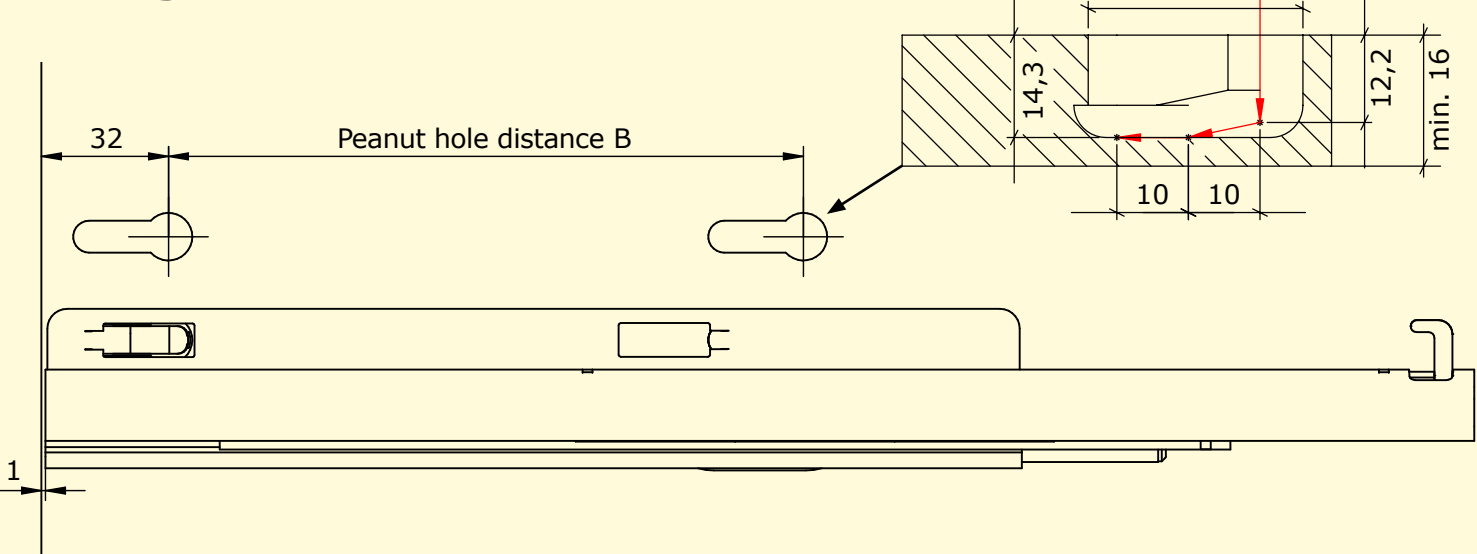

| Drawer length in mm | Cabinet runner in mm | Middle runner in mm | Drawer runner in mm | Soft-close | Runners/Box | Boxes/Pallet maximum | Pieces/Pallet maximum | Weight/Pallet maximum | Order number left side | Order number right side |
|---------------------|----------------------|---------------------|---------------------|------------|-------------|----------------------|-----------------------|-----------------------|------------------------|-------------------------|
| 250                 | 214                  | 214,3               | 260                 | x          | 21          | 48                   | 1008                  | 578                   | 4112502009000          | 4122502009000           |
| 300                 | 246                  | 254,7               | 310                 | x          | 21          | 50                   | 1050                  | 695                   | 4113002009000          | 4123002009000           |
| 350                 | 246                  | 254,7               | 360                 | x          | 21          | 50                   | 1050                  | 721                   | 4113502009000          | 4123502009000           |
| 400                 | 278                  | 254,7               | 410                 | x          | 21          | 35                   | 735                   | 558                   | 4114002009000          | 4124002009000           |
| 450                 | 310                  | 295,1               | 460                 | x          | 21          | 35                   | 735                   | 623                   | 4114502009000          | 4124502009000           |
| 500                 | 310                  | 295,1               | 510                 | x          | 21          | 30                   | 630                   | 552                   | 4115002009000          | 4125002009000           |
| 550                 | 342                  | 375,9               | 560                 | x          | 21          | 30                   | 630                   | 624                   | 4115502009000          | 4125502009000           |




Installation Dimensions

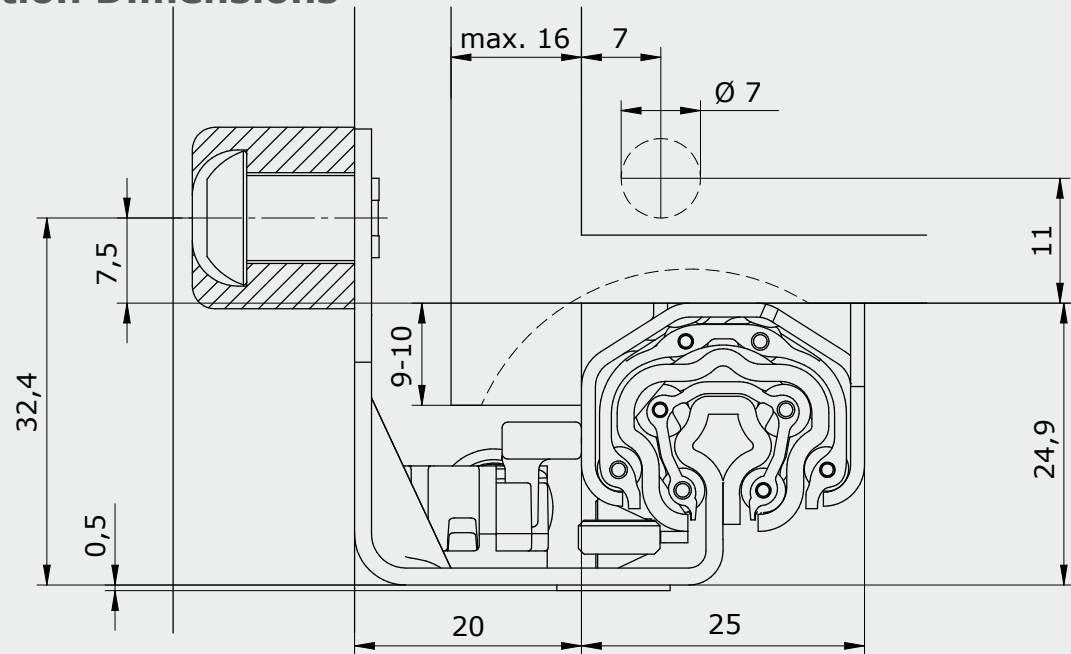

Length and hole pattern of the cabinet runner

|                         |     |     |     |     |     |
|-------------------------|-----|-----|-----|-----|-----|
| Length cabinet runner A | 214 | 246 | 278 | 310 | 342 |
| Peanut hole distance B  | 128 | 160 | 192 | 224 | 256 |

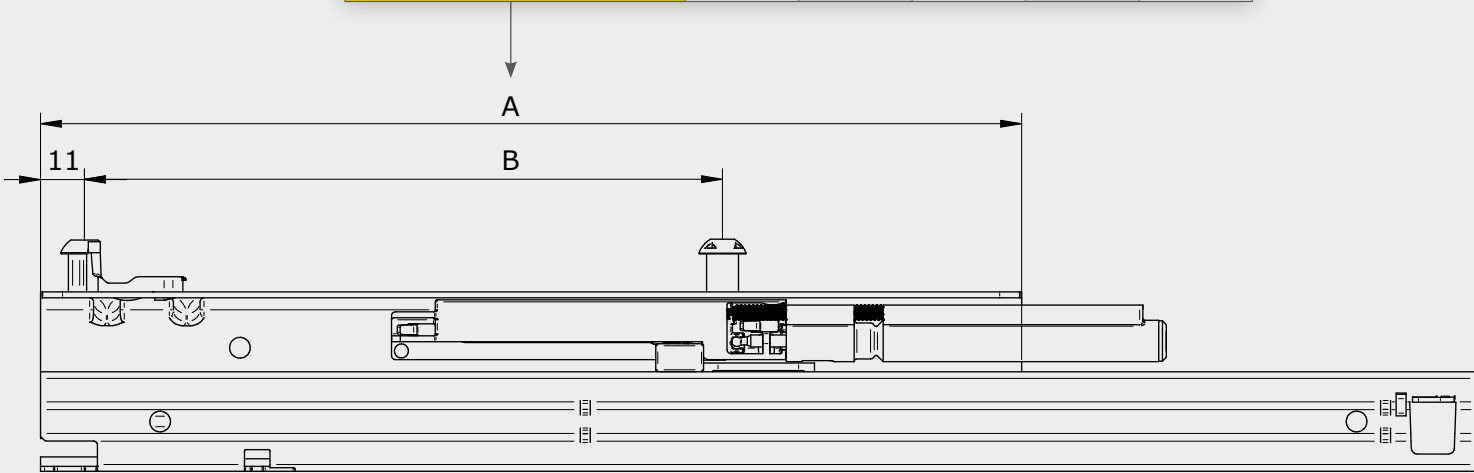


Features


- Star-shaped profile
- Loading capacity up to 25 kg
- Lengths from 250 to 550 mm
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- With PEANUT® connecting fittings
- Quick and easy assembly of the drawer
- With soft-close
- Optionally with 1D or 2D coupling

Coupling technology

The types of couplings make the mounting and demounting of drawers quick and easy. All in one: safety catch, coupling and alignment. Available either as 1D (height adjustment), or 2D (height and side adjustment). A precise joint pattern can be achieved quickly, easily and without tools.

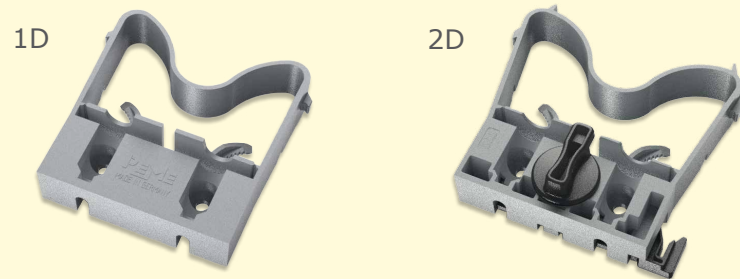


Milling in the cabinet

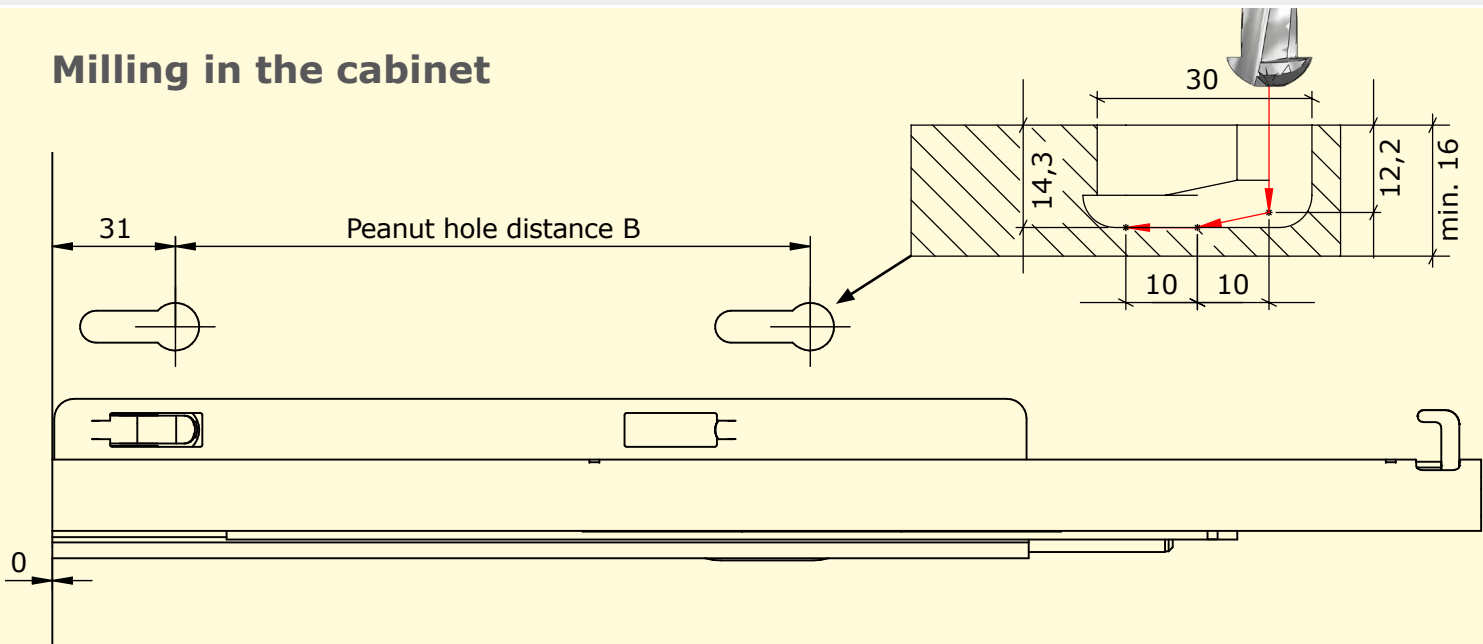


| Drawer length<br>in mm | Cabinet runner<br>in mm | Middle runner<br>in mm | Drawer runner<br>in mm | Soft-close | Runners/Box | Boxes/Pallet<br>maximum | Pieces/Pallet<br>maximum | Weight/Pallet<br>maximum | Order number<br>left side | Order number<br>right side |
|------------------------|-------------------------|------------------------|------------------------|------------|-------------|-------------------------|--------------------------|--------------------------|---------------------------|----------------------------|
| 250                    | 214                     | 214,3                  | 260                    | x          | 21          | 48                      | 1008                     | 569                      | 4112502009200             | 4122502009100              |
| 300                    | 246                     | 254,7                  | 310                    | x          | 21          | 50                      | 1050                     | 691                      | 4113002009200             | 4123002009100              |
| 350                    | 246                     | 254,7                  | 360                    | x          | 21          | 50                      | 1050                     | 717                      | 4113502009200             | 4123502009100              |
| 400                    | 278                     | 254,7                  | 410                    | x          | 21          | 35                      | 735                      | 555                      | 4114002009200             | 4124002009100              |
| 450                    | 310                     | 295,1                  | 460                    | x          | 21          | 35                      | 735                      | 620                      | 4114502009200             | 4124502009100              |
| 500                    | 310                     | 295,1                  | 510                    | x          | 21          | 30                      | 630                      | 550                      | 4115002009200             | 4125002009100              |
| 550                    | 342                     | 375,9                  | 560                    | x          | 21          | 30                      | 630                      | 622                      | 4115502009200             | 4125502009100              |

Installation Dimensions

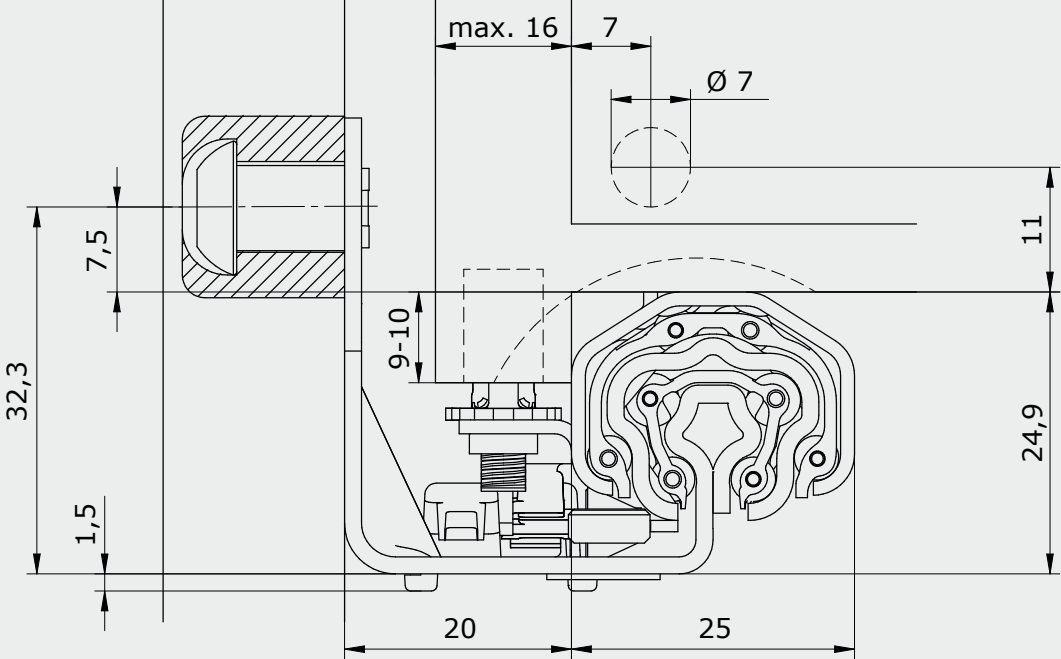

Length and hole pattern of the cabinet runner


|                         |     |     |     |     |     |     |
|-------------------------|-----|-----|-----|-----|-----|-----|
| Length cabinet runner A | 214 | 246 | 278 | 310 | 342 | 406 |
| Peanut hole distance B  | 128 | 160 | 192 | 224 | 256 | 288 |

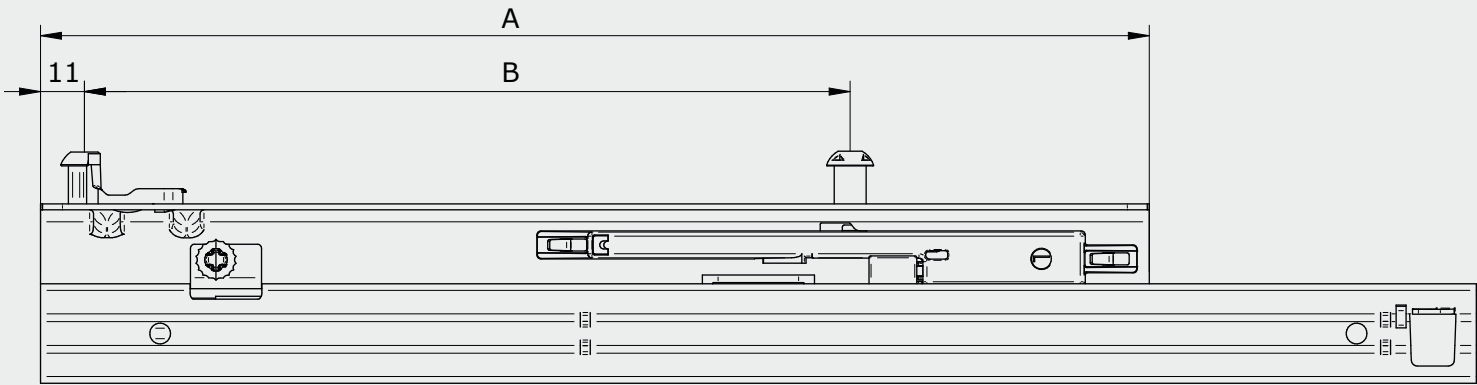


Features

- Star-shaped profile
- Loading capacity up to 25 kg
- Lengths from 250 to 550 mm
- Quick plug-on assembly of the drawer
- Stepless height adjustment
- High tracking stability with smooth running
- Perfect height and lateral stability
- With PEANUT® connecting fittings
- Quick and easy assembly
- Trigger path/reveal gap = 3 mm
- With Push-to-Open

Drillings and cut-outs

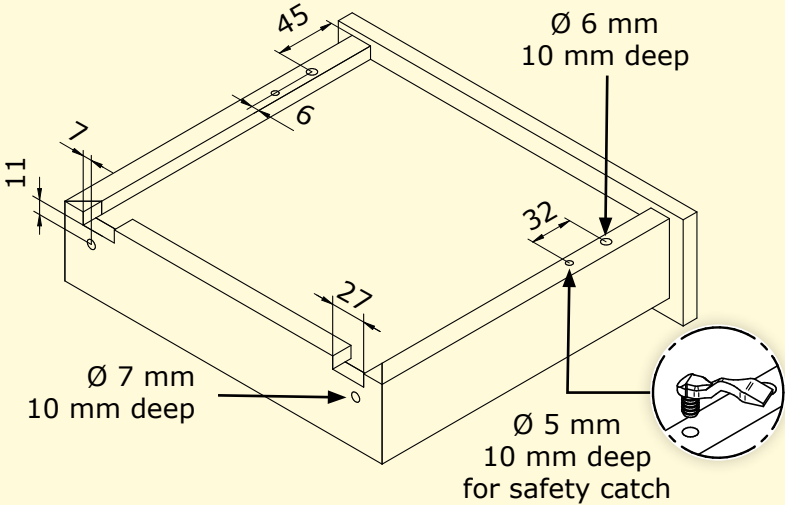

Milling in the cabinet

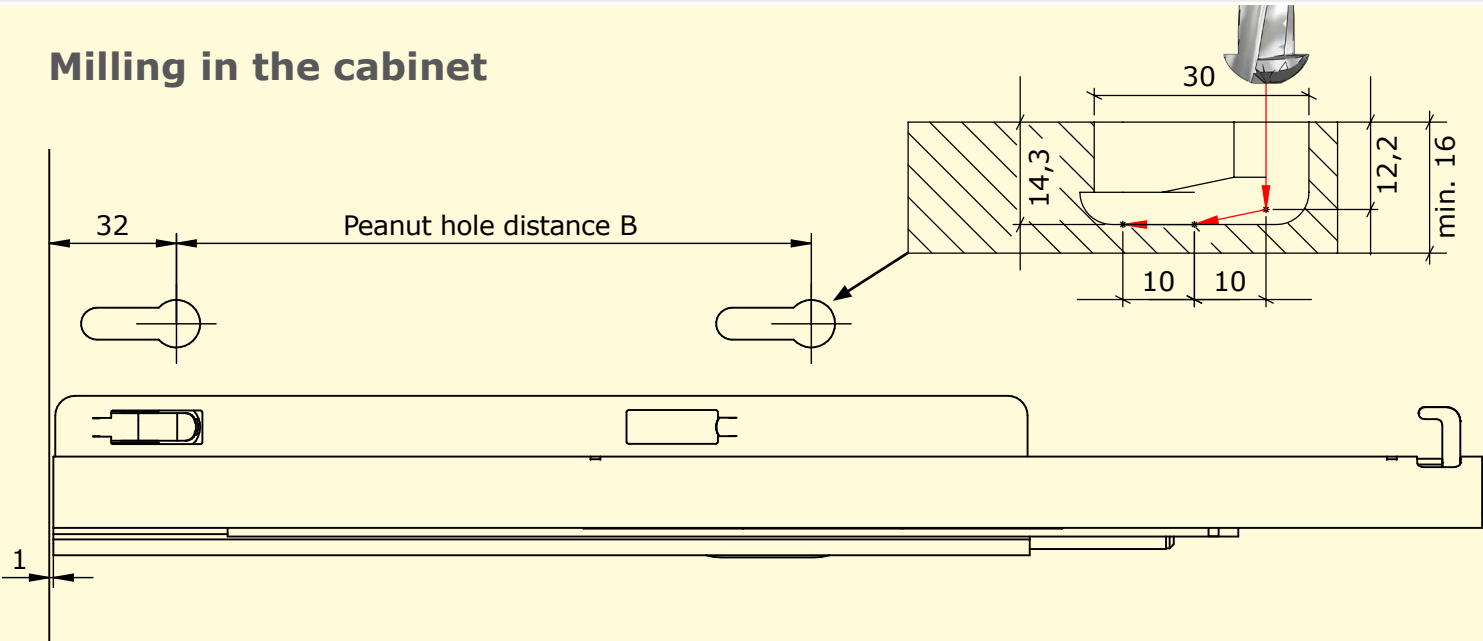

| Drawer length<br>in mm | Cabinet runner<br>in mm | Middle runner<br>in mm | Drawer runner<br>in mm | Push-to-Open | Runners/Box | Boxes/Pallet<br>maximum | Pieces/Pallet<br>maximum | Weight/Pallet<br>maximum | Order number<br>left side | Order number<br>right side |
|------------------------|-------------------------|------------------------|------------------------|--------------|-------------|-------------------------|--------------------------|--------------------------|---------------------------|----------------------------|
| 250                    | 214                     | 214,3                  | 260                    | x            | 21          | 48                      | 1008                     | 566                      | 4112503009000             | 4122503009000              |
| 300                    | 246                     | 254,7                  | 310                    | x            | 21          | 50                      | 1050                     | 683                      | 4113003009000             | 4123003009000              |
| 350                    | 278                     | 254,7                  | 360                    | x            | 21          | 50                      | 1050                     | 750                      | 4113503009000             | 4123503009000              |
| 400                    | 310                     | 254,7                  | 410                    | x            | 21          | 35                      | 735                      | 577                      | 4114003009000             | 4124003009000              |
| 450                    | 342                     | 295,1                  | 460                    | x            | 21          | 35                      | 735                      | 643                      | 4114503009000             | 4124503009000              |
| 500                    | 342                     | 295,1                  | 510                    | x            | 21          | 30                      | 630                      | 570                      | 4115003009000             | 4125003009000              |
| 550                    | 406                     | 375,9                  | 560                    | x            | 21          | 30                      | 630                      | 665                      | 4115503009000             | 4125503009000              |



Ball bearing runners


|             |             |
|-------------|-------------|
| 17mm groove | Page 90-93  |
| 27mm groove | Page 94-97  |
| 37mm groove | Page 98-101 |

Product

Precision slides with ball cage and self-closing mechanism for a 17, 27 and 37 mm drawer groove. Available as single and full extension slides with a maximum load of 10, 15 and 25 kg. Easy to assemble which allows minimal installation effort and thus offers some decisive advantages for customers and their end users.

Request and order

Do you have any questions about our products or would like to have a non-binding offer? Then simply contact us now.  
We'll be glad to help you!




# Ball bearing runners

## 17 mm groove




### Installation Dimensions

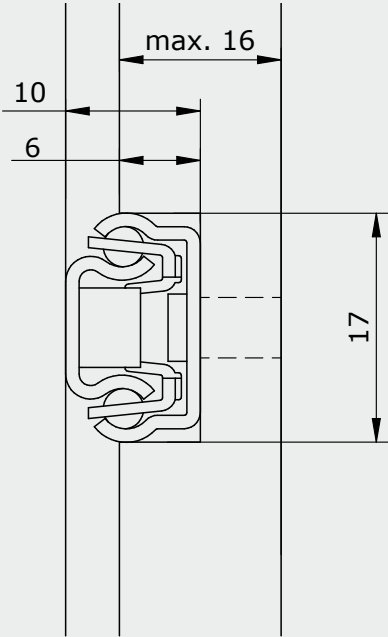

### Length and hole pattern of the cabinet runner


|                         |     |     |     |     |     |
|-------------------------|-----|-----|-----|-----|-----|
| Length cabinet runner A | 214 | 246 | 278 | 310 | 342 |
| Hole distance B         | 160 | 192 | 224 | 256 | 288 |

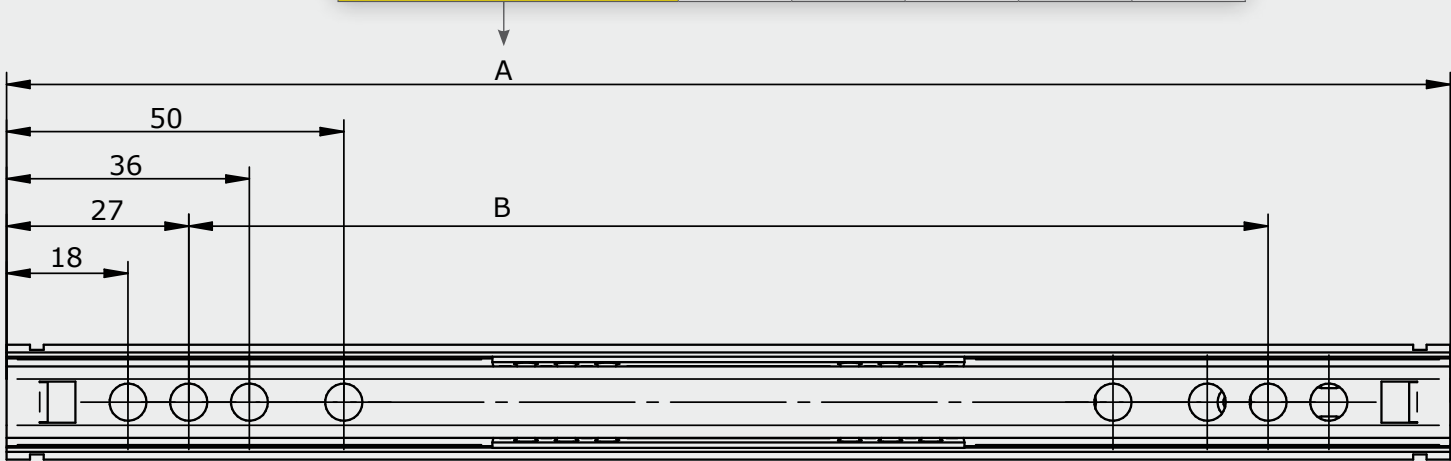

### Features

- Narrow installation widths
- Loading capacity up to 10 kg
- Material thickness 1,0 mm
- Good running characteristics
- Quick assembly
- Extremely versatile – for office, living or bedroom
- Customized production possible
- Depending on the quantity of the order we also supply the runners with bracktes of the customer´s choice.

### Drillings in the cabinet

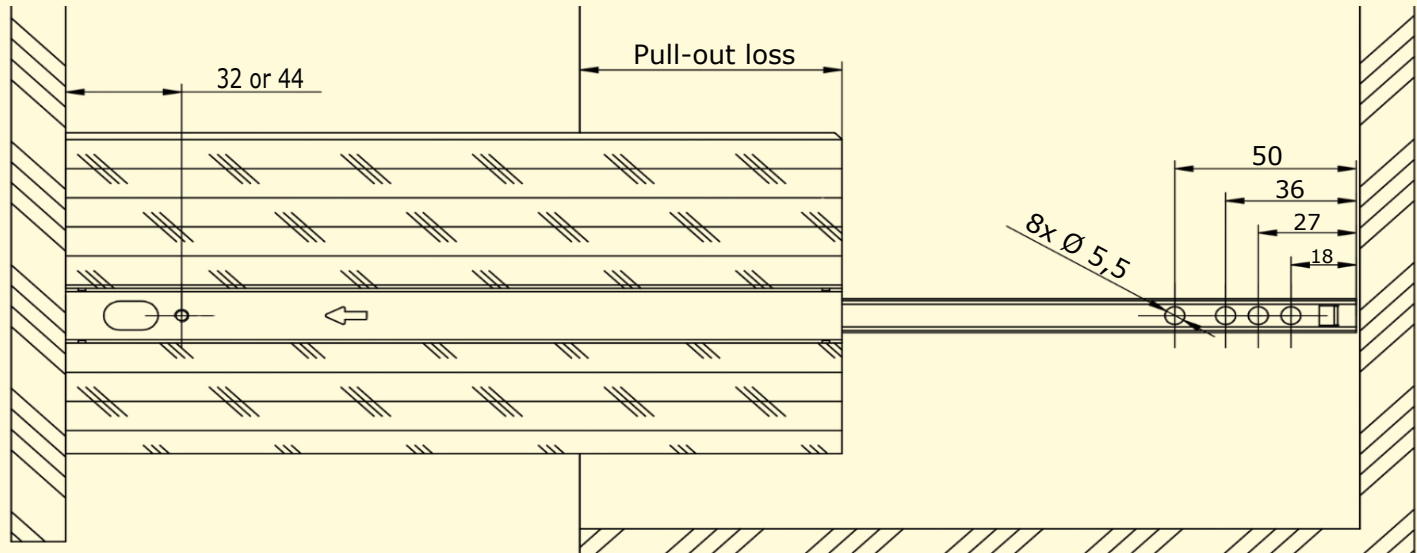


| Width | Cabinet runner in mm | Drawer runner in mm | Runners/ Box | Boxes/Pallet maximum | Pieces/Pallet maximum | Weight/Pallet maximum |
|-------|----------------------|---------------------|--------------|----------------------|-----------------------|-----------------------|
| 17    | 214                  | 214                 | 180          | 48                   | 8640                  | 672                   |
| 17    | 246                  | 246                 | 160          | 48                   | 7680                  | 744                   |
| 17    | 278                  | 278                 | 160          | 48                   | 7680                  | 821                   |
| 17    | 310                  | 310                 | 160          | 48                   | 7680                  | 912                   |
| 17    | 342                  | 342                 | 160          | 48                   | 4680                  | 1008                  |

# Ball bearing runners


17 mm groove




## Version

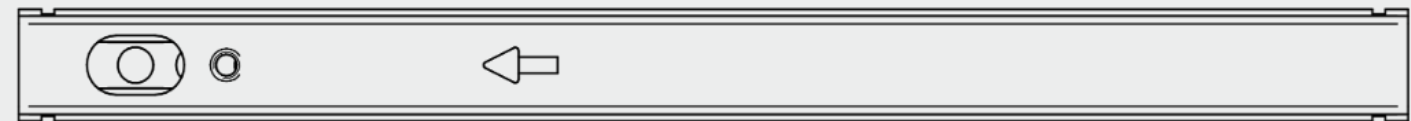


With thread M 4

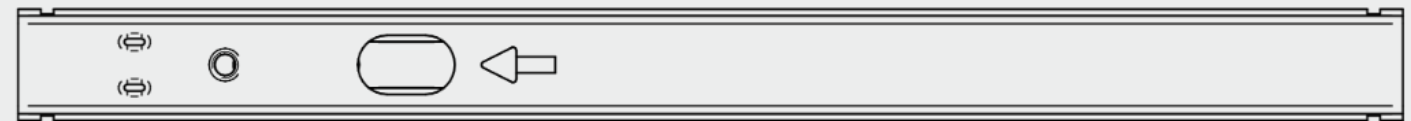


With thread M 4 and K-brake

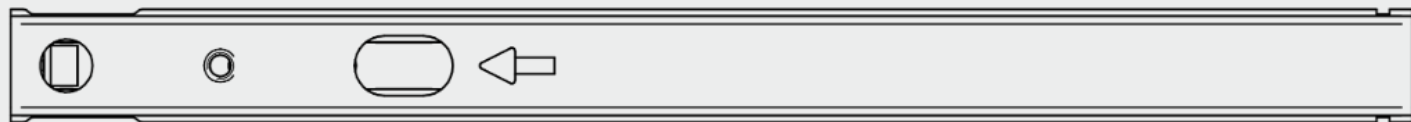

With thread M 4, front support and V-brake

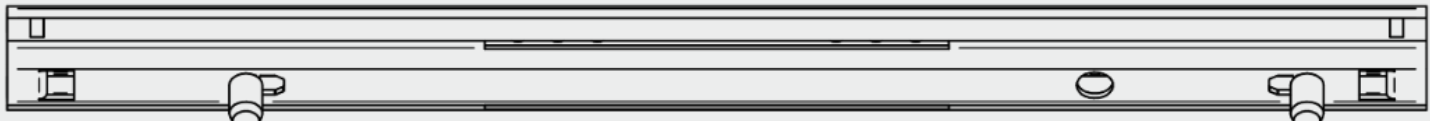

With thread M 4 and dowell

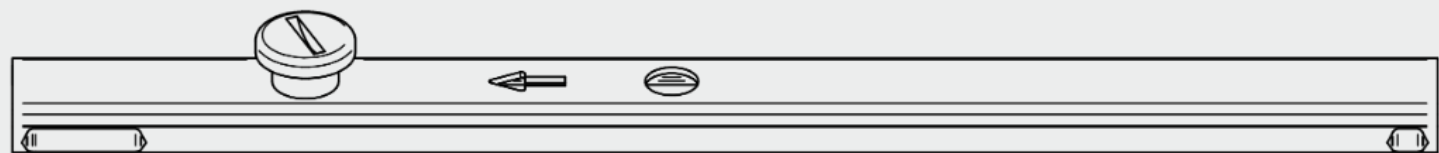


For quick assembly

# Ball bearing runners

## 27 mm groove



### Installation Dimensions

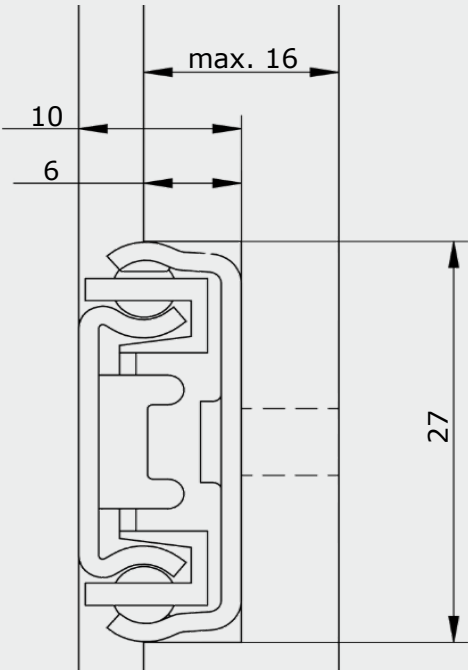

### Length and hole pattern of the cabinet runner


|                         |     |     |     |     |     |
|-------------------------|-----|-----|-----|-----|-----|
| Length cabinet runner A | 214 | 246 | 278 | 310 | 342 |
| Hole distance B         | 160 | 192 | 224 | 256 | 288 |



### Features

- Narrow installation widths
- Loading capacity up to 12 kg
- Material thickness 1,25 mm
- Good running characteristics
- Quick assembly
- Extremely versatile – for office, living or bedroom
- Customized production possible
- optional self-close

### Drillings in the cabinet

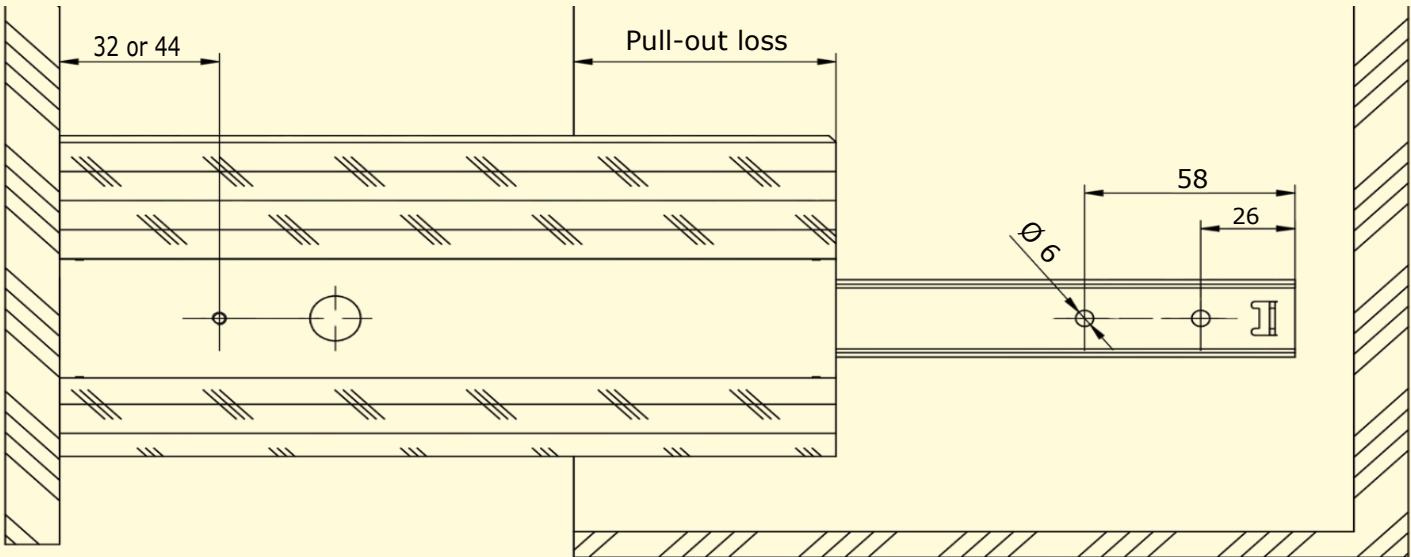


| Width | Cabinet runner in mm | Drawer runner in mm | Runners/ Box | Boxes/Pallet maximum | Pieces/Pallet maximum | Weight/Pallet maximum |
|-------|----------------------|---------------------|--------------|----------------------|-----------------------|-----------------------|
| 27    | 214                  | 214                 | 140          | 48                   | 6720                  | 912                   |
| 27    | 246                  | 246                 | 120          | 48                   | 5760                  | 903                   |
| 27    | 278                  | 278                 | 100          | 48                   | 4800                  | 874                   |
| 27    | 310                  | 310                 | 100          | 48                   | 4800                  | 951                   |
| 27    | 342                  | 342                 | 100          | 48                   | 4800                  | 1056                  |

# Ball bearing runners


27 mm groove




## Version

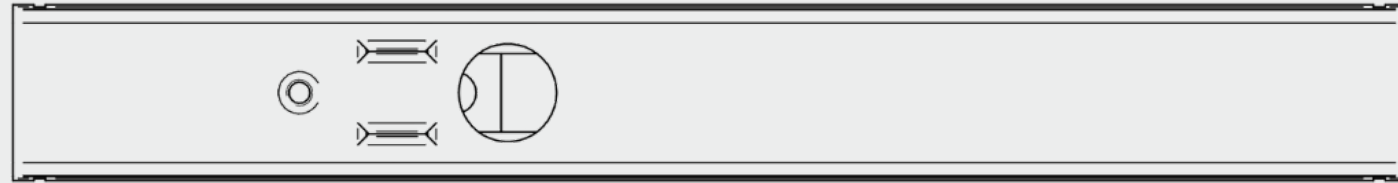


With thread M 4

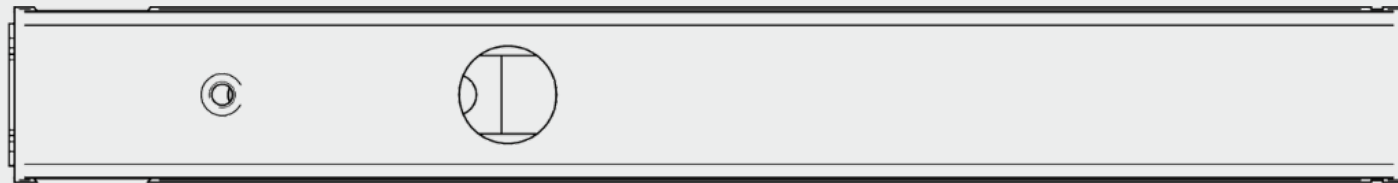

With thread M 4, front support and V-brake

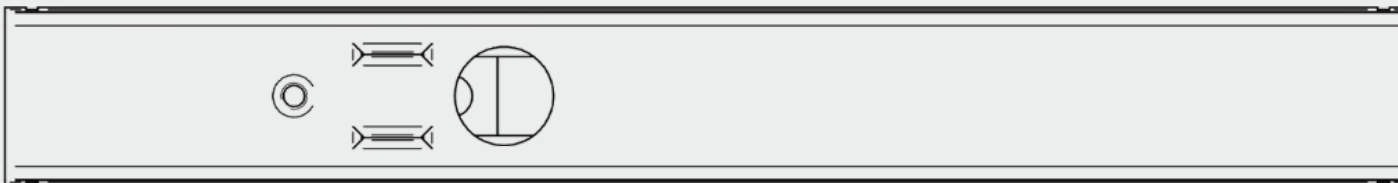


With thread M 4 and K-brake

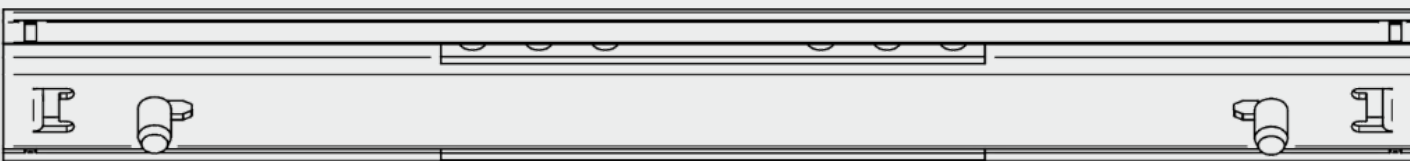


With thread M 4 and dowell




Possible with self-closing from the length 350 mm on

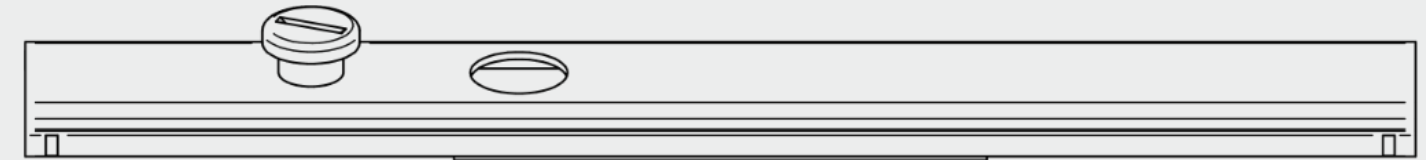


For quick assembly

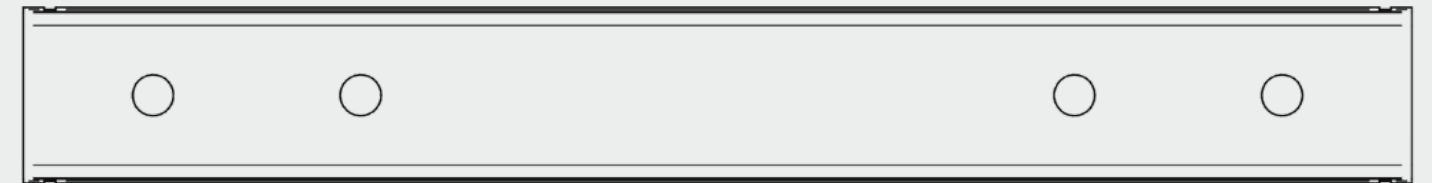

Two-sided with holes to screw-on

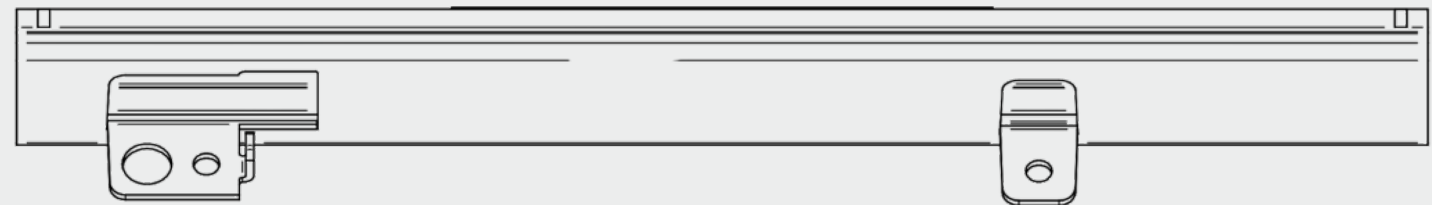

With plug-in assembly

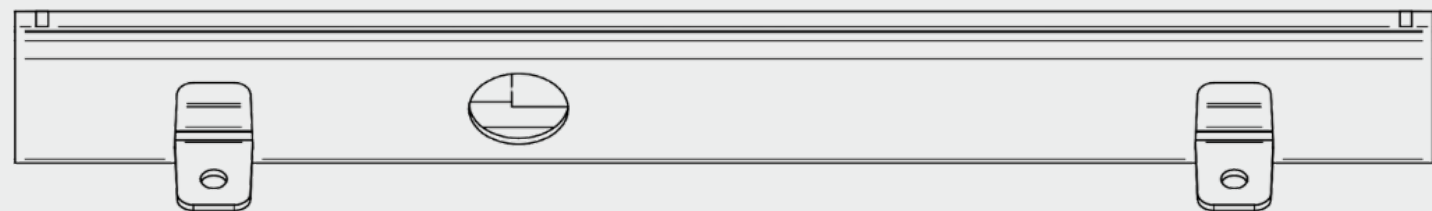


With punching for screwing

# Ball bearing runners

## 37 mm groove




### Installation Dimensions

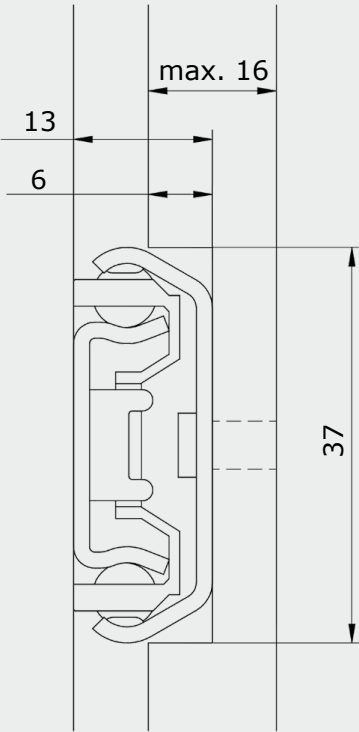

### Length and hole pattern of the cabinet runner


|                         |     |     |     |     |     |
|-------------------------|-----|-----|-----|-----|-----|
| Length cabinet runner A | 214 | 246 | 278 | 310 | 342 |
| Hole distance B         | 160 | 192 | 224 | 256 | 288 |

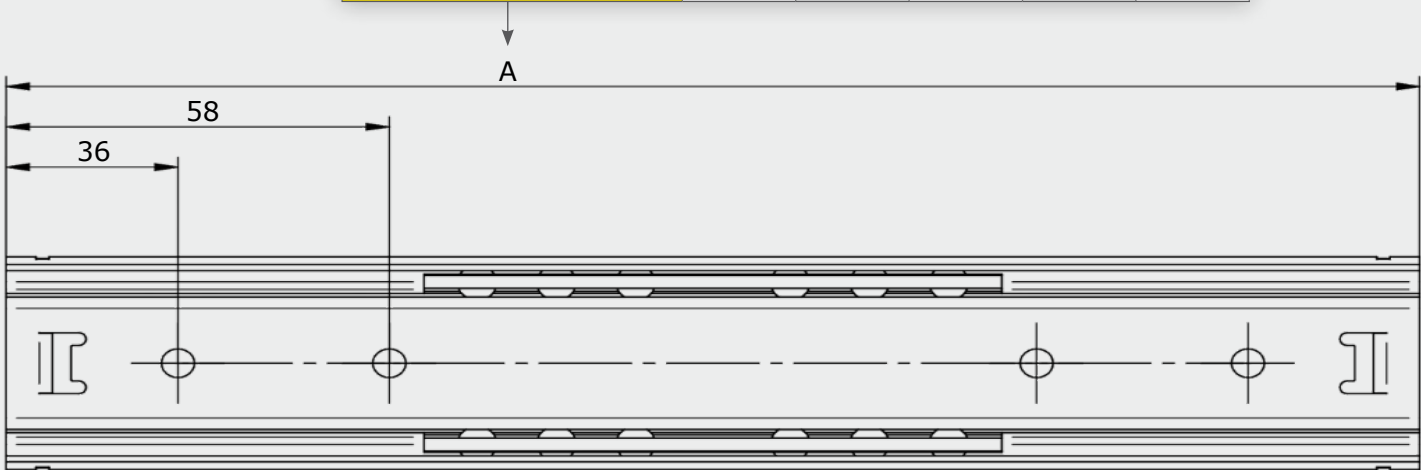

### Features

- Narrow installation widths
- Loading capacity up to 25 kg
- Material thickness 1,50 mm
- Good running characteristics
- Quick assembly
- Extremely versatile – for office, living or bedroom
- Customized production possible

### Drillings in the cabinet

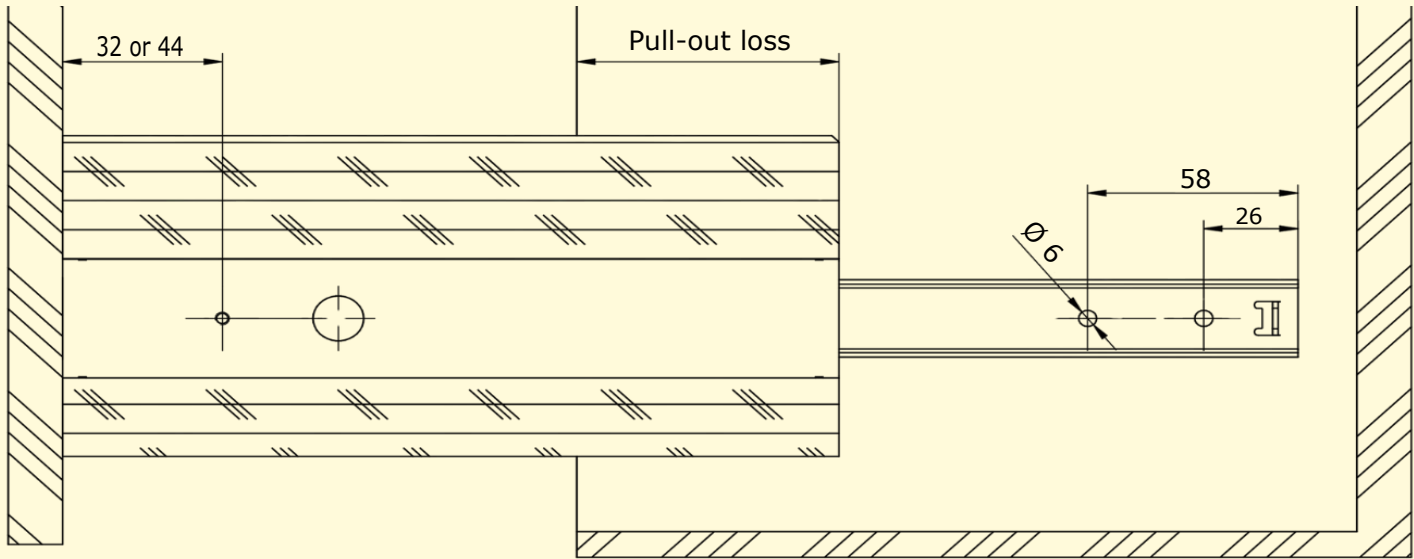


| Width | Cabinet runner in mm | Drawer runner in mm | Runners/ Box | Boxes/Pallet maximum | Pieces/Pallet maximum | Weight/Pallet maximum |
|-------|----------------------|---------------------|--------------|----------------------|-----------------------|-----------------------|
| 37    | 246                  | 246                 | 60           | 48                   | 2880                  | 782                   |
| 37    | 278                  | 278                 | 60           | 48                   | 2880                  | 874                   |
| 37    | 310                  | 310                 | 60           | 48                   | 2880                  | 965                   |
| 37    | 342                  | 342                 | 60           | 48                   | 2880                  | 1056                  |

# Ball bearing runners


37 mm groove




## Version

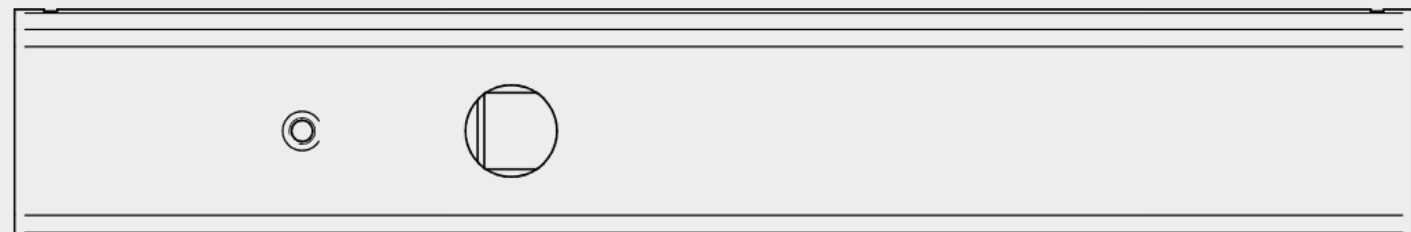


With thread M 4

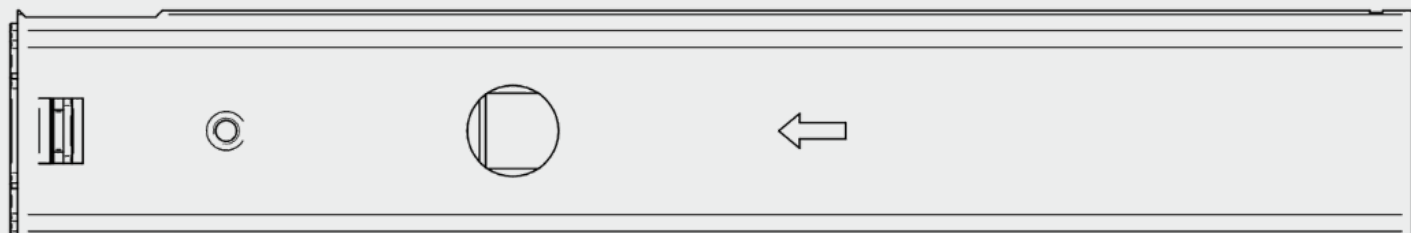

With thread M 4, front support and V-brake

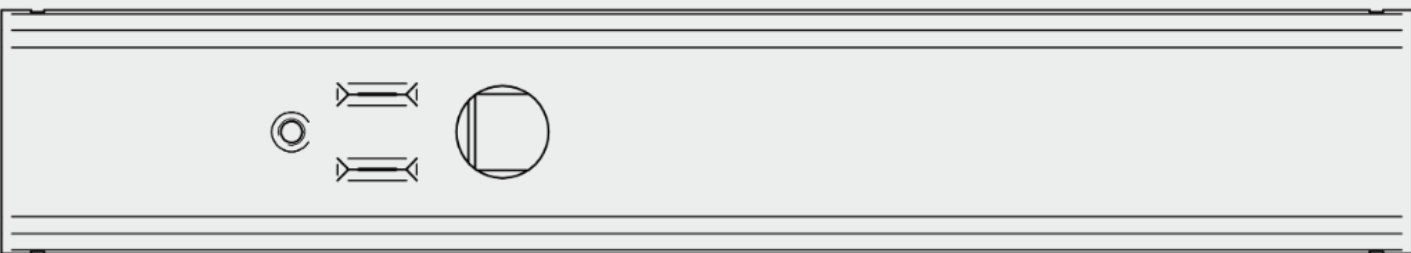

With thread M 4 and K-brake

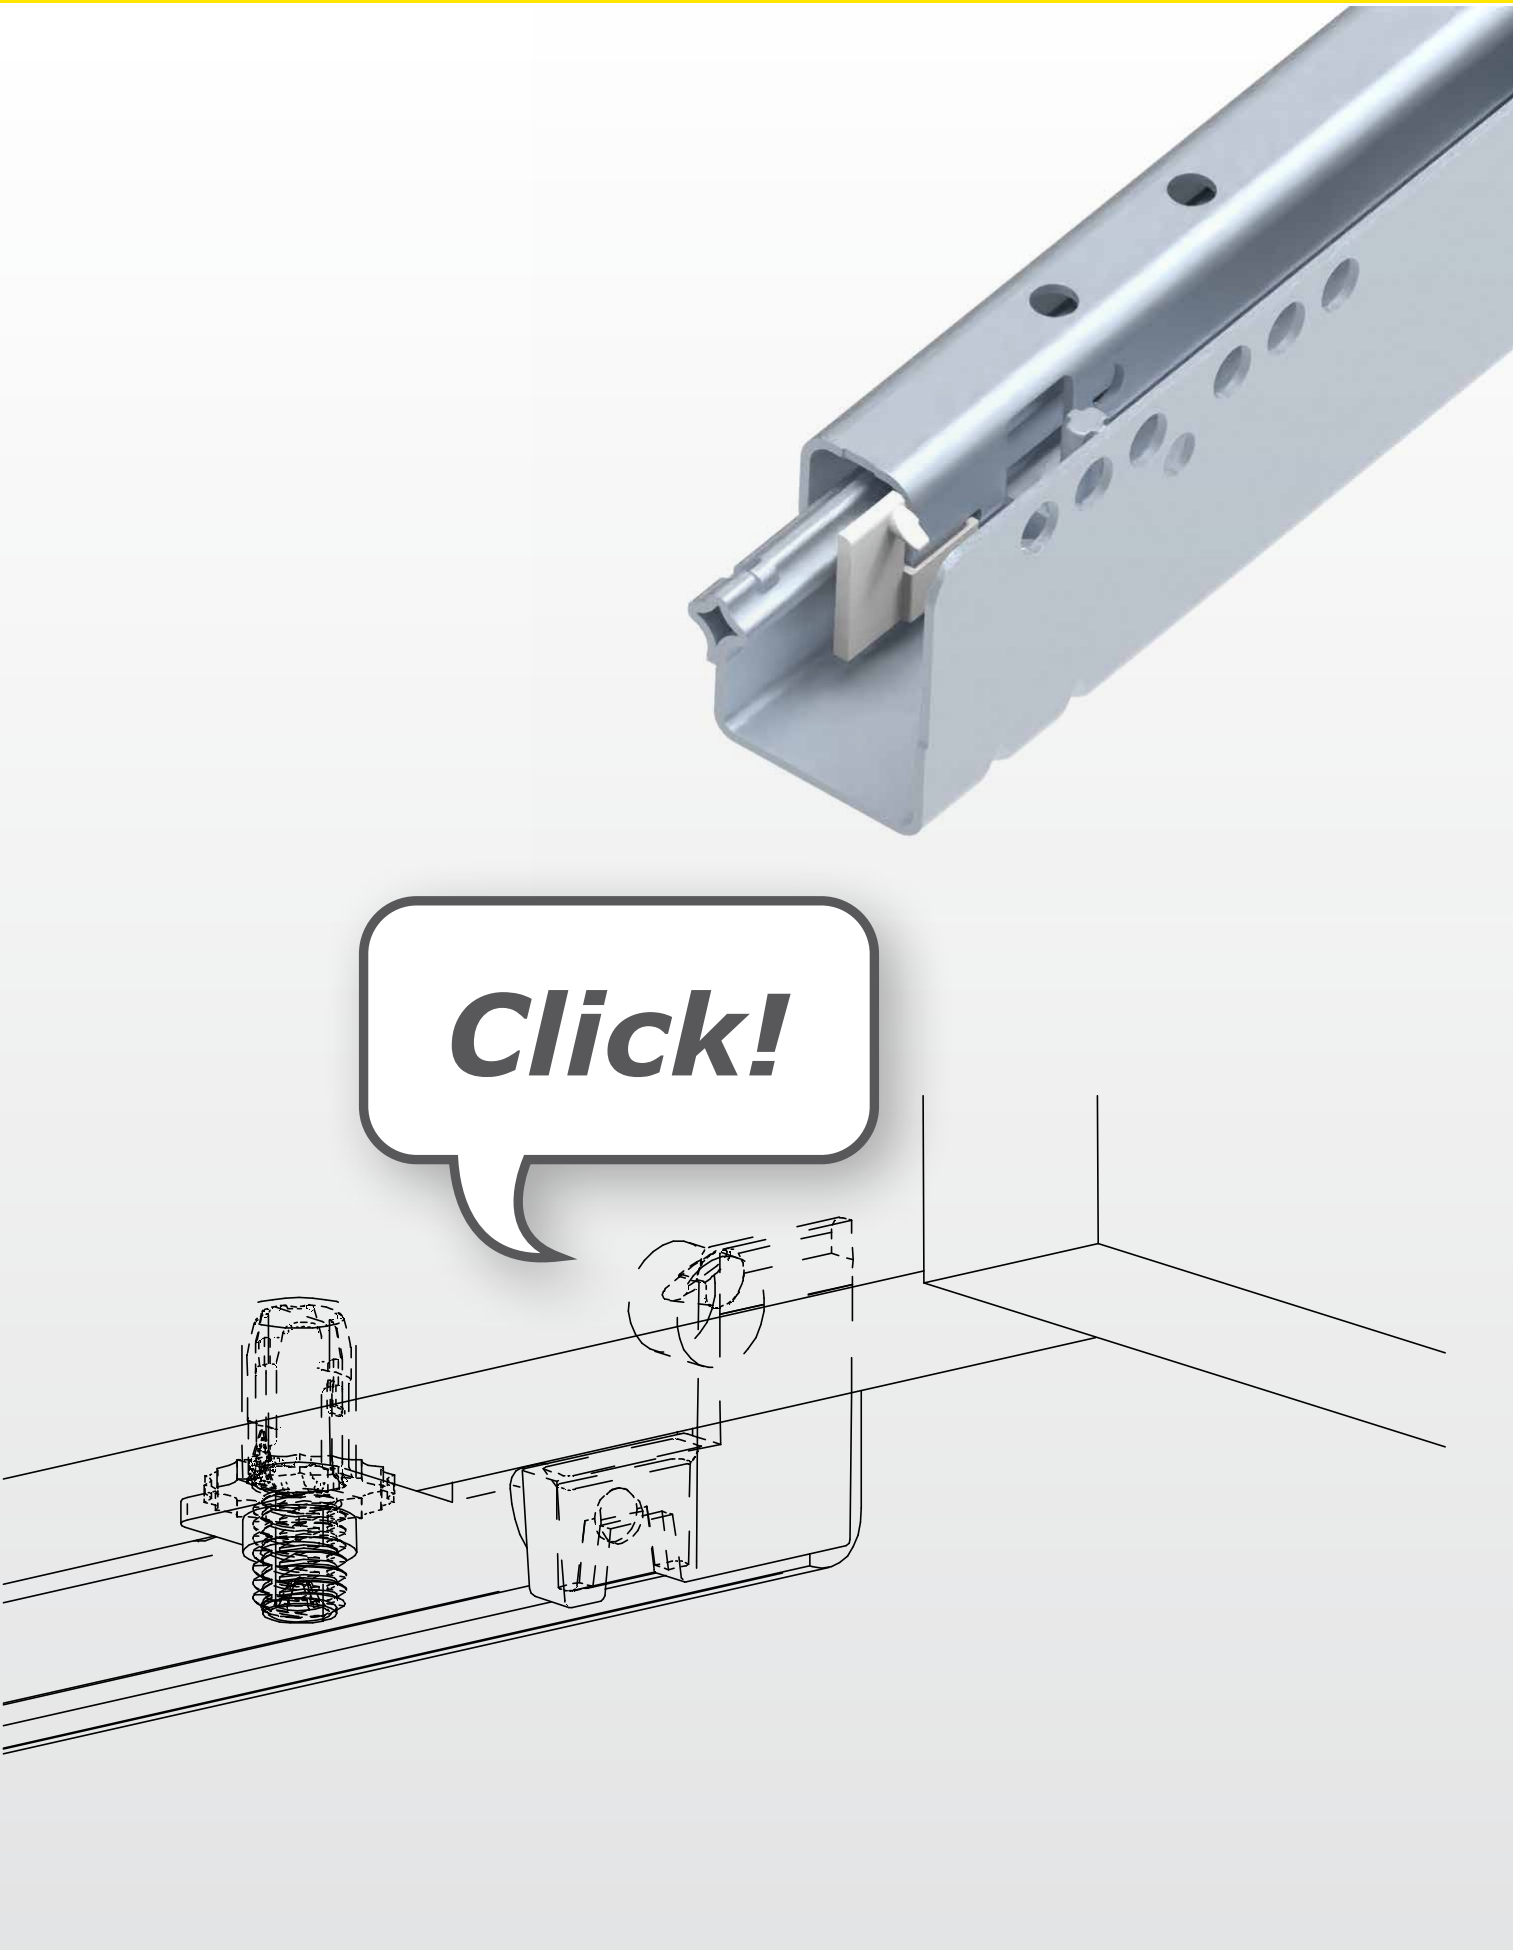

Assembly instructions

Hole patterns and drawer width \_\_\_\_\_ Page 90

Lift Lock for PERFECT stub version \_\_\_\_\_ Page 92

Lift Lock for PERFECT \_\_\_\_\_ Page 94

Lift Lock for EXTREME \_\_\_\_\_ Page 96


PERFECT/EXTREME PEANUT® \_\_\_\_\_ Page 98

Coupling for PERFECT/EXTREME \_\_\_\_\_ Page 100


Product

Our products can be installed in just a few simple steps. The easy-to-understand instructions ensure that even consumers with no previous knowledge can install them effortlessly.


## Hole patterns

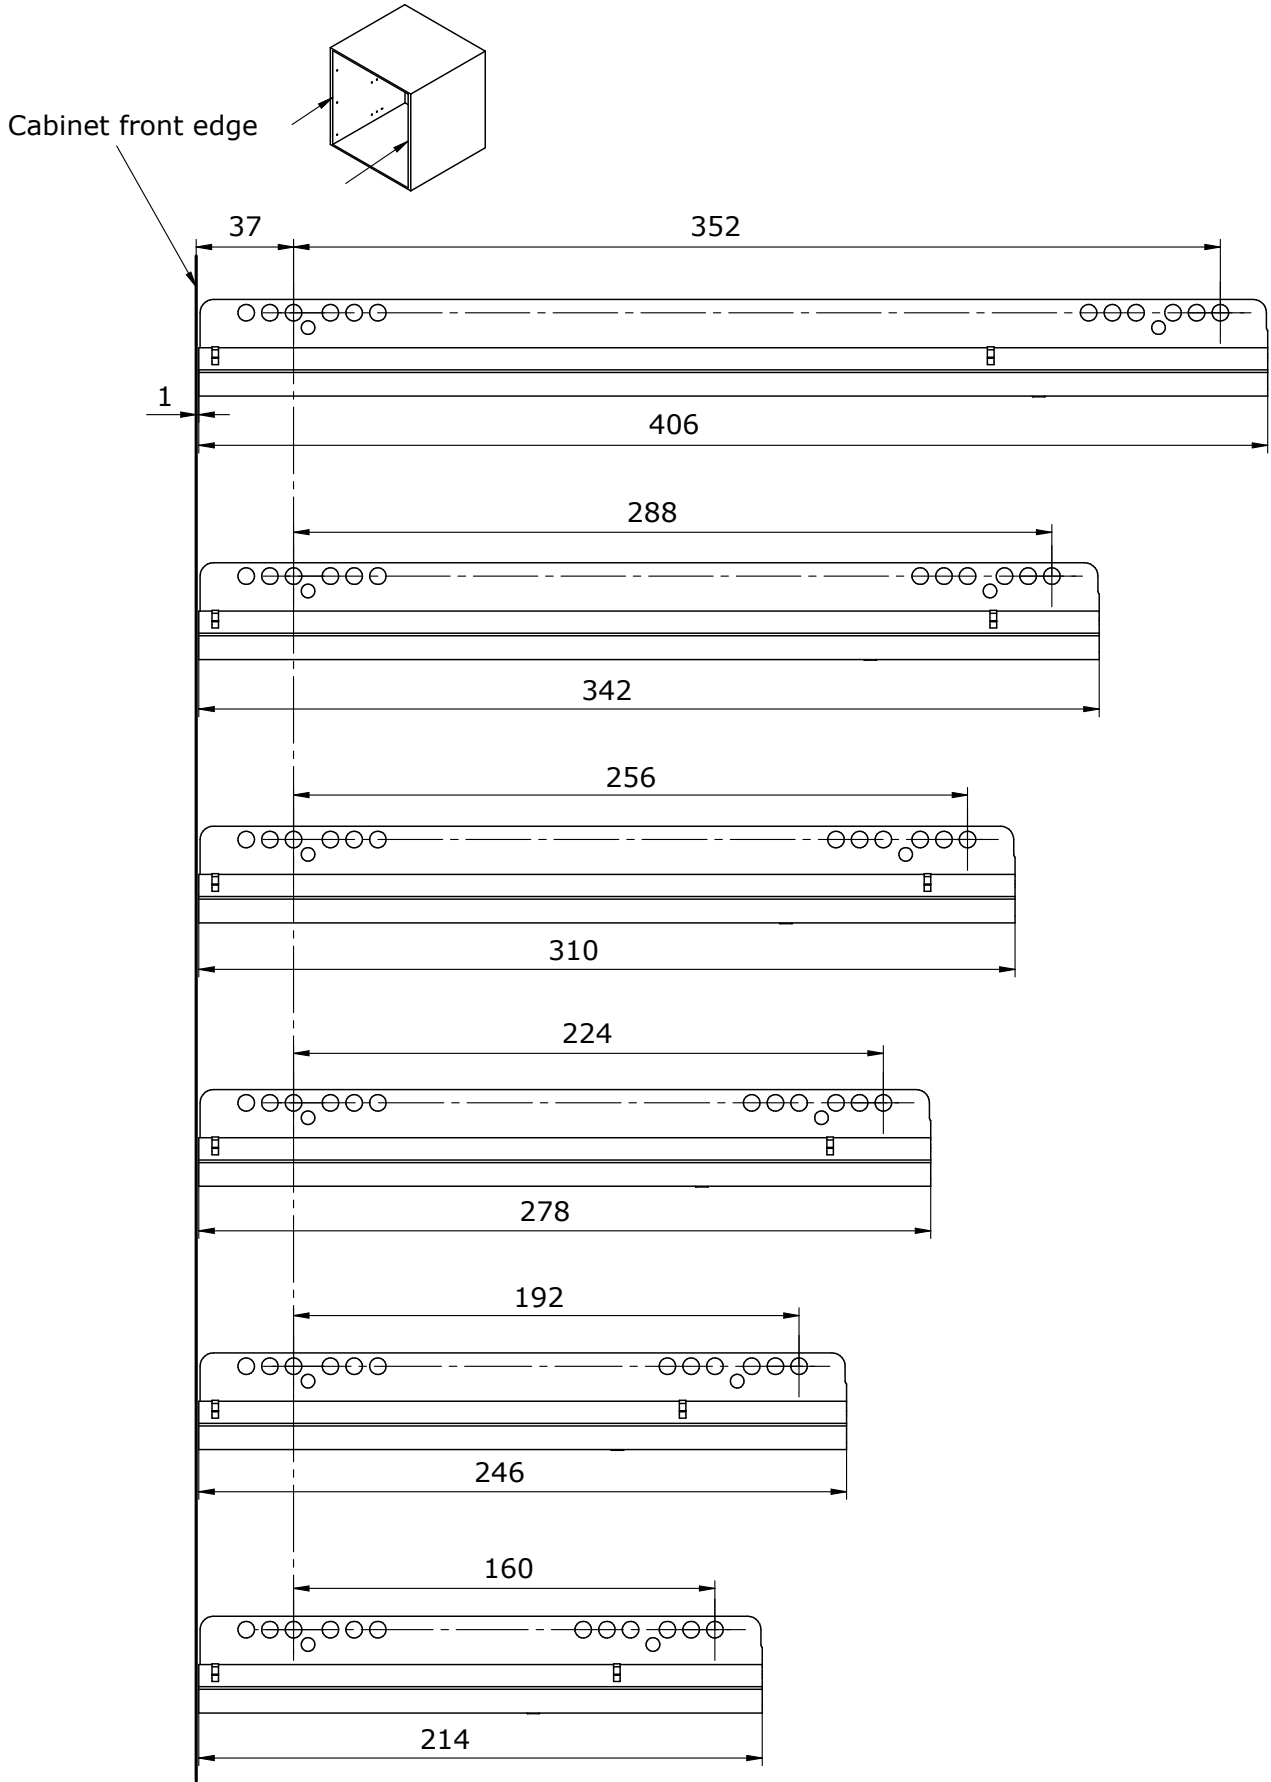

## Reveal gap

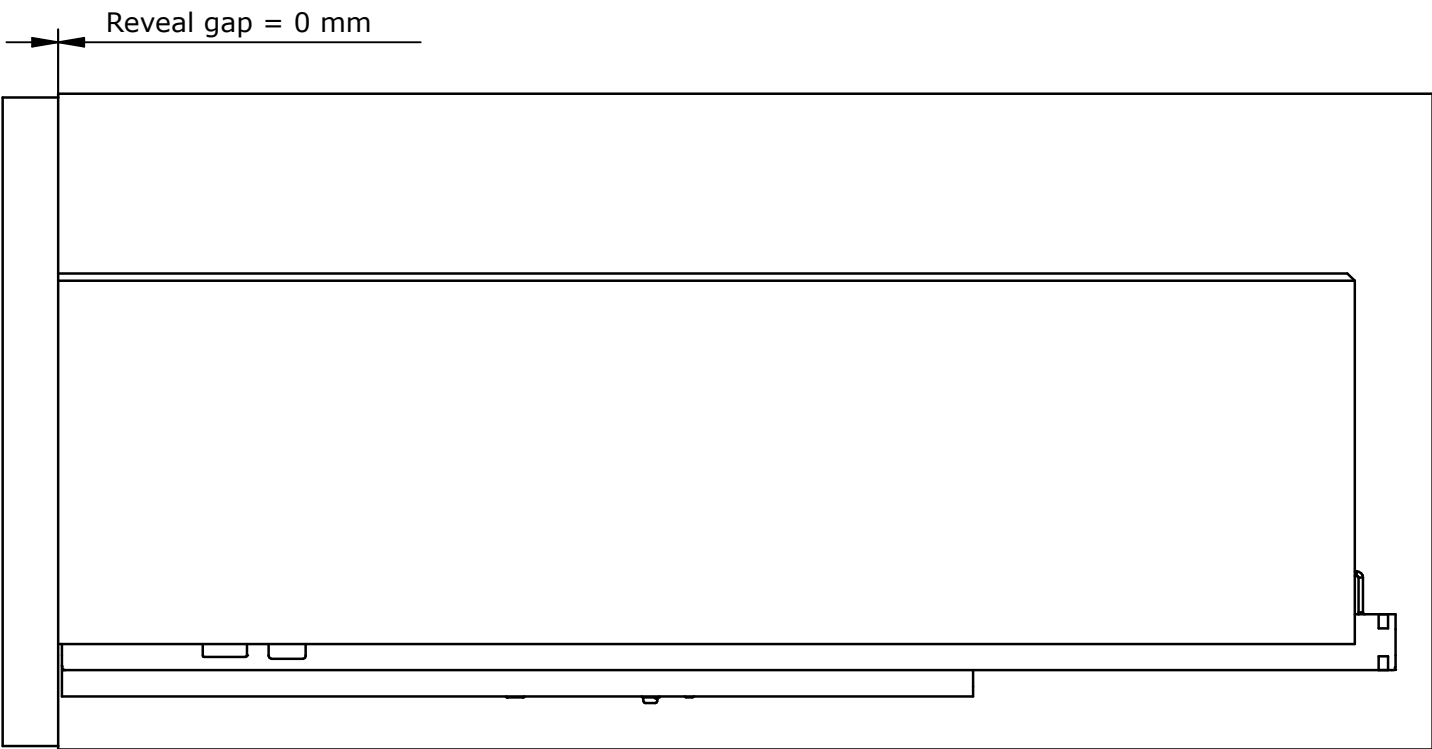


## Inside drawer width

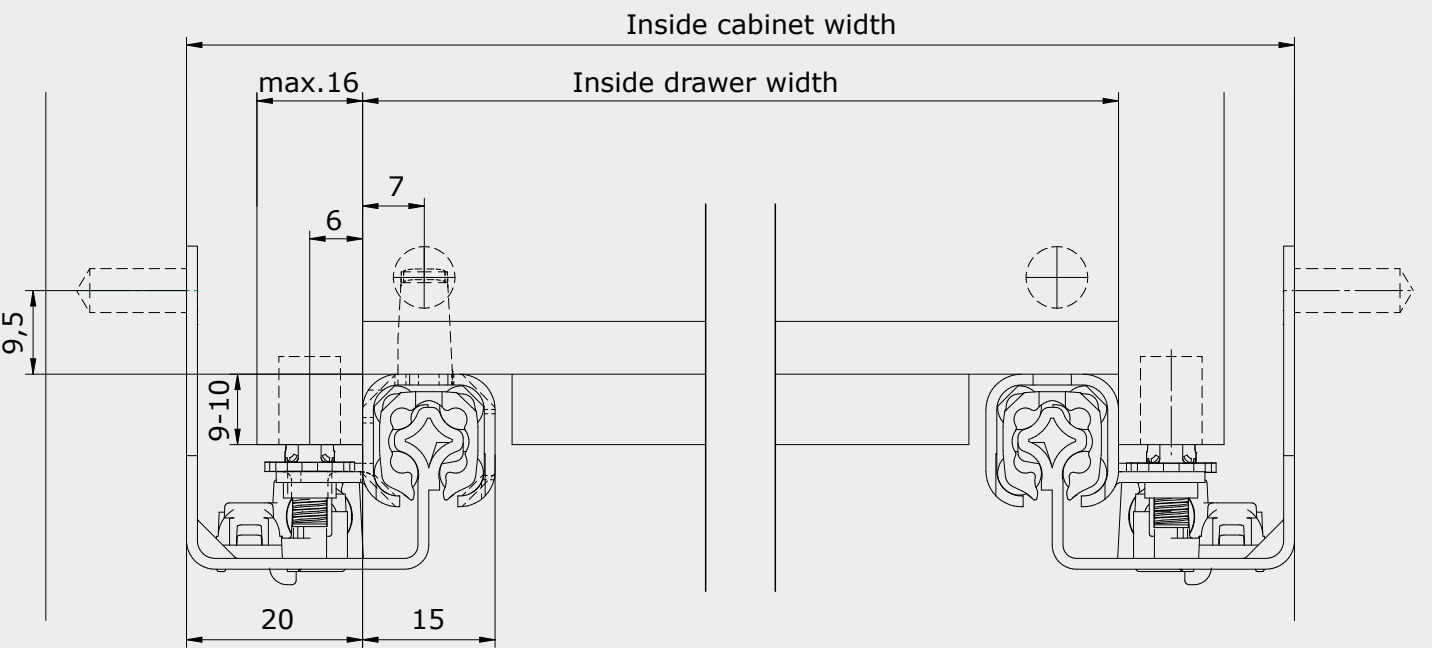


### Example calculation

Inside drawer width = Inside cabinet width - 40 mm


## Drillings and cut-outs in drawer

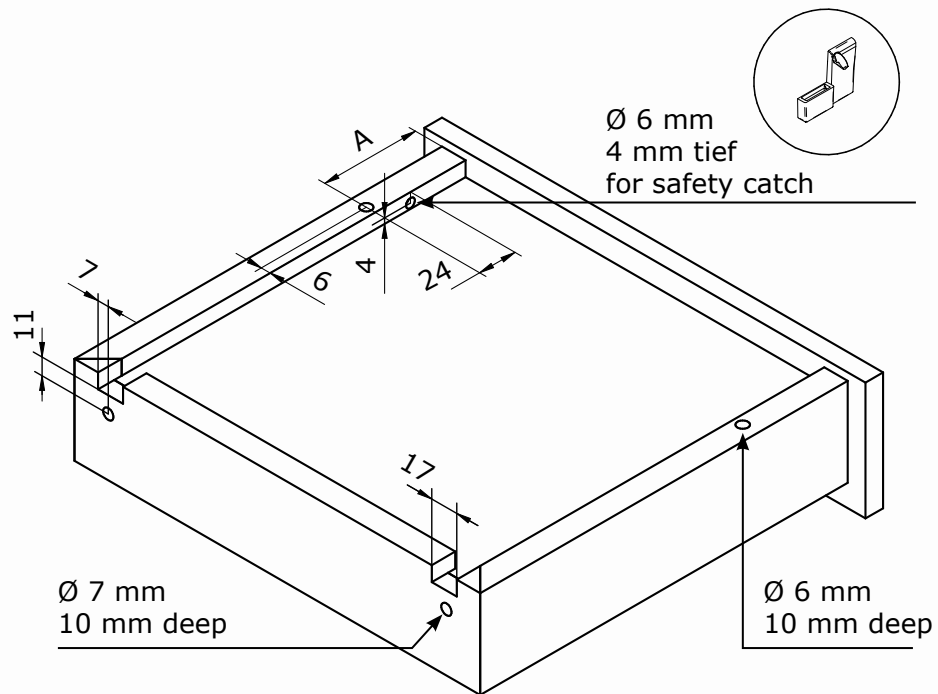

## Mounting holes

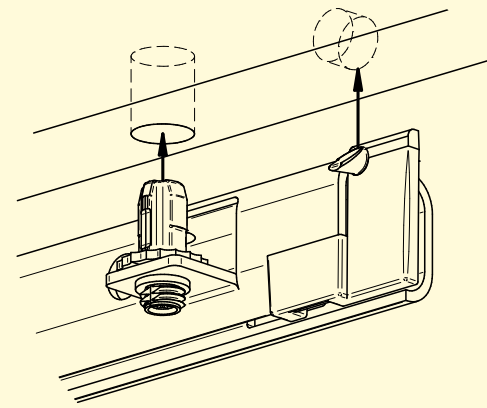


## Installation dimensions for drawer

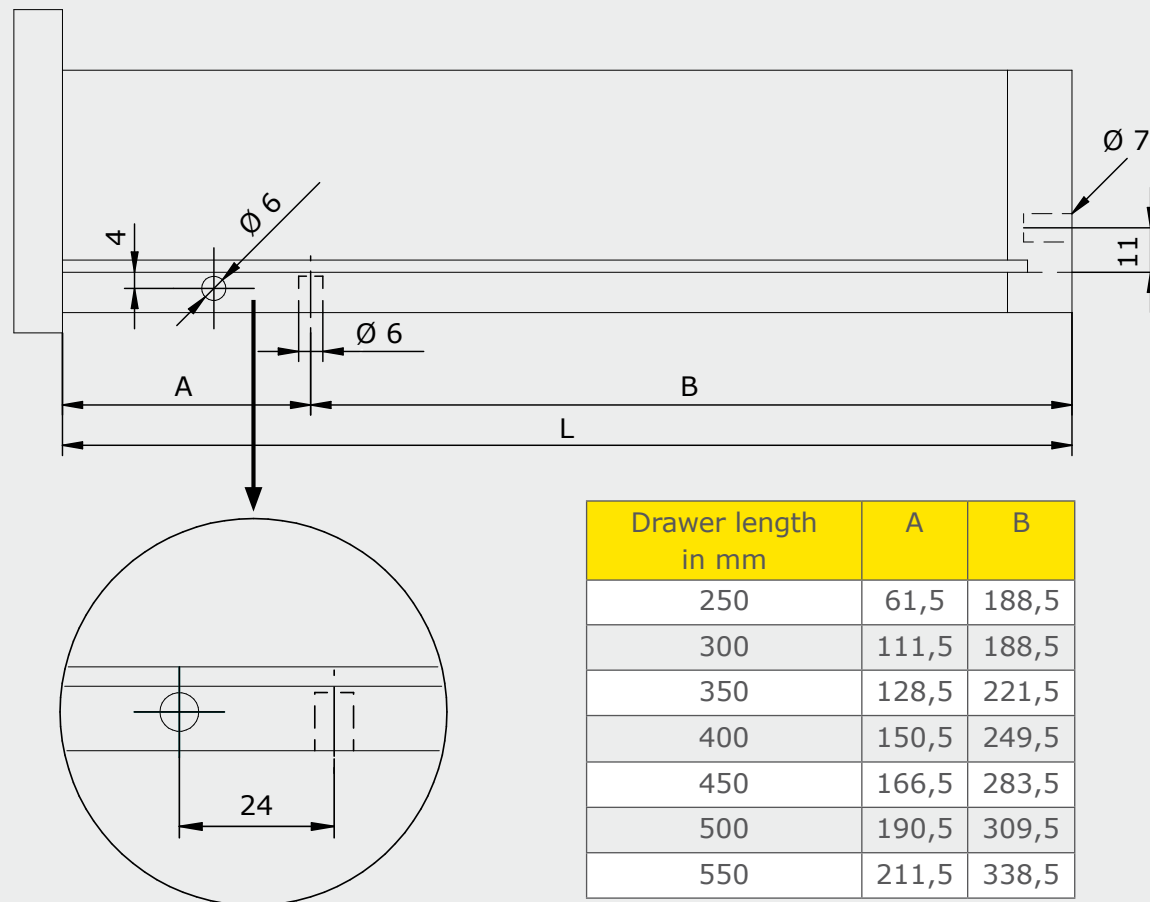

| Drawer length<br>in mm | A     | B     |
|------------------------|-------|-------|
| 250                    | 61,5  | 188,5 |
| 300                    | 111,5 | 188,5 |
| 350                    | 128,5 | 221,5 |
| 400                    | 150,5 | 249,5 |
| 450                    | 166,5 | 283,5 |
| 500                    | 190,5 | 309,5 |
| 550                    | 211,5 | 338,5 |

## Mounting


1

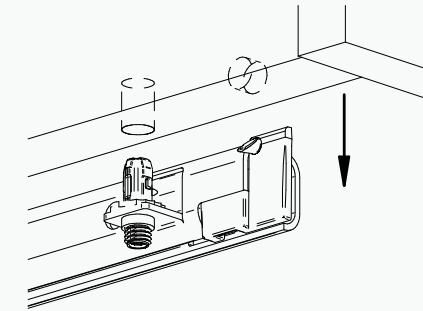

Place the drawer onto the slide. The spring mechanism of the safety catch automatically secures the drawer in place.


## Dismounting

1




Press the safety catch inward to unlock the drawer.

2

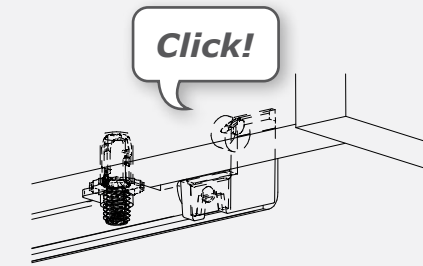


The drawer is locked.

2




Once the safety catch is no longer engaged in the mounting hole, the drawer can be lifted.

3

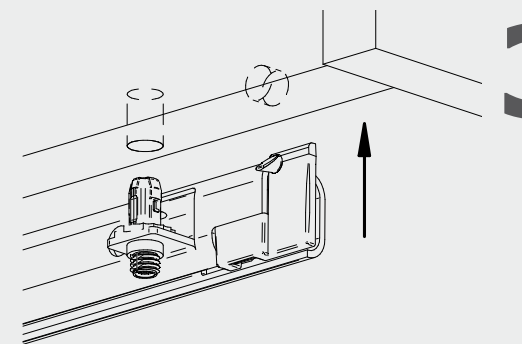


The drawer is now unlocked.


Drillings and cut-outs in drawer

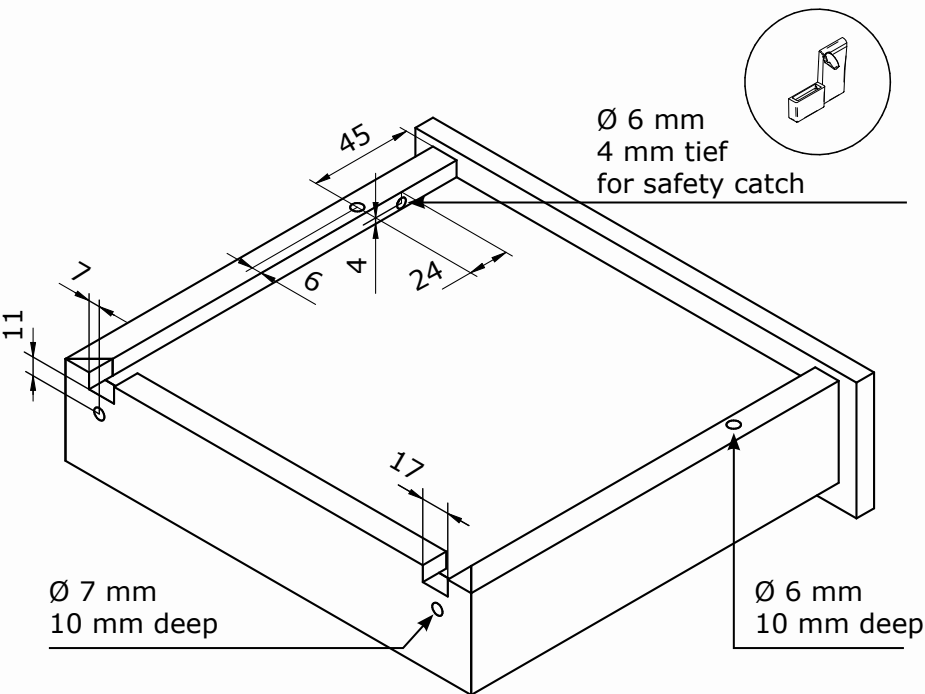

Mounting holes

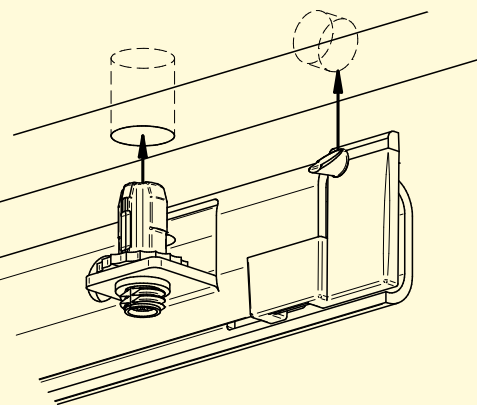


Installation dimensions for drawer

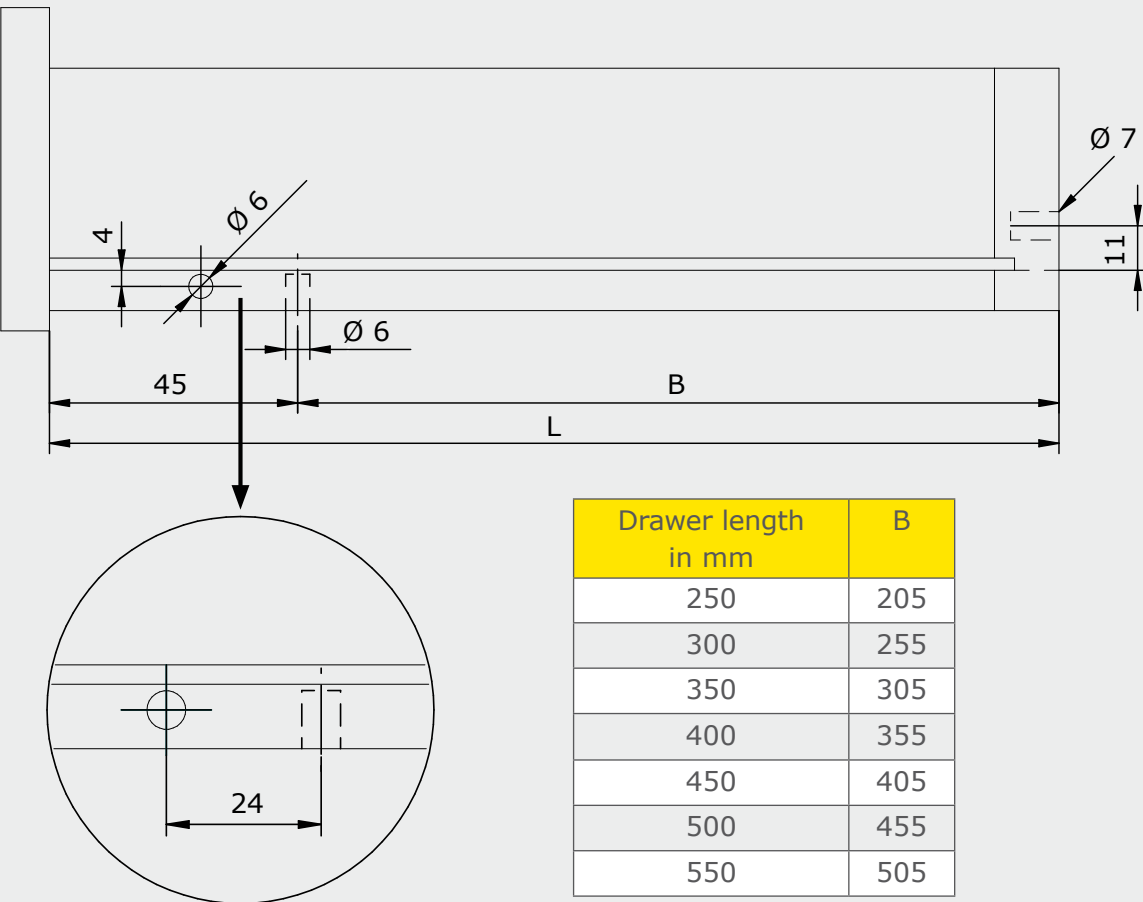

| Drawer length in mm | B   |
|---------------------|-----|
| 250                 | 205 |
| 300                 | 255 |
| 350                 | 305 |
| 400                 | 355 |
| 450                 | 405 |
| 500                 | 455 |
| 550                 | 505 |

Mounting


1

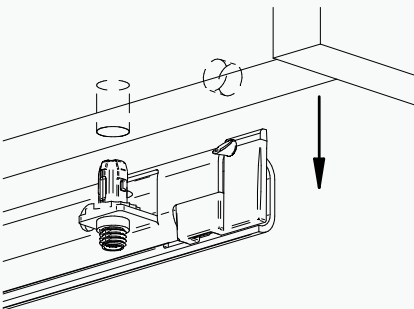

Place the drawer onto the slide. The spring mechanism of the safety catch automatically secures the drawer in place.


Dismounting

1




Press the safety catch inward to unlock the drawer.

2

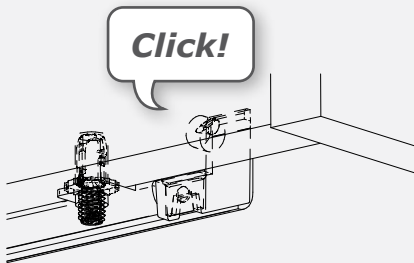


The drawer is locked.

2




Once the safety catch is no longer engaged in the mounting hole, the drawer can be lifted.

3

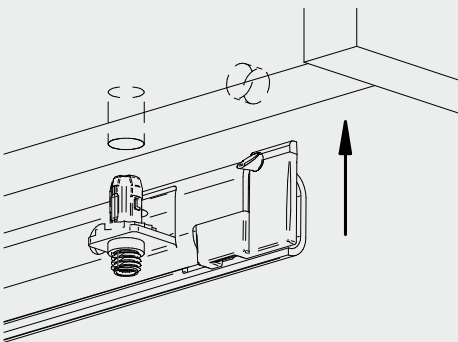


The drawer is now unlocked.


Drillings and cut-outs in drawer

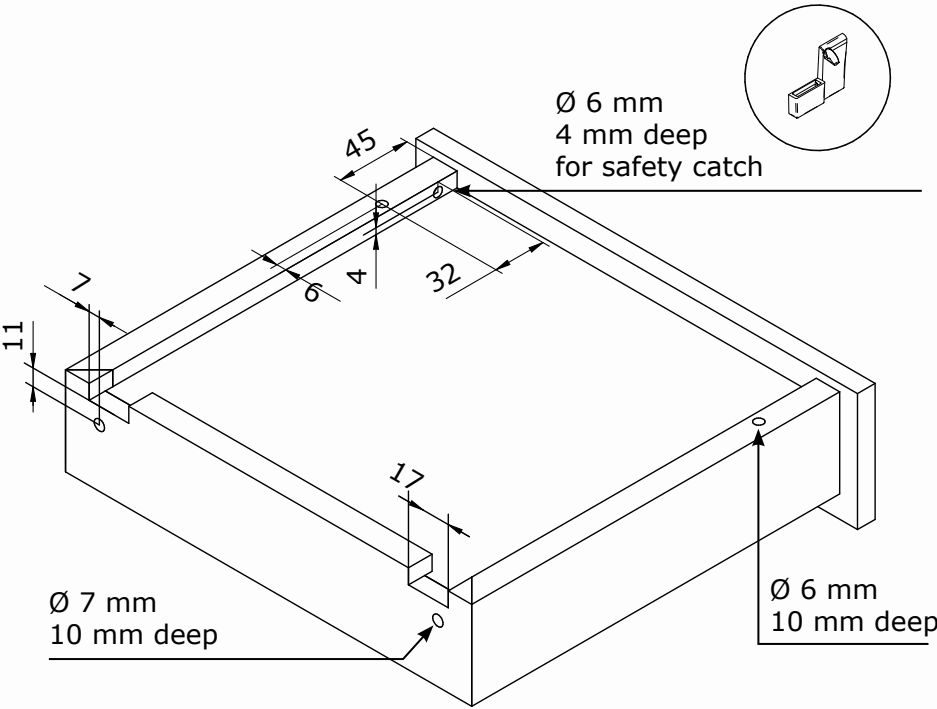

Mounting holes

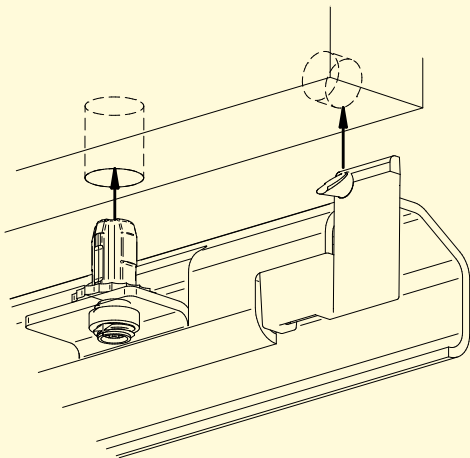


Installation dimensions for drawer

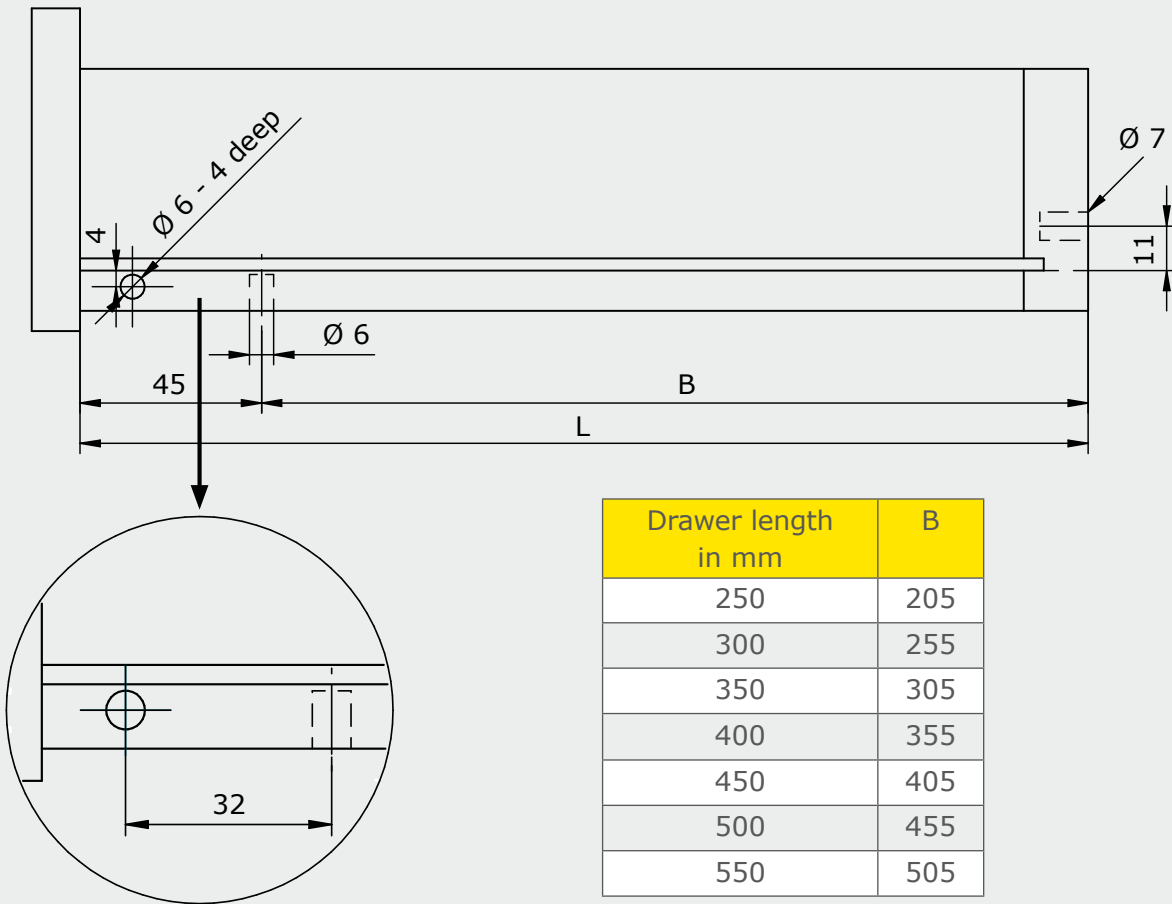

| Drawer length in mm | B   |
|---------------------|-----|
| 250                 | 205 |
| 300                 | 255 |
| 350                 | 305 |
| 400                 | 355 |
| 450                 | 405 |
| 500                 | 455 |
| 550                 | 505 |

Mounting


1

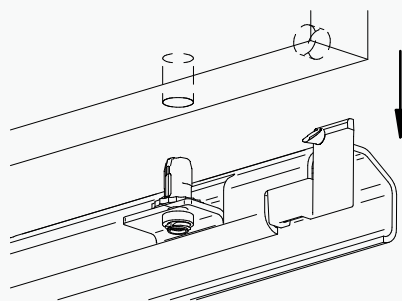

Place the drawer onto the slide. The spring mechanism of the safety catch automatically secures the drawer in place.


Dismounting

1




Press the safety catch inward to unlock the drawer.

2

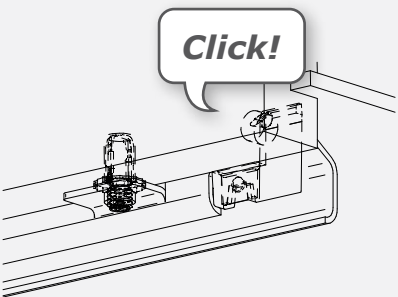


The drawer is locked.

2



Once the safety catch is no longer engaged in the mounting hole, the drawer can be lifted.


3

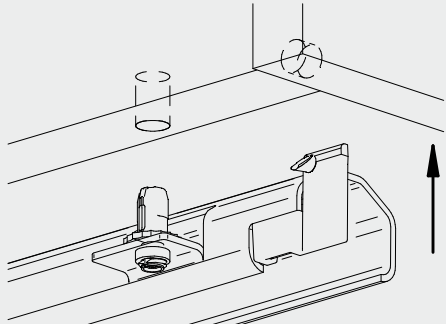

The drawer is now unlocked.


Mounting

1

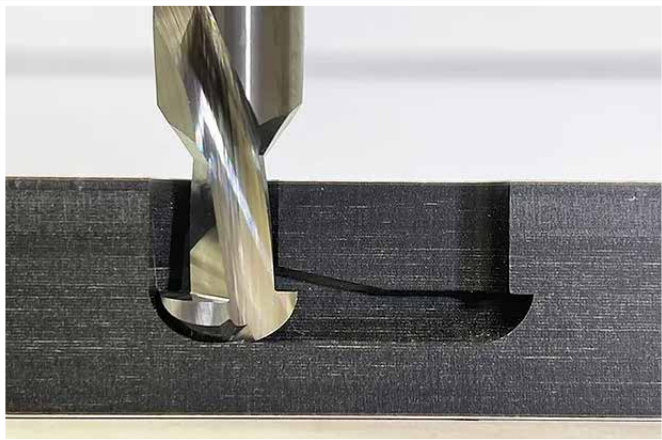


Route the PEANUT®-Slots with the PEANUT® Cutter

4

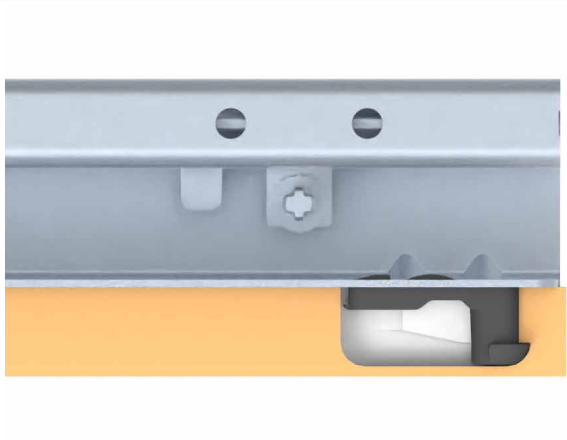

When the end of the PEANUT slot is reached, the PERFECT/EXTREME PEANUT snaps into the slot, locking the drawer slide in place.

2

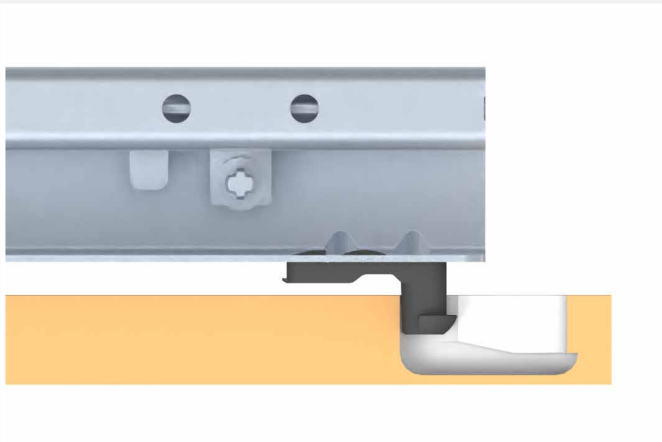


Insert the PERFECT/EXTREME PEANUT® drawer slide into the machined PEANUT® slot.

5



No tools or screws are required, making the PERFECT/EXTREME PEANUT drawer slide immediately ready for use.

3

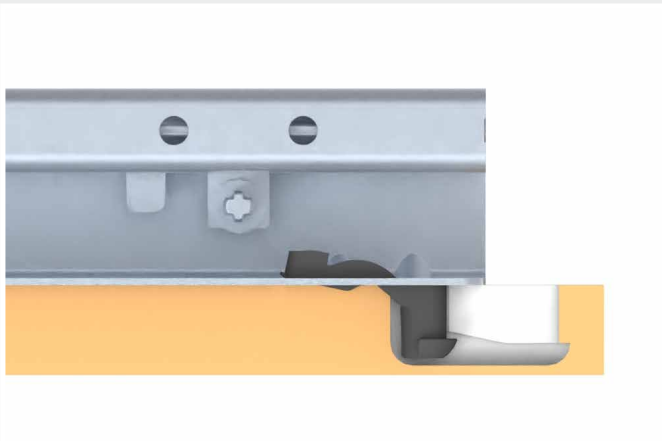

As the PERFECT/EXTREME PEANUT drawer slide is pushed into the PEANUT slot, a clamping connection is formed between the cabinet and the drawer slide.


Dismounting

1




Use a small flat object (e.g., a screwdriver) to disengage the lock. Then, the slide can be removed in the direction opposite to the assembly.

Drillings and cut-outs in drawer

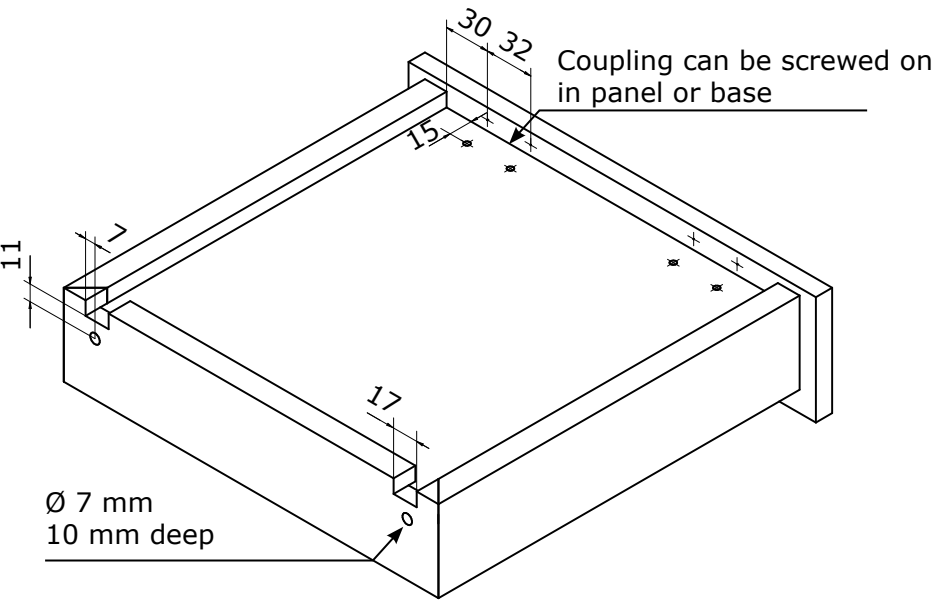


Coupling

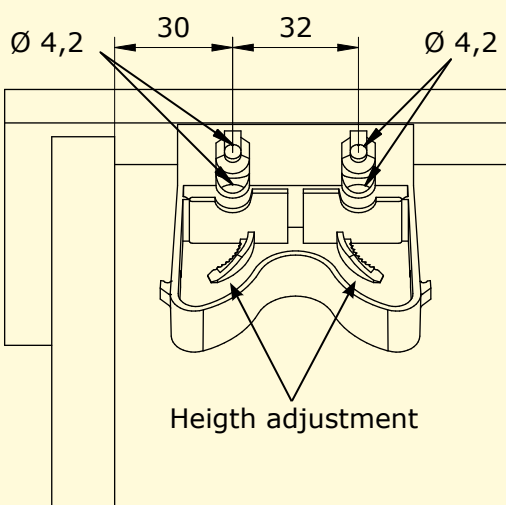

Mounting


1

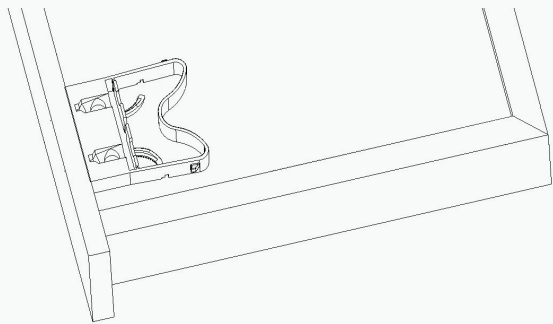

Place the drawer onto the slide. The spring mechanism of the safety catch automatically secures the drawer in place.


Dismounting

1

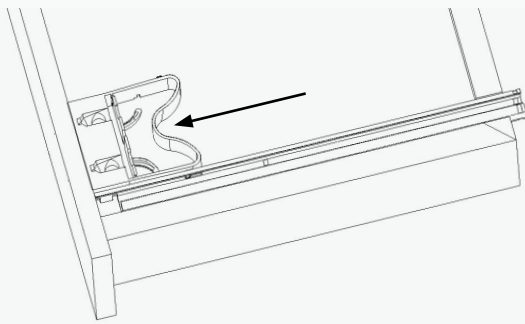


The drawer is unhooked by pressing on the coupling. The drawer is unlocked by the coupling.

2

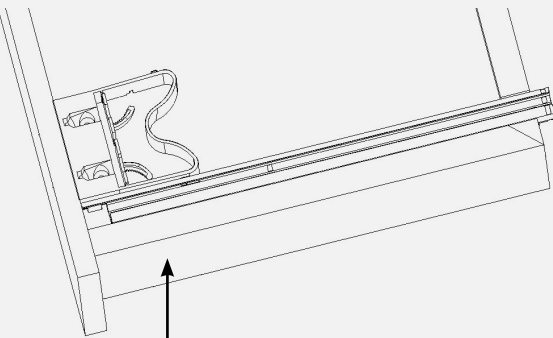


The drawer is assembled by placing it on the two runners.

2

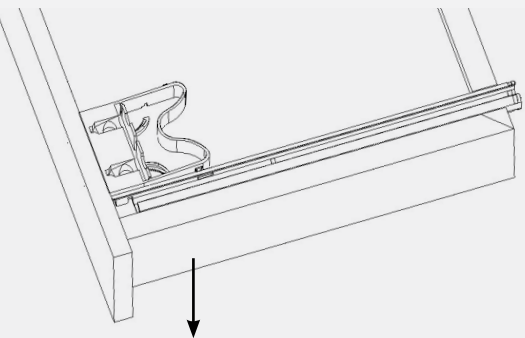

Now lift out the drawer.

Inside drawer width

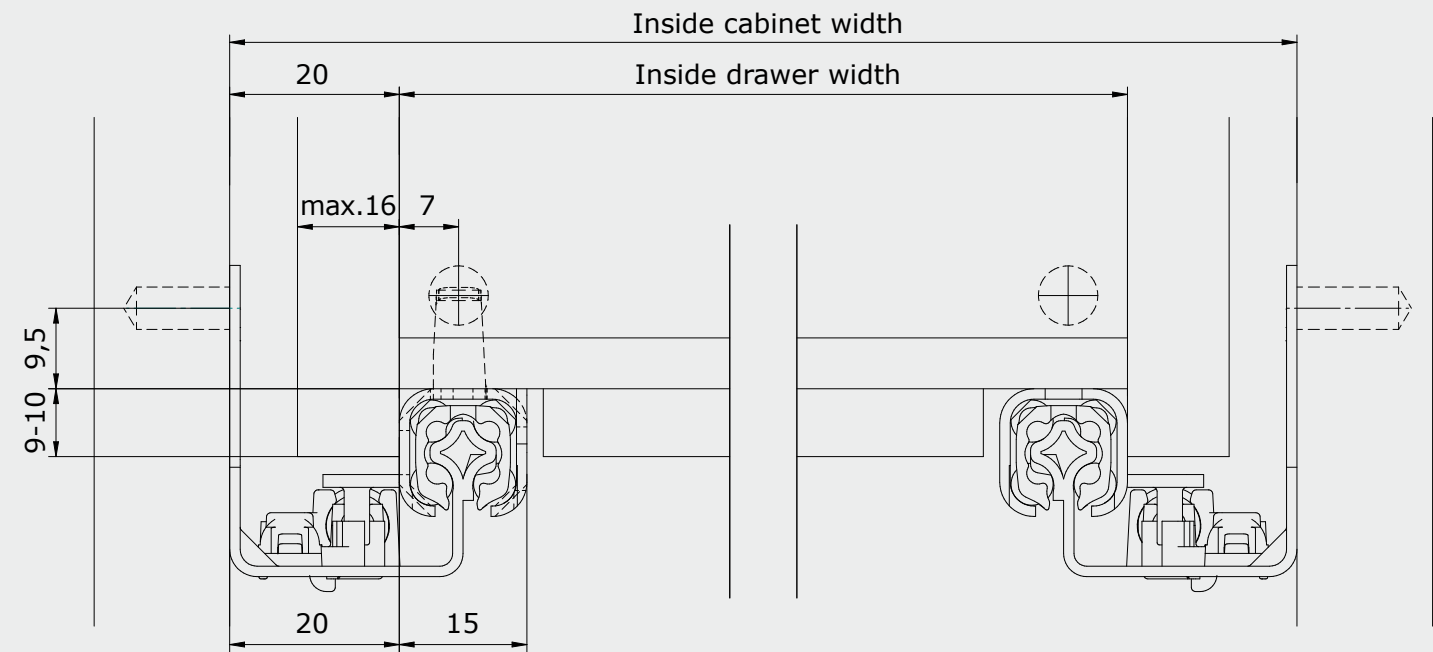

Example calculation


Inside drawer width = Inside cabinet width - 40 mm

1D coupling


The 1D coupling for PERFECT is height-adjustable and allows for precise installation. With this coupling variant, drawers can be fitted and removed in no time at all. A precise joint pattern can be achieved quickly, easily and without any tools. You can find the matching installation video on our REME YouTube channel (QR code).



Drillings and cut-outs in drawer

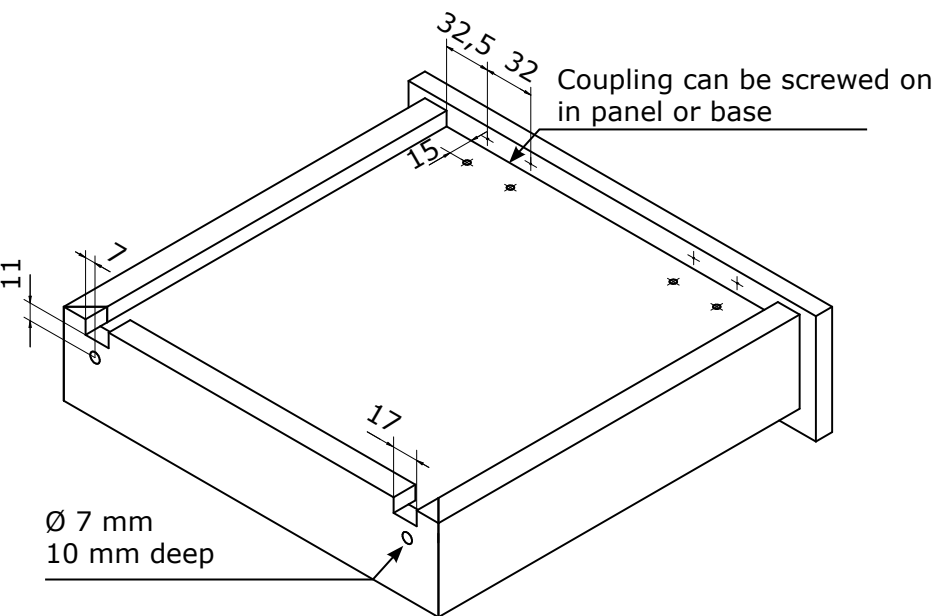


Coupling

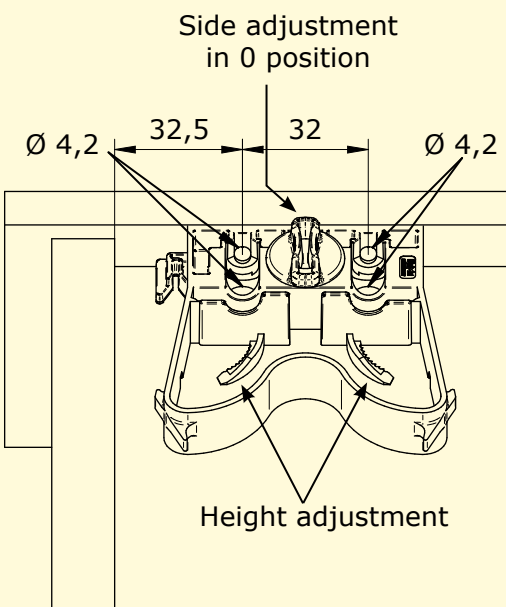

Mounting


1

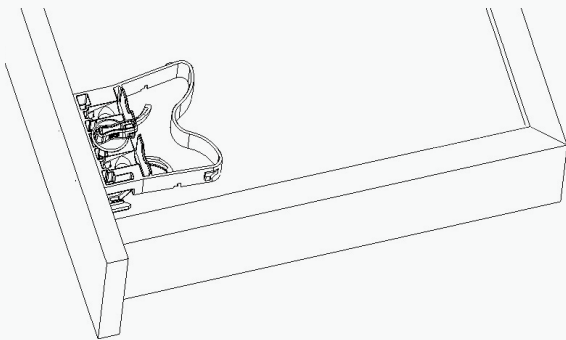

The two couplings are screwed to the panel or the base of the drawer. The coupling with lateral adjustment is mounted on the left and the coupling without lateral adjustment is mounted on the right.


Dismounting

1

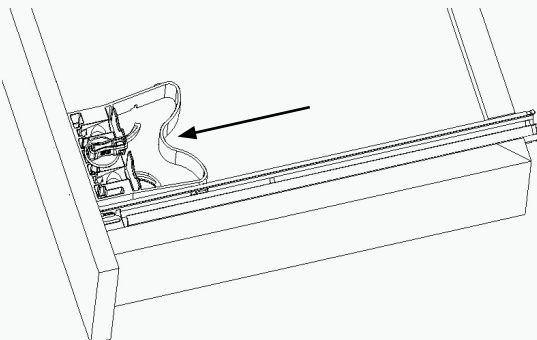


The drawer is unhooked by pressing on the coupling. The drawer is unlocked by the coupling.

2

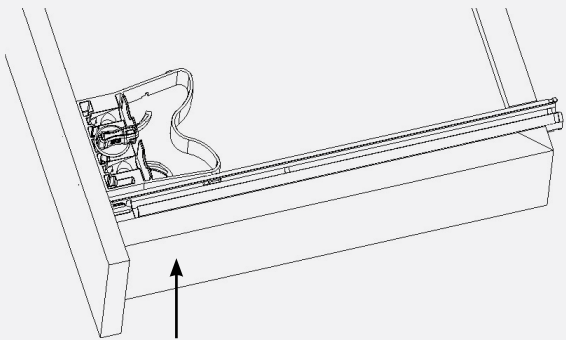


The drawer is assembled by placing it on the two runners.

2

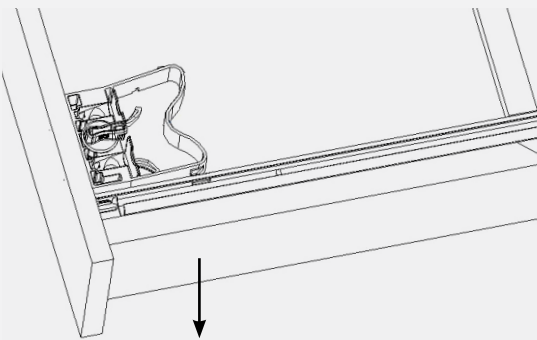

Now lift out the drawer.


Inside drawer width

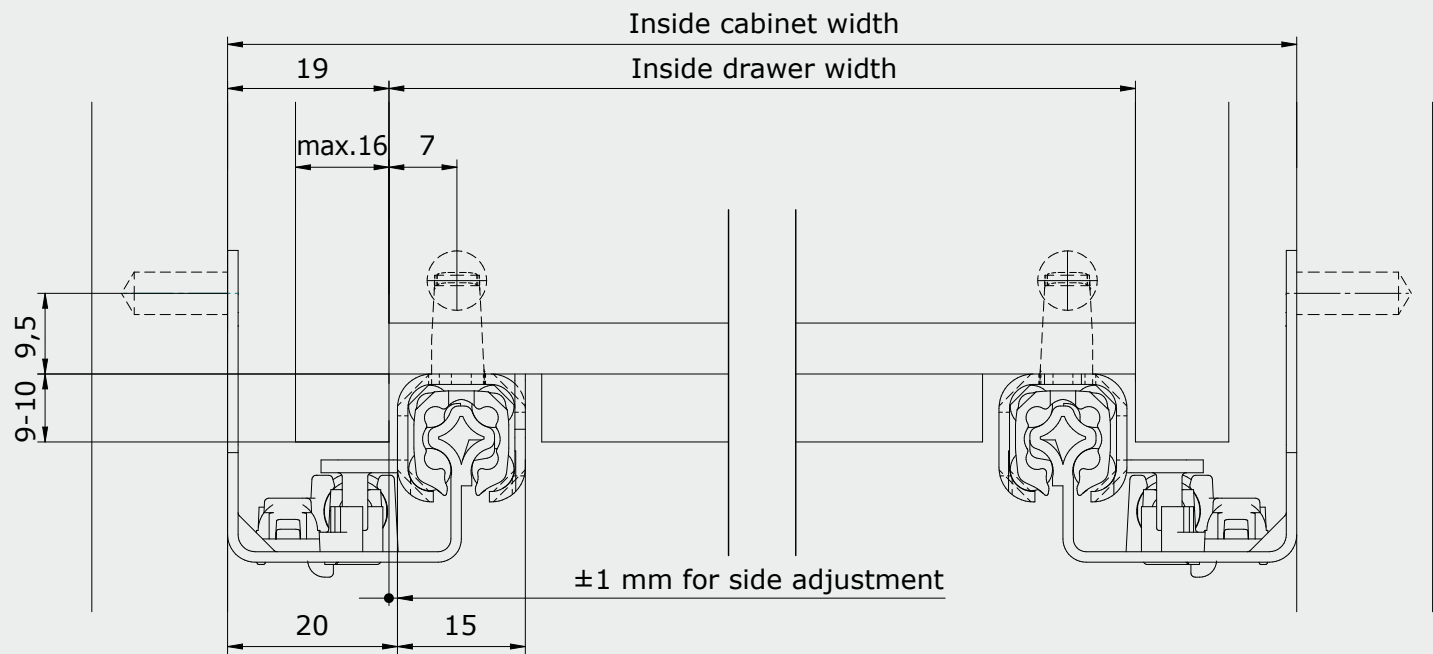


**Example calculation**  
Inside drawer width = Inside cabinet width - 38 mm

2D coupling


The 2D coupling for PERFECT is height and side-adjustable and allows for precise installation. With this coupling variant, drawers can be fitted and removed in no time at all. A precise joint pattern can be achieved quickly, easily and without any tools. You can find the matching installation video on our REME YouTube channel (QR code).

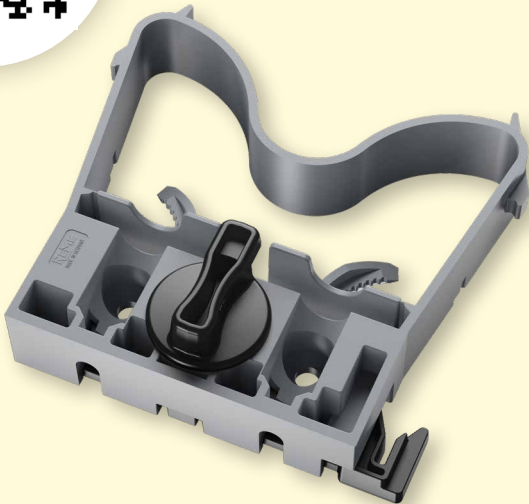

Drillings and cut-outs in drawer

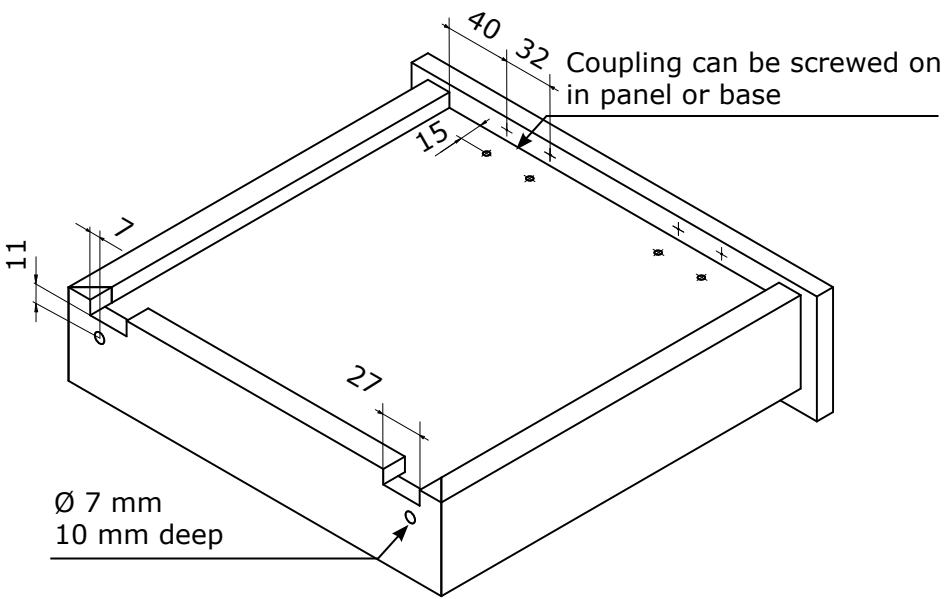


Coupling

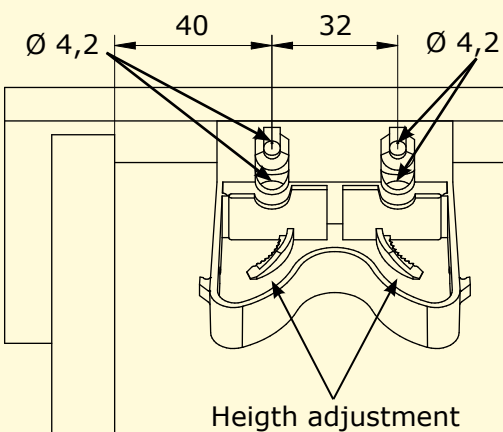

Mounting


1

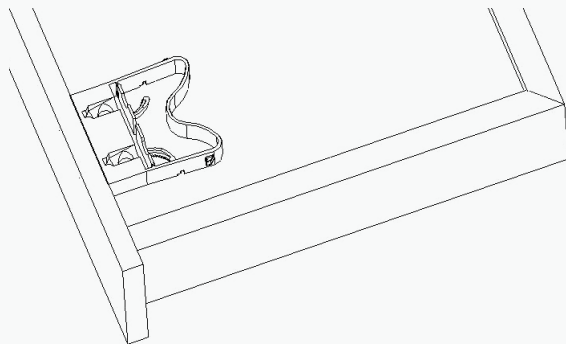

Place the drawer onto the slide. The spring mechanism of the safety catch automatically secures the drawer in place.


Dismounting

1

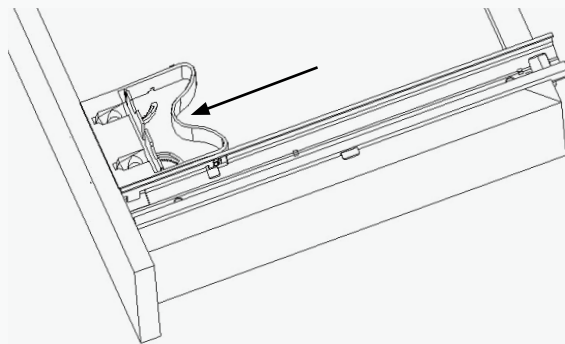


The drawer is unhooked by pressing on the coupling. The drawer is unlocked by the coupling.

2

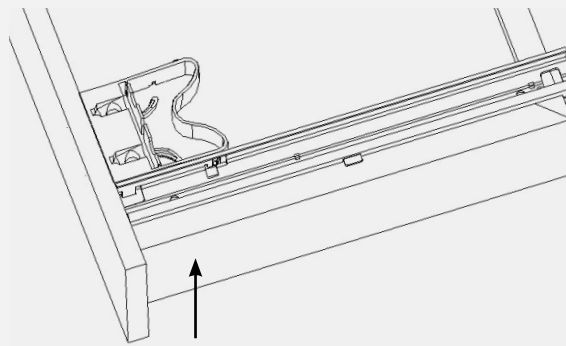


The drawer is assembled by placing it on the two runners.

2

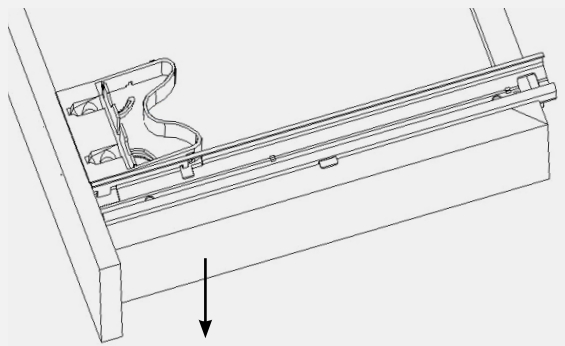

Now lift out the drawer.

Inside drawer width

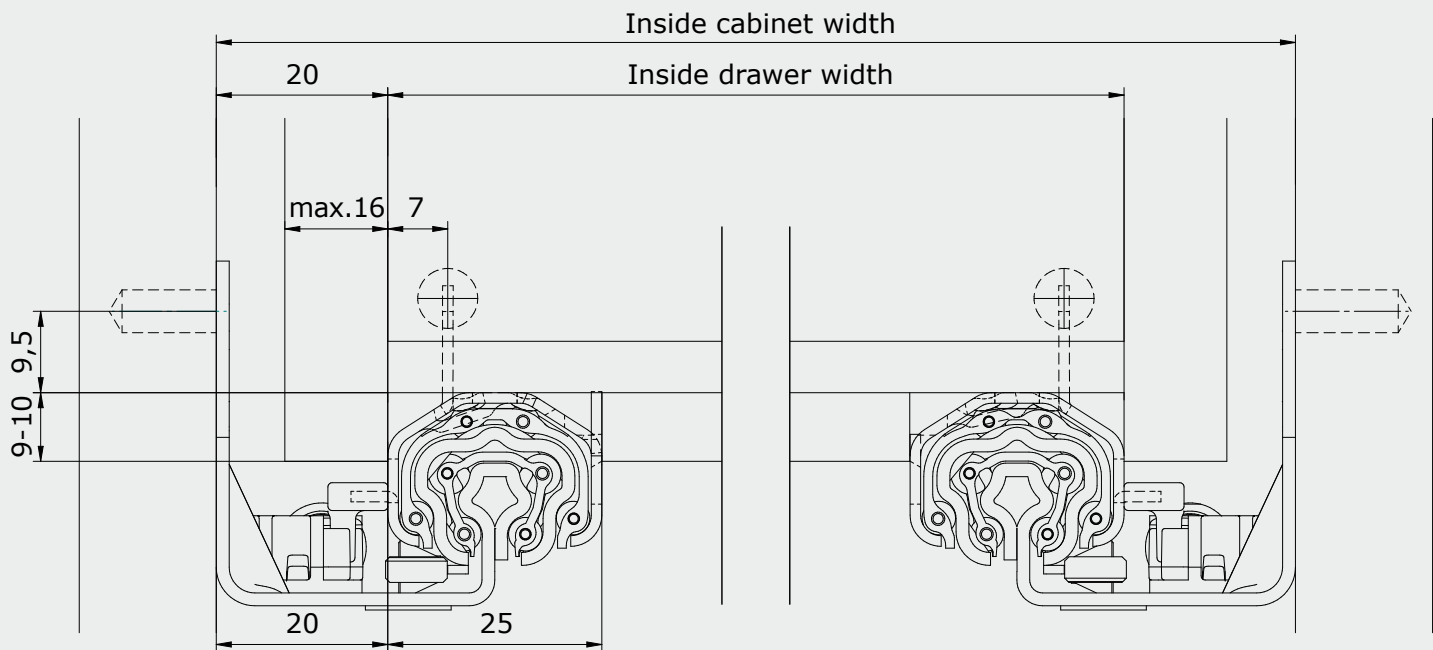

Example calculation


Inside drawer width = Inside cabinet width - 40 mm

1D Coupling


The 1D coupling for EXTREME is height-adjustable and allows for precise installation. With this coupling variant, drawers can be fitted and removed in no time at all. A precise joint pattern can be achieved quickly, easily and without any tools. You can find the matching installation video on our REME YouTube channel (QR code).



Drillings and cut-outs in drawer

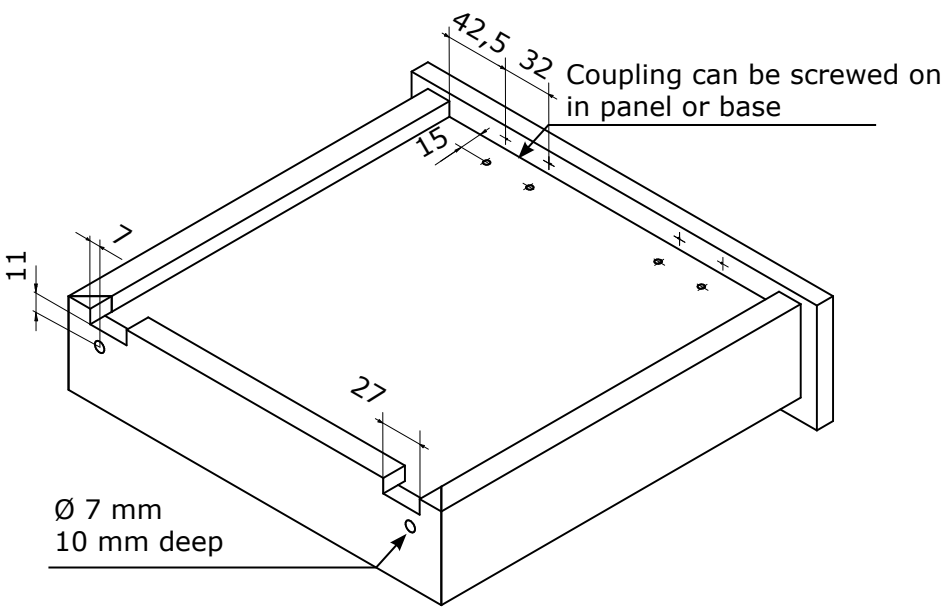


Coupling

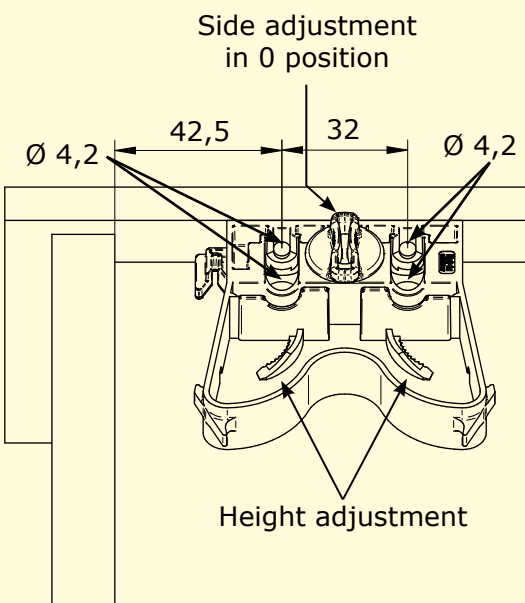

Mounting


1

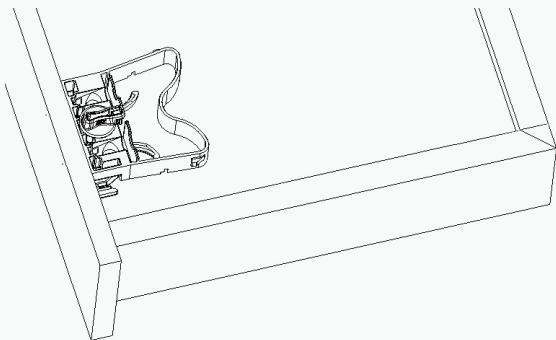

The two couplings are screwed to the panel or the base of the drawer. The coupling with lateral adjustment is mounted on the left and the coupling without lateral adjustment is mounted on the right.


Dismounting

1

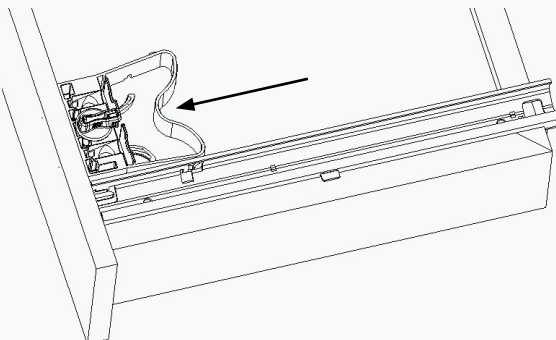


The drawer is unhooked by pressing on the coupling. The drawer is unlocked by the coupling.

2

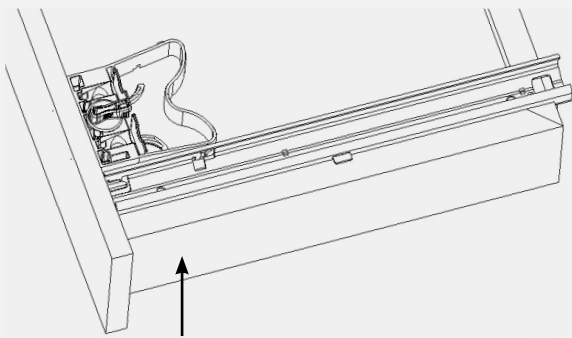


The drawer is assembled by placing it on the two runners.

2

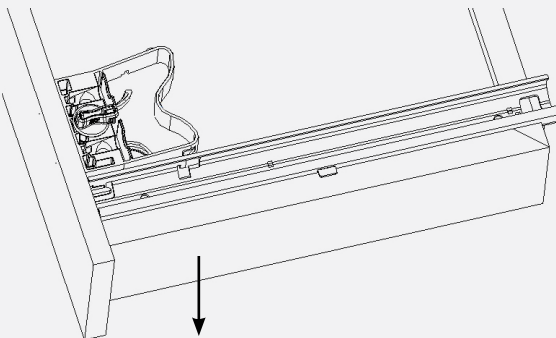

Now lift out the drawer.

Inside drawer width

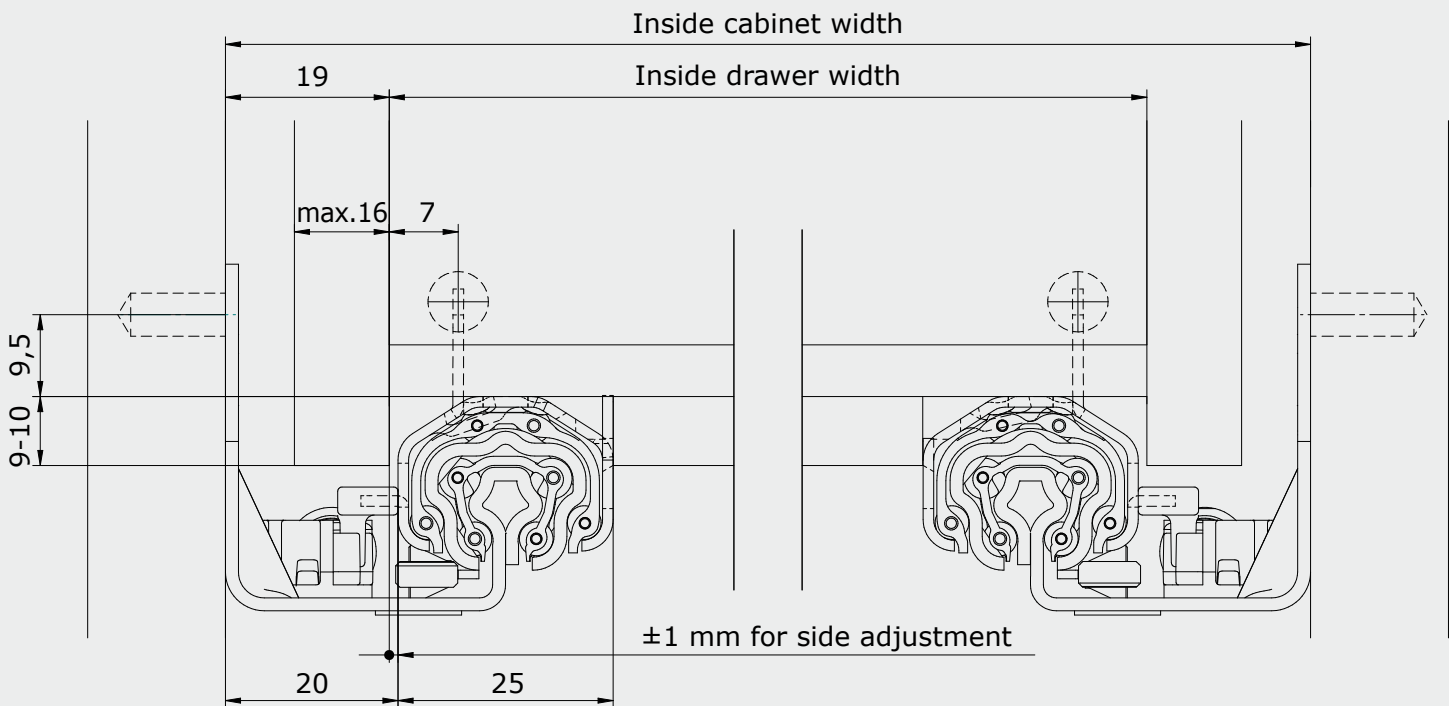


Example calculation

Inside drawer width = Inside cabinet width - 38 mm

2D coupling

The 2D coupling for EXTREME is height- and side-adjustable and allows for precise installation. With this coupling variant, drawers can be fitted and removed in no time at all. A precise joint pattern can be achieved quickly, easily and without any tools. You can find the matching installation video on our REME YouTube channel (QR code).

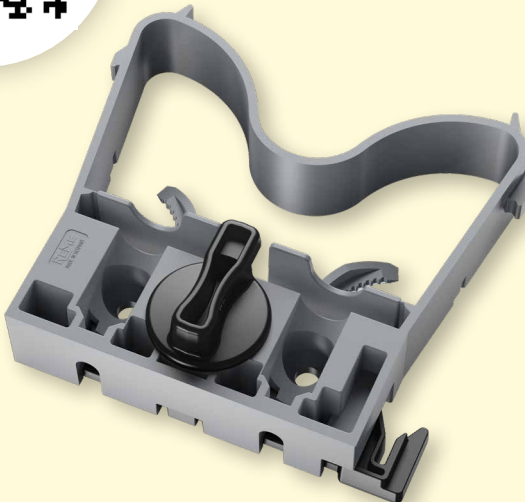



# Alignment fitting


Alignment fitting \_\_\_\_\_ Page 110

## Product


Alignment fittings from REME are used to prevent or even straighten the undesirable warping of sliding doors. By tightening the clamping sleeve, tensile stress is achieved and the door is optimally aligned. Dimensional stability even under high stress guarantees a secure hold for heavily warped doors.

## Request and order


Do you have any questions about our products or would like to have an non-binding offer? Then simply contact us now.  
We'll be glad to help you!



Structure

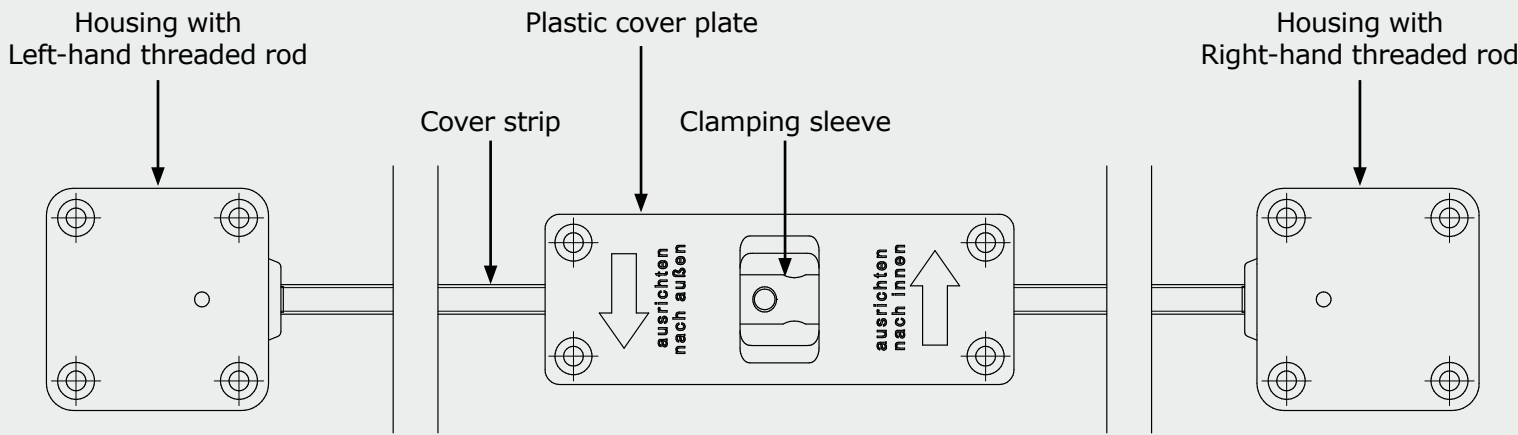


Length

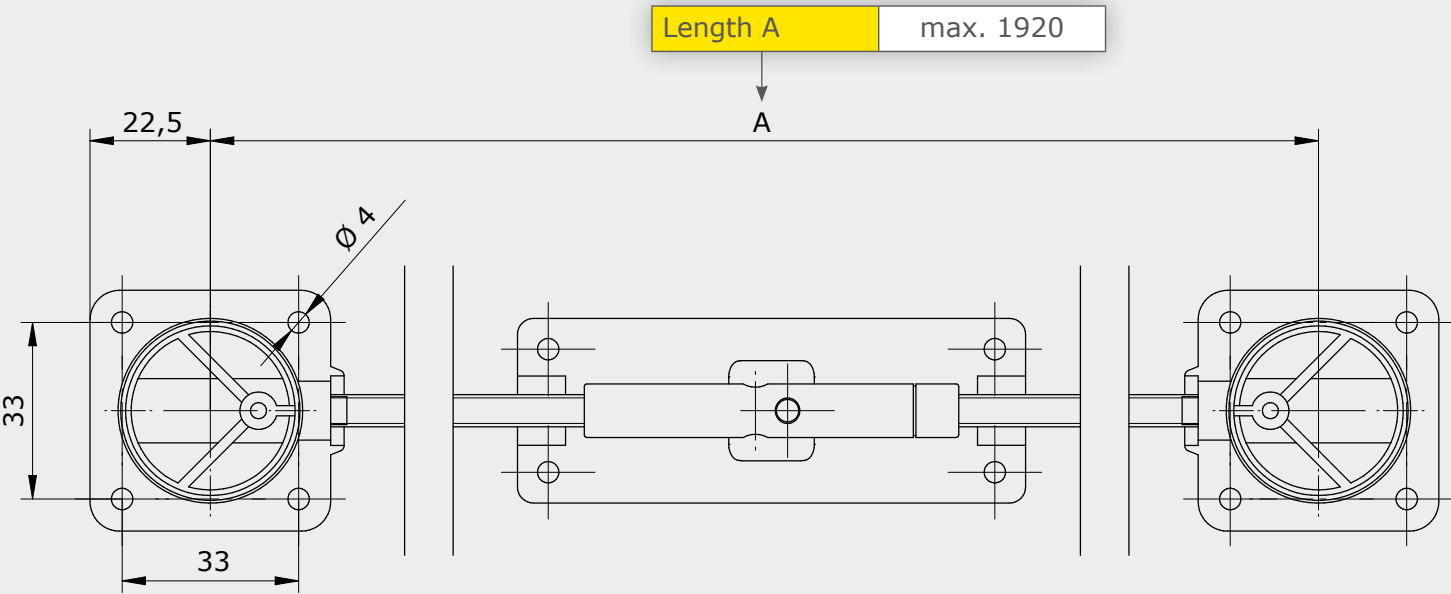


Features

- Supports the functionality of door fittings
- Form stability even with high stress
- Prevents warping of door leaves
- Straighten out warped or distorted doors
- Suitable for wooden and sliding doors

Drilling and milling

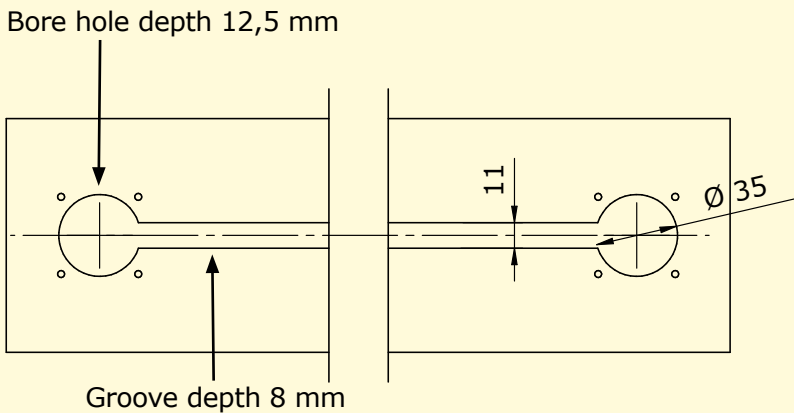

Set contents

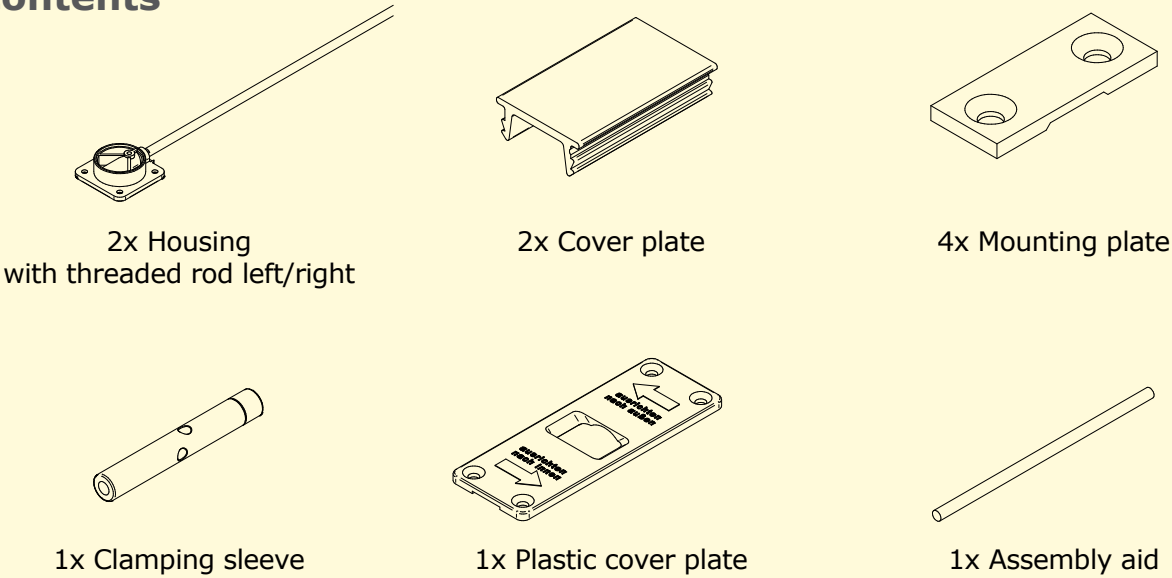

Assembly instruction

By means of the new alignment fitting you`ll be easily able to solve the problem of warping sliding doors. Doors beginning from a wood thickness of 16 mm and up to a height of 2600 mm will be stabilised or corrected by means of this alignment fitting.

Let the housing with the thread rods and sleeves into bore holes (Ø 35 mm and 12,5 mm deep) as well as into a continuous groove (11 mm large and 8 mm deep). Left thread rod and the end of the sleeve with groove in up wards direction. Fasten the housing. Drive in the cover strip and finally screw on the plastic cover plate. Align the door with the steel pin. The direction of rotation is indicated on the cover plate.

| Length       | Sets/Box | Box/Palett maximum | Sets/Palett maximum | Order number  |
|--------------|----------|--------------------|---------------------|---------------|
| individually | 25       | 21                 | 525                 | individually  |
| 1080         | 25       | 21                 | 525                 | 2045309011600 |
| 1920         | 25       | 21                 | 525                 | 2049509011600 |

Connecting fittings

Peanut® 1 \_\_\_\_\_ Page 114

Peanut® 2 \_\_\_\_\_ Page 116

Peanut® 2 Short \_\_\_\_\_ Page 118

Peanut® 3 \_\_\_\_\_ Page 120

Peanut® 3 Long \_\_\_\_\_ Page 122

Peanut® Cutters and drills \_\_\_\_\_ Page 124

Product


REME has taken over the distribution of products from the company Intelligent Fixings throughout Germany. The product portfolio includes connecting fittings which can be assembled partially without tools.

Intelligent Fixings have used the patent-pending technology of the original PEANUT® 1 to develop a range of dowel-like connectors, for use with high-speed production lines and hand-held routers. Since 2023 REME is the distribution partner of Intelligent Fixings for the German sales area.

Find out about the intelligent connection solutions now!




### Variants

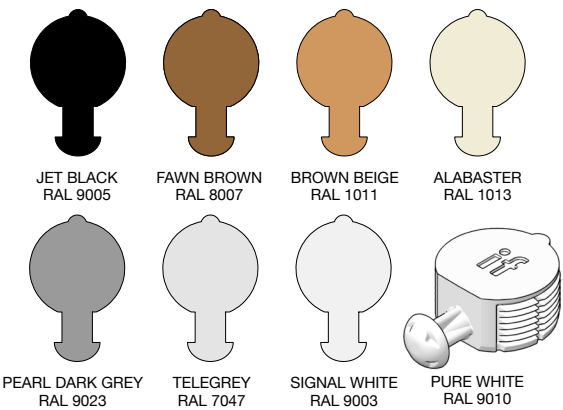


### Features

- Self-clinching
- One-component connection
- Creates a strong connection
- Quick and easy assembly
- Can be installed several times
- Available in various colors
- Material: glass-fiber reinforced plastic

### Applications

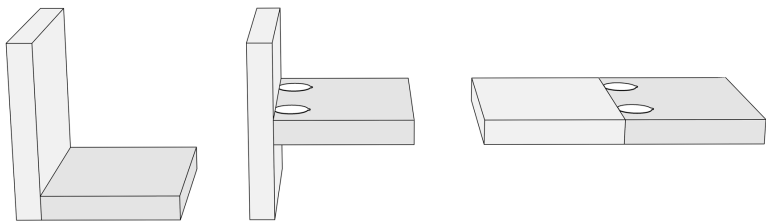

### Assembly instructions

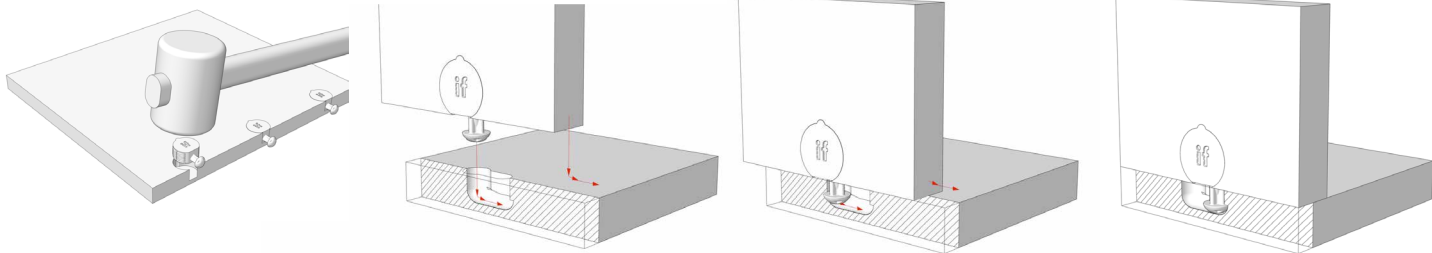

### Technical specifications

Component composition  
Glass-fiber reinforced plastic


Material thickness  
90° connection: >15,3 mm

Tolerance (Ø 25 mm hole)  
+0,1 mm und -0,25 mm


Tolerance (Cutter slot)  
+0,3 mm und -0,4 mm (depth)

| Product   | Color           | RAL Number | Pieces/Box | Order number  | Pieces/Box | Order number  |
|-----------|-----------------|------------|------------|---------------|------------|---------------|
| Peanut® 1 | Jet Black       | RAL 9005   | 200        | 2060009008111 | 1000       | 2060009008103 |
| Peanut® 1 | Fawn Brown      | RAL 8007   | 200        | 2060009008113 | 1000       | 2060009008105 |
| Peanut® 1 | Brown Beige     | RAL 1011   | 200        | 2060009008108 | 1000       | 2060009008116 |
| Peanut® 1 | Alabaster       | RAL 1013   | 200        | 2060009008107 | 1000       | 2060009008115 |
| Peanut® 1 | Pearl Dark Grey | RAL 9023   | 200        | 2060009008101 | 1000       | 2060009008109 |
| Peanut® 1 | Telegrey        | RAL 7047   | 200        | 2060009008106 | 1000       | 2060009008114 |
| Peanut® 1 | Signal White    | RAL 9003   | 200        | 2060009008104 | 1000       | 2060009008112 |
| Peanut® 1 | Pue White       | RAL 9010   | 200        | 2060009008102 | 1000       | 2060009008110 |

### Machining

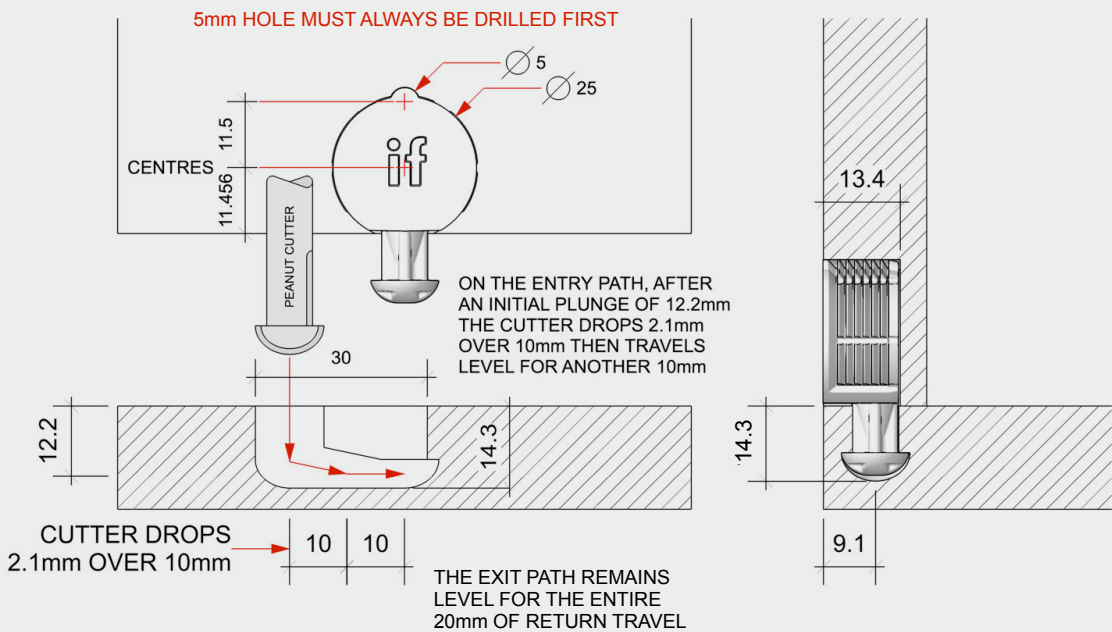


### Strength data

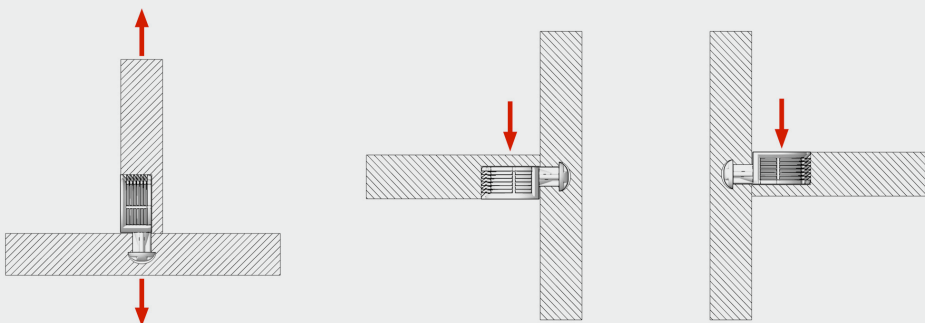


| Material                   | Tensile strength<br>1 component<br>(Figure A) | Shear strength<br>2 components<br>(Figure B) | Shear strength<br>2 components<br>(Figure C) |
|----------------------------|-----------------------------------------------|----------------------------------------------|----------------------------------------------|
| Particle board (18 mm MFC) | 750 N / 75 KG                                 | 1200 N / 120 KG                              | 650 N / 65 KG                                |
| MDF (18 mm)                | 950 N / 95 KG                                 | 1350 N / 135 KG                              | 950 N / 95 KG                                |
| Tested by                  |                                               |                                              |                                              |

Please note that the strength may vary depending on the material and quality of the material used.


## Variants

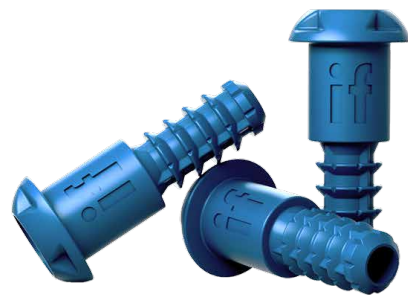

## Applications



## Assembly instructions

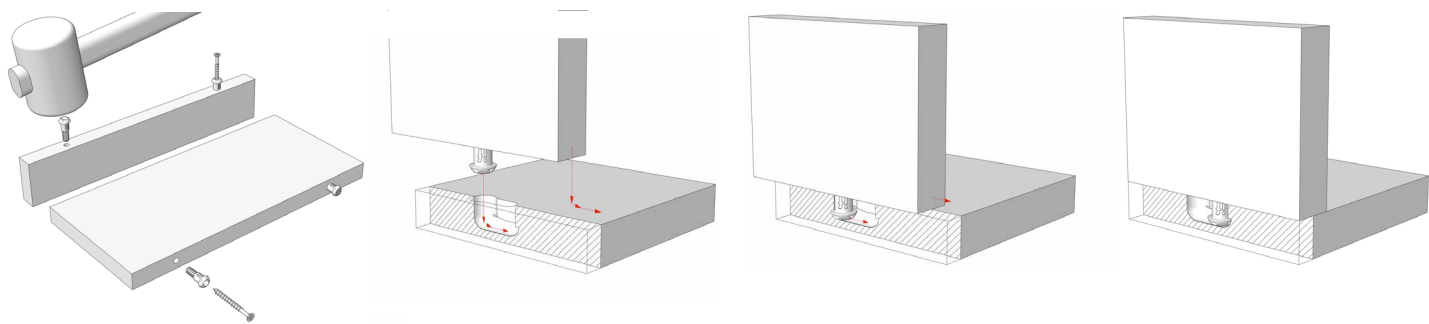

## Features

- Self-clinching
- One-component connection
- Ideal for drilling and insertion machines
- PEANUT Jig and Mini Jig compatible
- Creates a strong connection
- Quick and easy assembly
- Can be installed several times

## Technical specifications



Component composition  
Glass-fiber reinforced plastic

Material thickness  
90° connection: >15,3 mm


Tolerance (Peanut® milling)  
+0,3 mm und -0,4 mm (depth)

| Product   | Pieces/Box | Order number  | Pieces/Box | Order number  |
|-----------|------------|---------------|------------|---------------|
| Peanut® 2 | 200        | 2060009008201 | 1250       | 2060009008202 |

## Machining

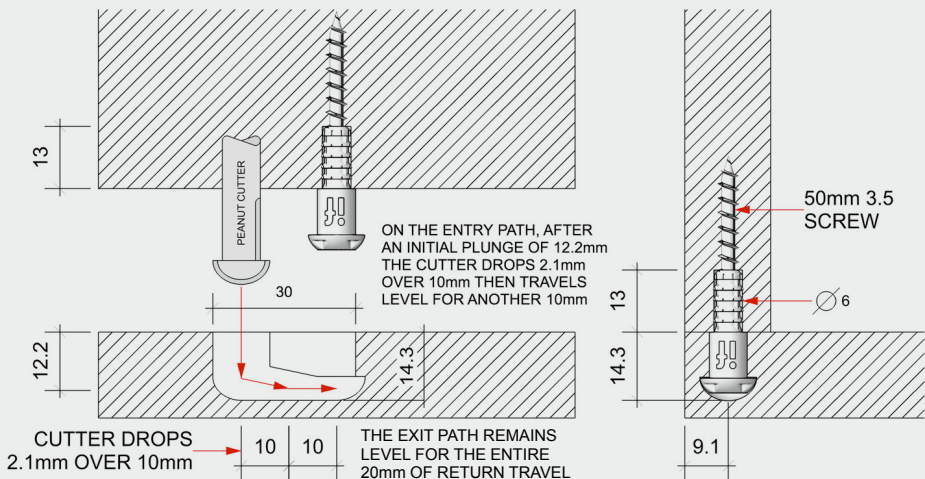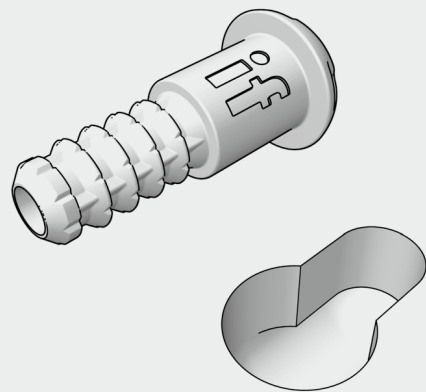

## Strength data

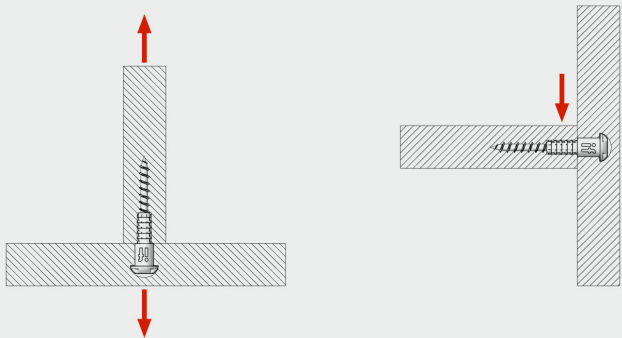


| Material                   | Tensile strength<br>1 component<br>(Figure A) | Shear strength<br>2 components<br>(Figure B) |
|----------------------------|-----------------------------------------------|----------------------------------------------|
| Particle board (18 mm MFC) | 900 N / 90 KG                                 | 670 N / 67 KG                                |
| MDF (18 mm)                | 1000 N / 100 KG                               | 930 N / 93 KG                                |
| Tested by                  |                                               |                                              |

Please note that the strength may vary depending on the material and quality of the material used.

### Variants




### Applications




### Assembly instructions

Example 1: 45° connection

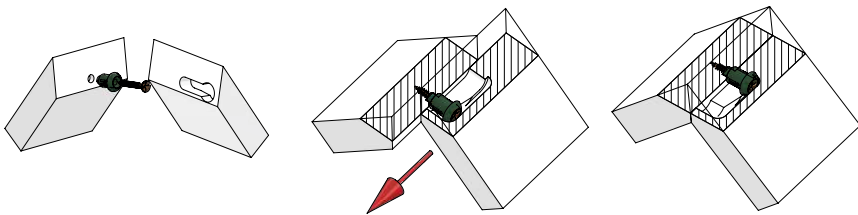

Example 2: Front on Front

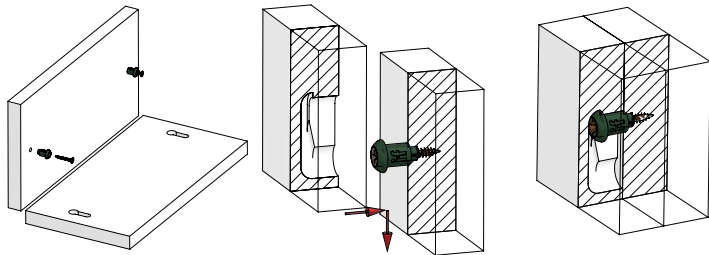

### Features

- Self-clinching
- One-component connection
- Ideal for drilling and insertion machines
- PEANUT Jig and Mini Jig compatible
- Creates a strong connection
- Quick and easy assembly

### Technical specifications



Component composition  
Glass-fiber reinforced plastic

Material thickness  
90° connection: >15,3 mm  
45° connection: >18,0 mm


Tolerance (Peanut® milling)  
+0,3 mm und -0,4 mm (depth)

| Product         | Pieces/Box | Order number  | Pieces/Box | Order number  |
|-----------------|------------|---------------|------------|---------------|
| Peanut® 2 Short | 200        | 2060009008203 | 1250       | 2060009008204 |

### Machining

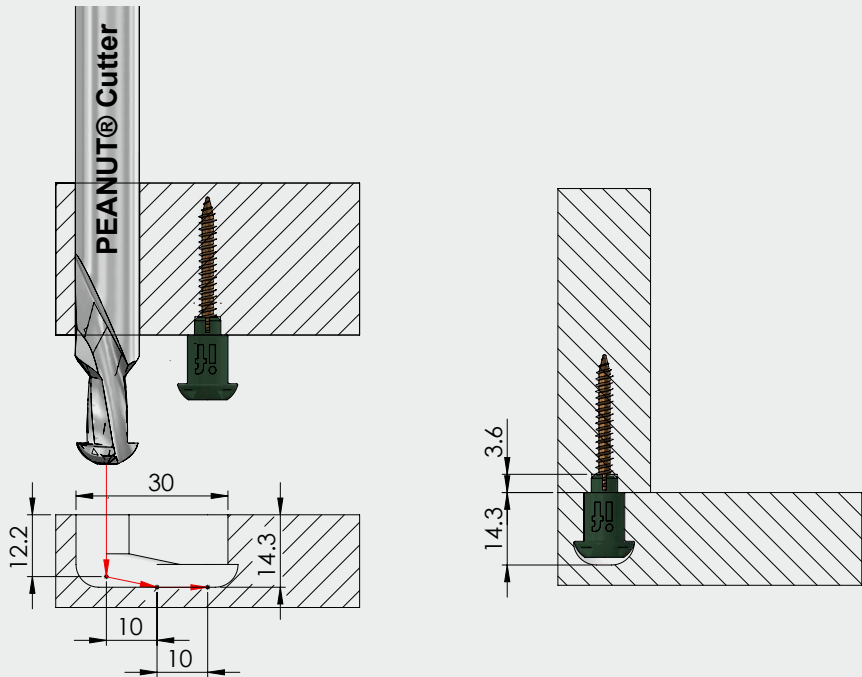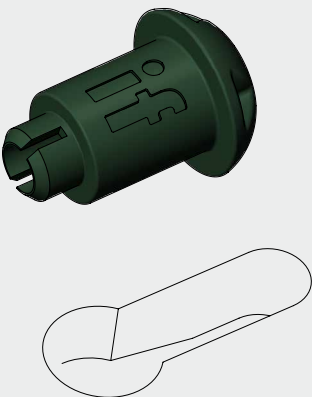

### Strength data

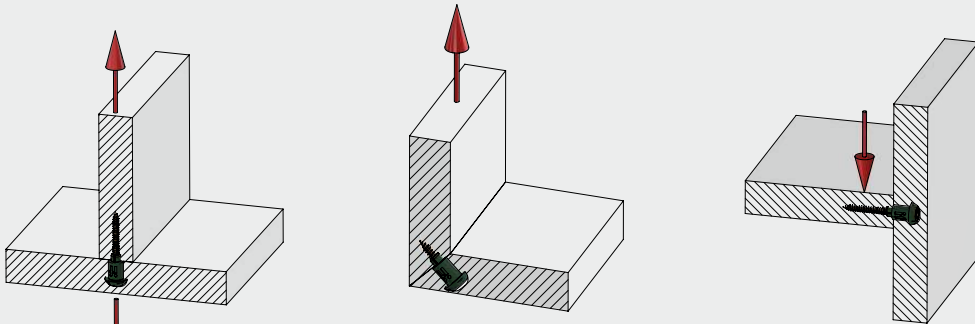


| Material                   | Tensile strength<br>1 component<br>(Figure A) | Shear strength<br>2 components<br>(Figure B) | Shear strength<br>2 components<br>(Figure C) |
|----------------------------|-----------------------------------------------|----------------------------------------------|----------------------------------------------|
| Particle board (18 mm MFC) | 860 N / 86 KG                                 | 460 N / 46 KG                                | 670 N / 67 KG                                |
| MDF (18 mm)                | 1010 N / 101 KG                               | 650 N / 65 KG                                | 930 N / 93 KG                                |
| Tested by                  |                                               |                                              |                                              |

Please note that the strength may vary depending on the material and quality of the material used.

Variants




Applications




Assembly instructions

Example 1: 45° connection

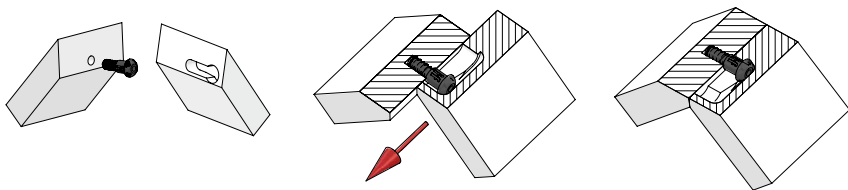

Example 2: Front on Front

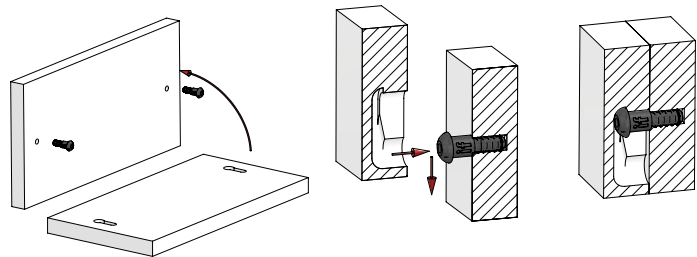

Features

- Self-clinching
- One-component connection
- Creates a strong connection
- Ideal for drilling and insertion machines
- Quick and easy assembly
- Can be installed several times

Technical specifications



Component composition  
Glass-fiber reinforced plastic

Material thickness  
90° connection: >15,3 mm  
45° connection: >18,0 mm


Tolerance (Peanut® milling)  
+0,3 mm und -0,4 mm (depth)

| Product   | Pieces/Box | Order number  | Pieces/Box | Ordner number |
|-----------|------------|---------------|------------|---------------|
| Peanut® 3 | 200        | 2060009008301 | 1250       | 2060009008302 |

Machining

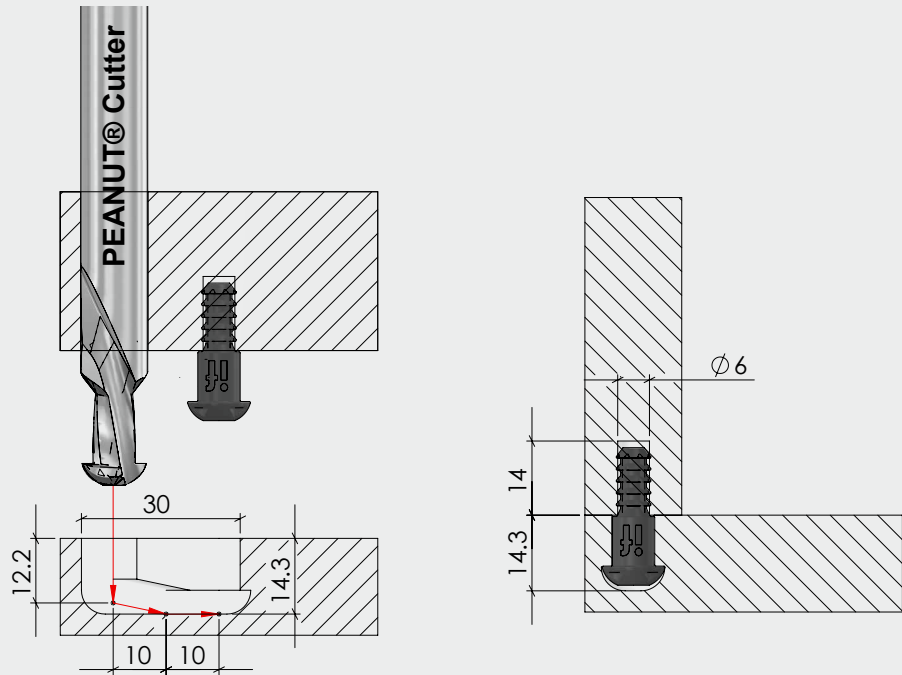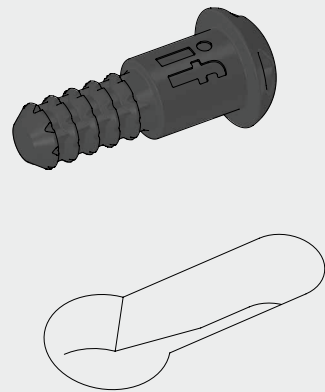


Strength data

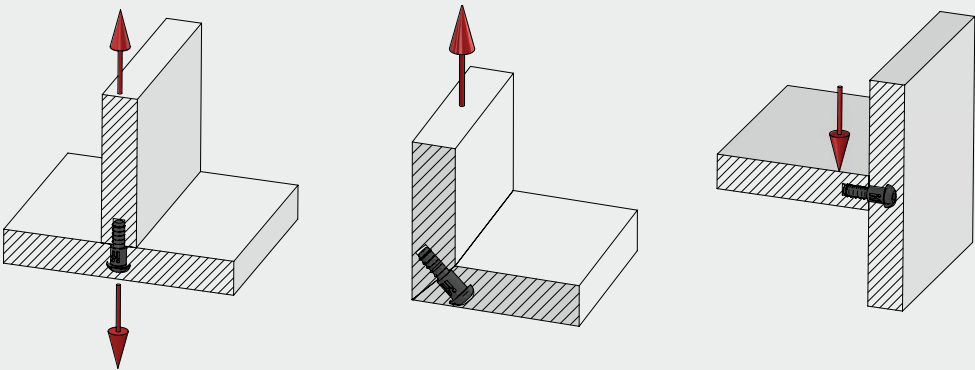


| Material                   | Tensile strength<br>1 component<br>(Figure A) | Shear strength<br>2 components<br>(Figure B) | Shear strength<br>2 components<br>(Figure C) |
|----------------------------|-----------------------------------------------|----------------------------------------------|----------------------------------------------|
| Particle board (18 mm MFC) | 900 N / 90 KG                                 | 600 N / 60 KG                                | 650 N / 65 KG                                |
| MDF (18 mm)                | 1050 N / 105 KG                               | 670 N / 67 KG                                | 920 N / 92 KG                                |
| Tested by                  | CATAS<br>Testing Certification Research       | CATAS<br>Testing Certification Research      | if make<br>stronger<br>connections           |

Please note that the strength may vary depending on the material and quality of the material used.


Variantes

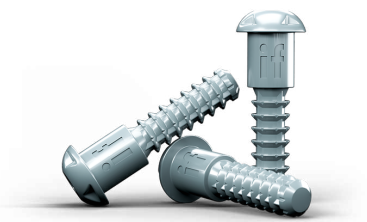

Applications



Assembly instructions

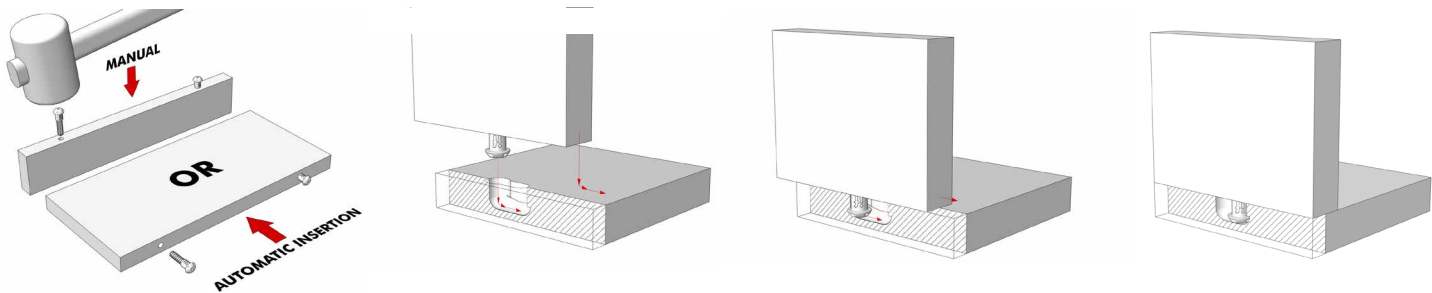

Features

- Self-clinching
- One-component connection
- Creates a strong connection
- Ideal for drilling and insertion machines
- Quick and easy assembly
- Can be installed several times

Technical specifications



Component composition  
Glass-fiber reinforced plastic

Material thickness  
90° connection: >15,3 mm  
45° connection: >18,0 mm


Tolerance (Peanut® milling)  
+0,3 mm und -0,4 mm (depth)

| Product        | Pieces/Box | Order number  | Pieces/Box | Order number  |
|----------------|------------|---------------|------------|---------------|
| Peanut® 3 Long | 150        | 2060009008303 | 1000       | 2060009008304 |

Machining

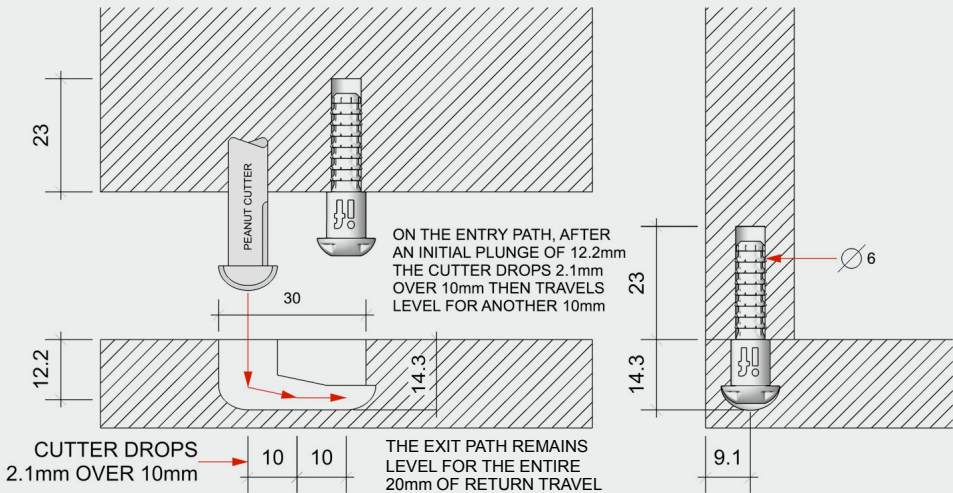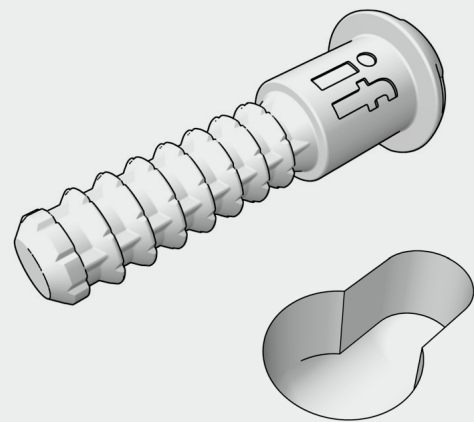

Strength data

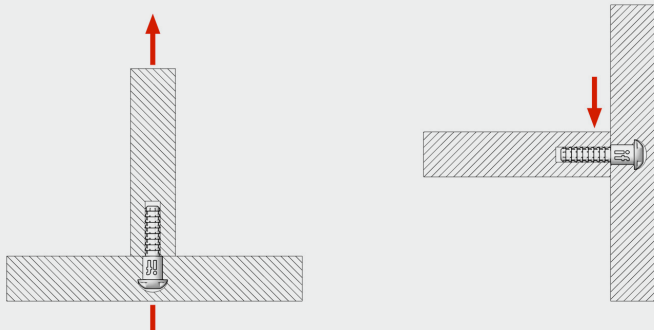

| Material                   | Tensile strength<br>1 component<br>(Figure A)                                                                           | Shear strength<br>2 components<br>(Figure B)                                          |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Particle board (18 mm MFC) | 900 N / 90 KG                                                                                                           | 800 N / 80 KG                                                                         |
| MDF (18 mm)                | 1050 N / 105 KG                                                                                                         | 1300 N / 130 KG                                                                       |
| Tested by                  | <br>Testing Certification Research |  |

Please note that the strength may vary depending on the material and quality of the material used.

Cutter



Features


- Required for all PEANUT® components
- Creates the PEANUT® slot
- 3 shank sizes (1/2 inch, 12 mm, 8 mm)
- Max. 14,000 rpm
- Cannot be resharpened

The PEANUT cutter is a T-shaped cutter with a curved head and produces the PEANUT slots. The PEANUT cutter creates a keyhole groove that has an undercut. The PEANUT component is inserted into the slot and slides along the undercut to join two panels together.

The PEANUT slot is required for all PEANUT connectors. The cutter is precision milled from 1/2" solid carbide rods and cannot be reground. To produce an 8 mm or 12 mm PEANUT cutter, the 1/2" PEANUT cutter is ground to the correct size in a second operation.

| Product                    | Pieces/Box | Order number  |
|----------------------------|------------|---------------|
| PEANUT® Cutter 1/2" Shank  | 1          | 2060009008020 |
| PEANUT® Cutter 8 mm Shank  | 1          | 2060009008002 |
| PEANUT® Cutter 12 mm Shank | 1          | 2060009008001 |

Dimensions

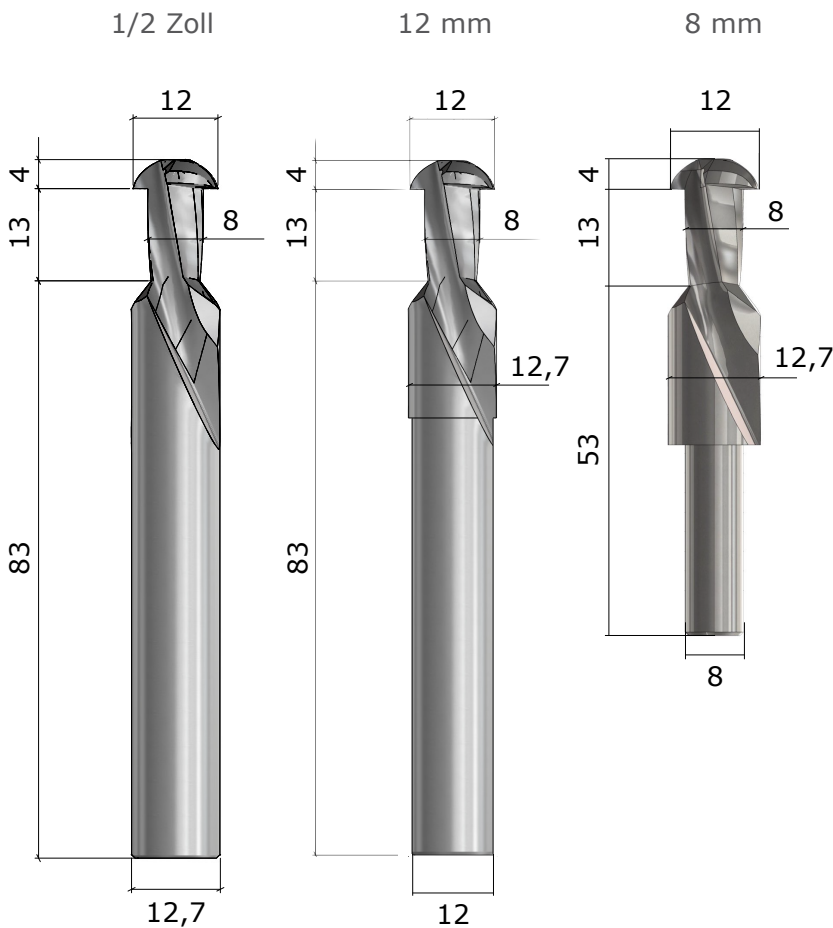

Drill pack



Features


- Required for the PEANUT® 1 system
- 24.9 mm drill bit and 5 mm drill bit
- Material: Solid carbide

The PEANUT 1 Drill Pack consists of a 24.9 mm and a 5 mm solid carbide CNC drill bit. The drill pack is used to make the holes for the PEANUT 1 connector. To make the PEANUT 1 holes, the 5 mm hole must be drilled before the 25 mm hole. This ensures a perfect recess for the PEANUT 1. The 24.9 mm CNC drill bit is designed to create a hole that fits the PEANUT 1 connector perfectly. A 25 mm CNC drill can still be used to achieve a near perfect fit.

Dimensions



| Product              | Pieces/Box | Order number  |
|----------------------|------------|---------------|
| PEANUT® 1 Drill Pack | 1          | 2060009008003 |

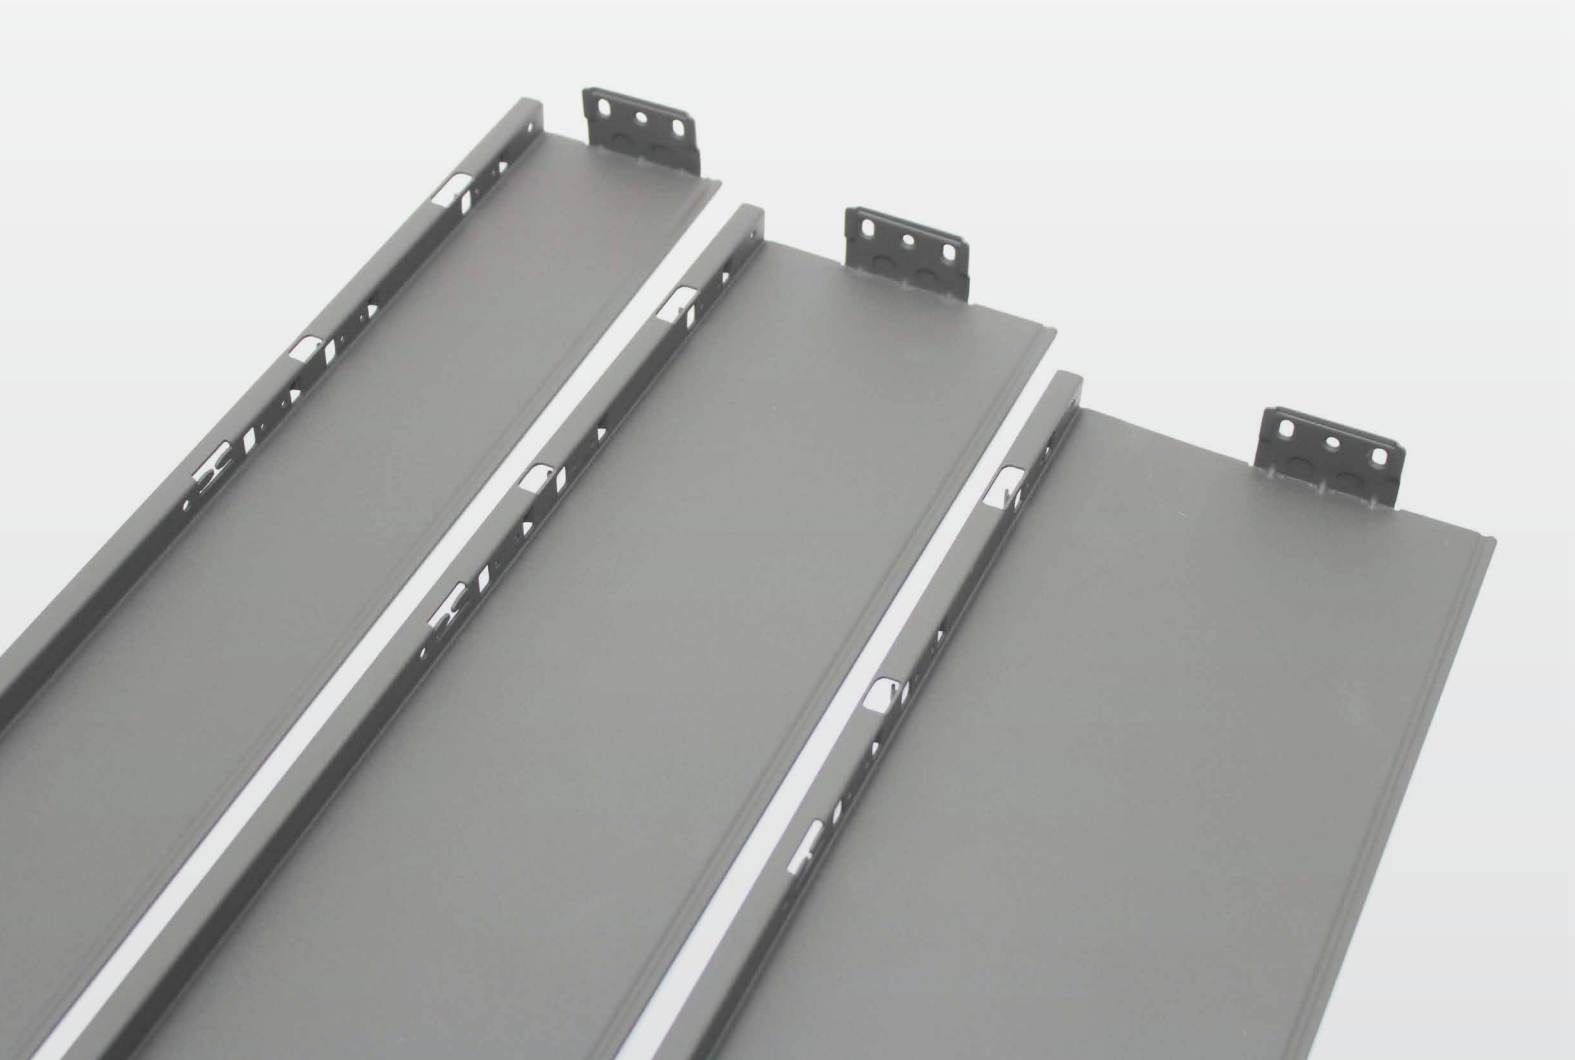

## Frame runner system

Bottom thickness up to 14 mm, back panel continuous \_\_\_\_\_ Page 128

Bottom thickness 14–18 mm, bottom continuous \_\_\_\_\_ Page 134

### Product

The drawer runner systems ensure precise guidance and high stability of drawers. These systems are not only functional and lightweight, but also make a significant contribution to the comfort and durability of furniture and constructions. The drawer system can be combined with the Perfect partial-extension runner and the Extreme full-extension runner.

The scope of delivery per set always includes one left and one right single-panel frame with back panel holder and front attachment as well as a pair of cover caps.

### Ordering information

You can choose the drawer runner systems with the following runners

#### Single Extension Perfect

- Soft-Close and Plug-on assembly
- Stub, Soft-Close, Plug-on assembly and Lift Lock
- Offset hanging tab

#### Full Extension Extreme

- Soft-Close and Plug-on assembly

# Frame runner system

Bottom thickness up to 14 mm, back panel continuous



80



## 3D view




## Cutting dimensions

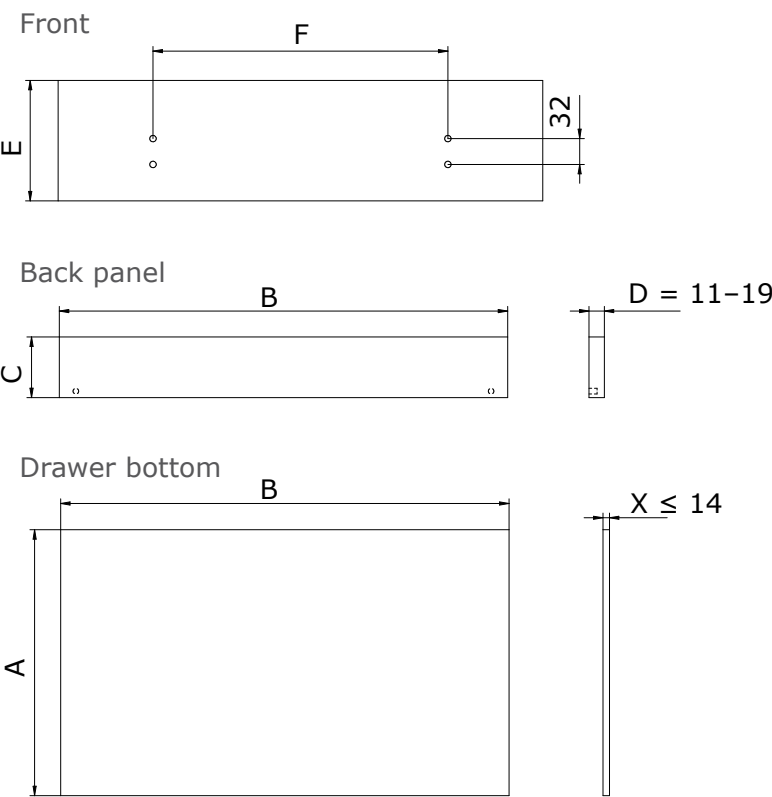


## Calculations

- A = Nominal length - Back panel width (D) - 2 mm
- B = Inside cabinet width - 14 mm
- C = Frame height - 5 mm
- D = Back panel width = 11-19 mm
- E = Front height
- F = Inside cabinet width - 53 mm

## Installation dimensions front with Perfect

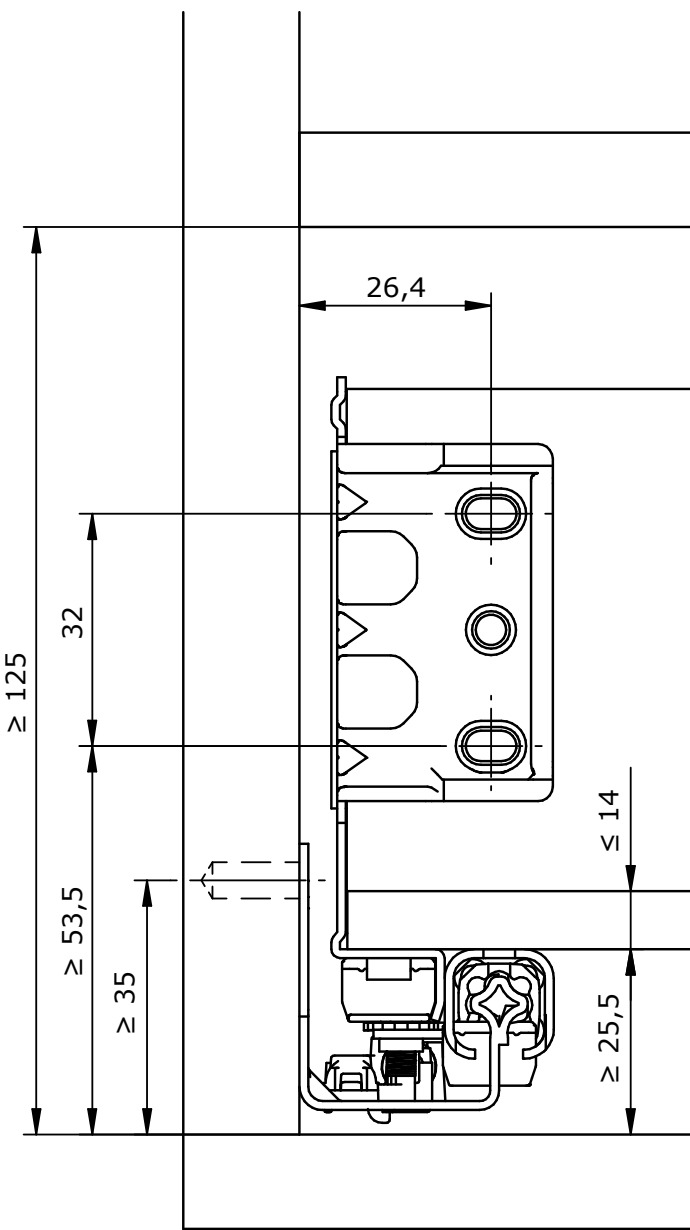

## Installation dimensions back panel with Perfect

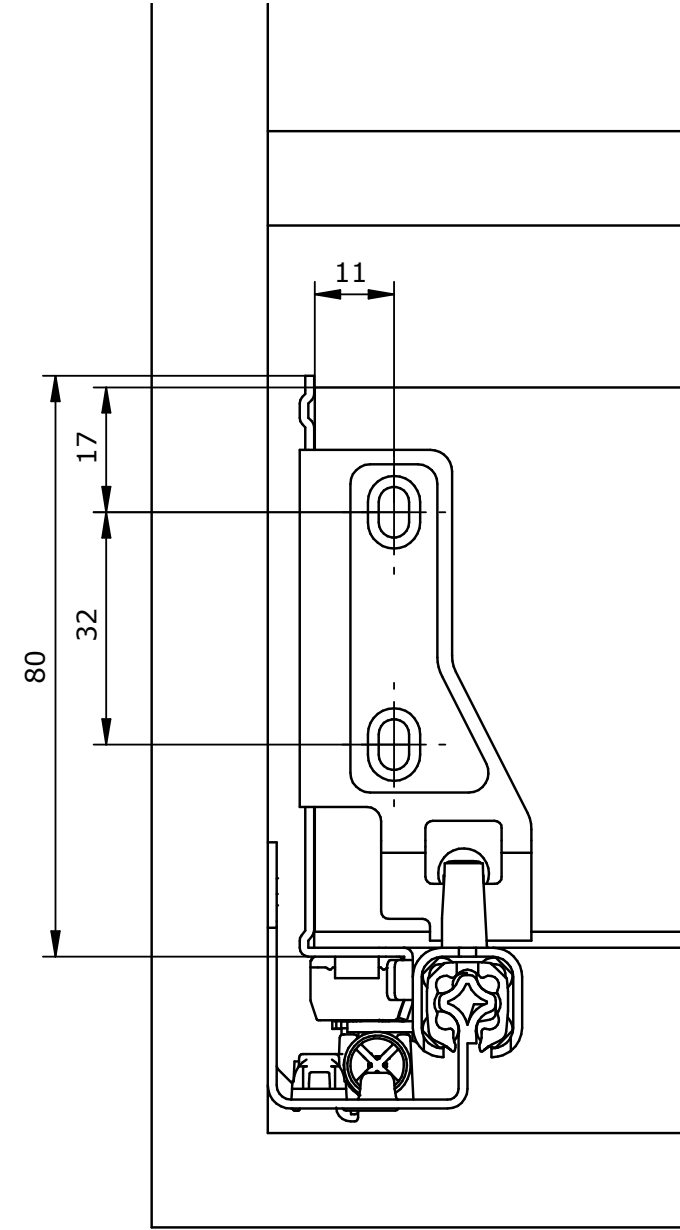

## Features

- Colors: grey and white
- Areas of application: Drawers and front pull-outs
- Material: steel
- Assembly: for screwing

## Optional features



- Nominal length: 250 – 550 mm
- Frame height: 80 mm, 120 mm, 150 mm
- Inside cabinet width
- Single Extension Perfect (Load capacity 25 kg)
- Full Extension Extreme (Load capacity 30 kg)

| Frame height<br>in mm | Nominal length<br>in mm | Sets/Box | Order number<br>Frames gray | Order number<br>Frames white |
|-----------------------|-------------------------|----------|-----------------------------|------------------------------|
| 80                    | 250                     | 1        | 2060009008348               | 2060009008349                |
| 80                    | 300                     | 1        | 2060009008354               | 2060009008355                |
| 80                    | 350                     | 1        | 2060009008360               | 2060009008361                |
| 80                    | 400                     | 1        | 2060009008366               | 2060009008367                |
| 80                    | 450                     | 1        | 2060009008372               | 2060009008373                |
| 80                    | 500                     | 1        | 2060009008378               | 2060009008379                |
| 80                    | 550                     | 1        | 2060009008384               | 2060009008385                |

3D view




Cutting dimensions

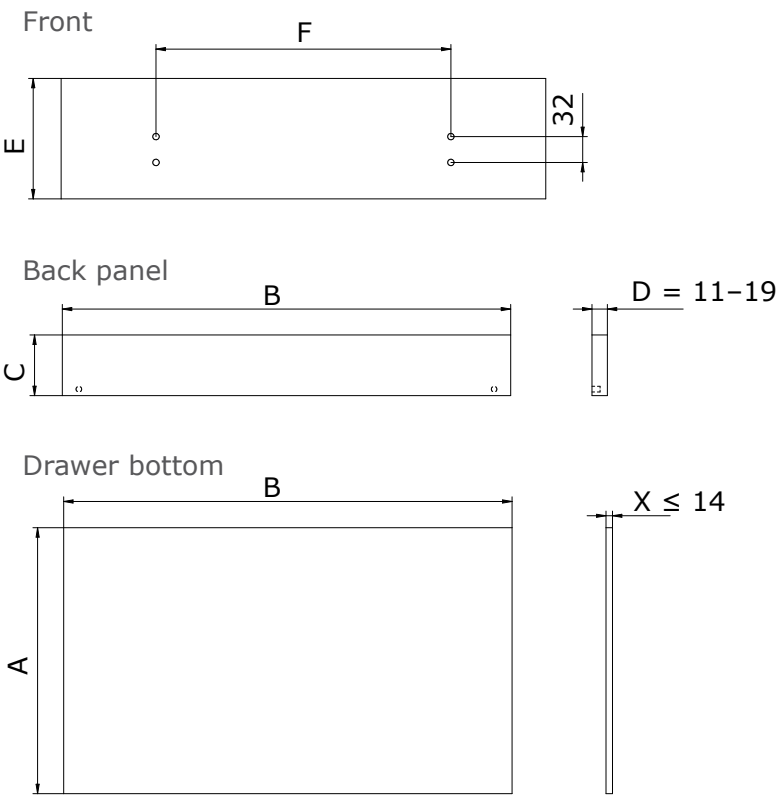


Calculations

- A = Nominal length - Back panel width (D) - 2 mm
- B = Inside cabinet width - 14 mm
- C = Frame height - 5 mm
- D = Back panel width = 11-19 mm
- E = Front height
- F = Inside cabinet width - 53 mm

Installation dimensions front with Perfect

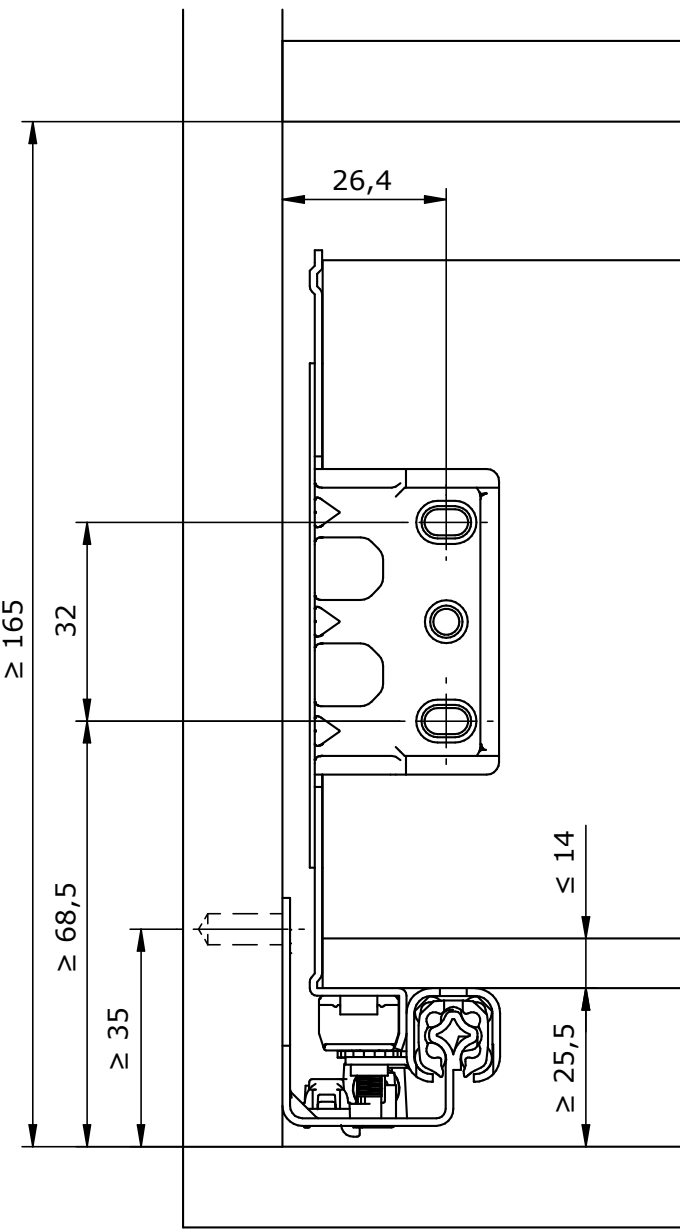

Installation dimensions back panel with Perfect

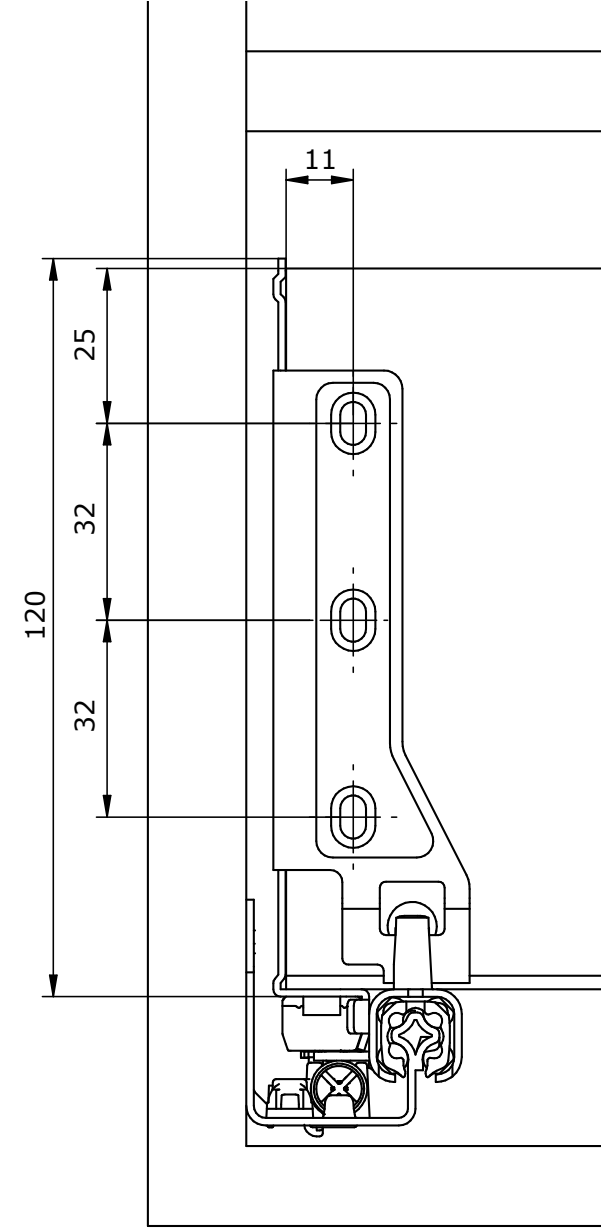

Features

- Colors: grey and white
- Areas of application: Drawers and front pull-outs
- Material: steel
- Assembly: for screwing

Optional features

- Nominal length: 250 – 550 mm
- Frame height: 80 mm, 120 mm, 150 mm
- Inside cabinet width
- Single Extension Perfect (Load capacity 25 kg)
- Full Extension Extreme (Load capacity 30 kg)

| Frame height<br>in mm | Nominal length<br>in mm | Sets/Box | Order number<br>Frames gray | Order number<br>Frames white |
|-----------------------|-------------------------|----------|-----------------------------|------------------------------|
| 120                   | 250                     | 1        | 2060009008350               | 2060009008351                |
| 120                   | 300                     | 1        | 2060009008356               | 2060009008357                |
| 120                   | 350                     | 1        | 2060009008362               | 2060009008363                |
| 120                   | 400                     | 1        | 2060009008368               | 2060009008369                |
| 120                   | 450                     | 1        | 2060009008374               | 2060009008375                |
| 120                   | 500                     | 1        | 2060009008380               | 2060009008381                |
| 120                   | 550                     | 1        | 2060009008386               | 2060009008387                |

# Frame runner system

Bottom thickness up to 14 mm, back panel continuous



150



### 3D view




### Cutting dimensions

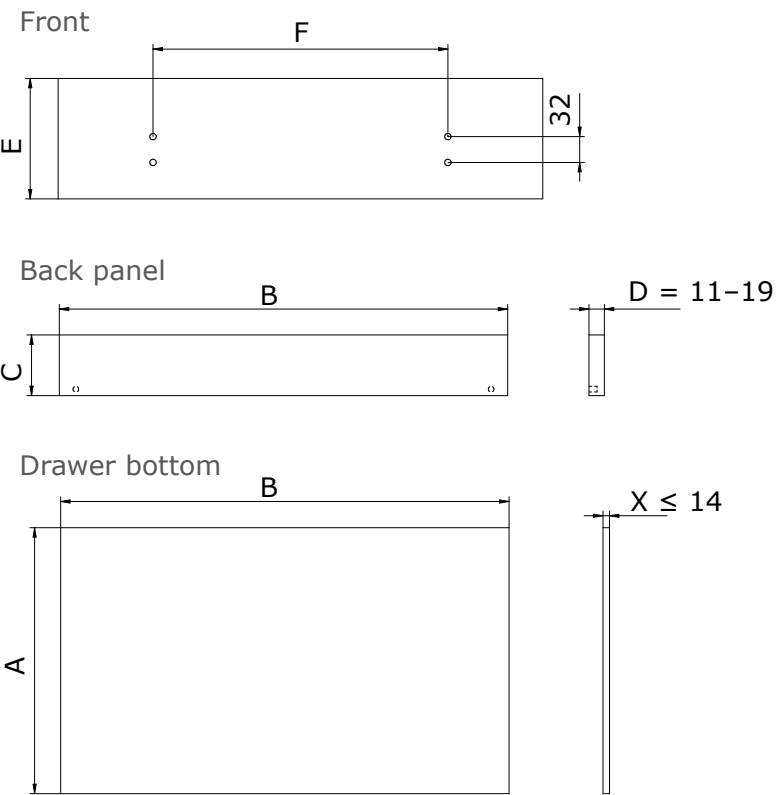


### Calculations

- A = Nominal length - Back panel width (D) - 2 mm
- B = Inside cabinet width - 14 mm
- C = Frame height - 5 mm
- D = Back panel width = 11-19 mm
- E = Front height
- F = Inside cabinet width - 53 mm

### Installation dimensions front with Perfect

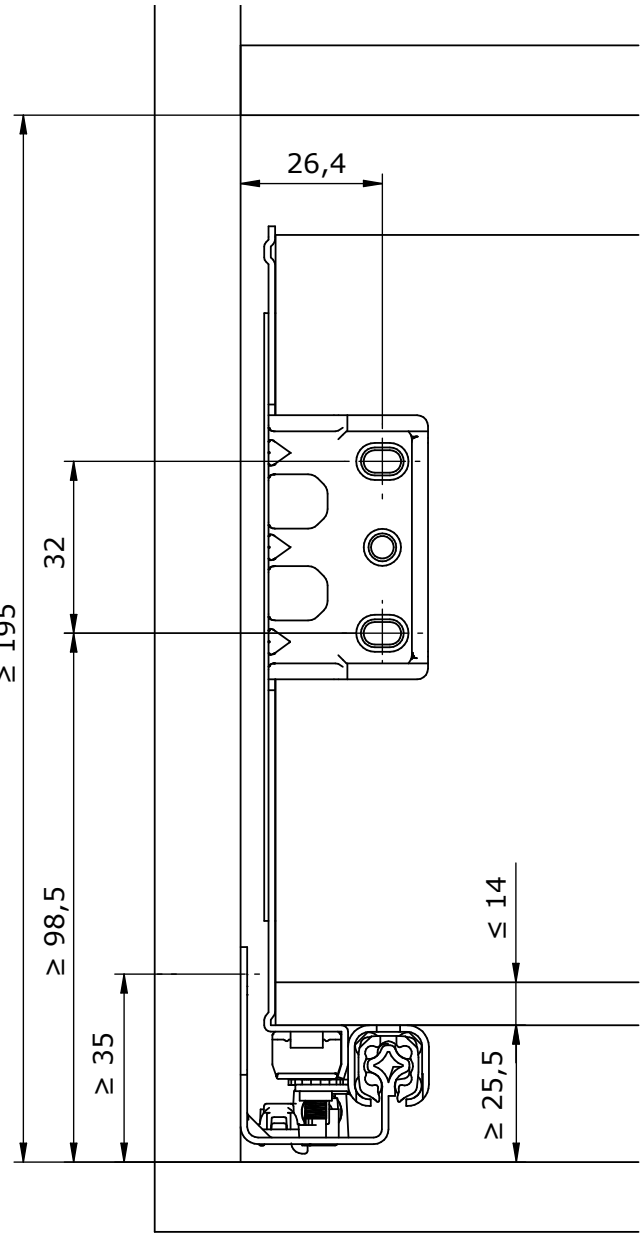

### Installation dimensions back panel with Perfect

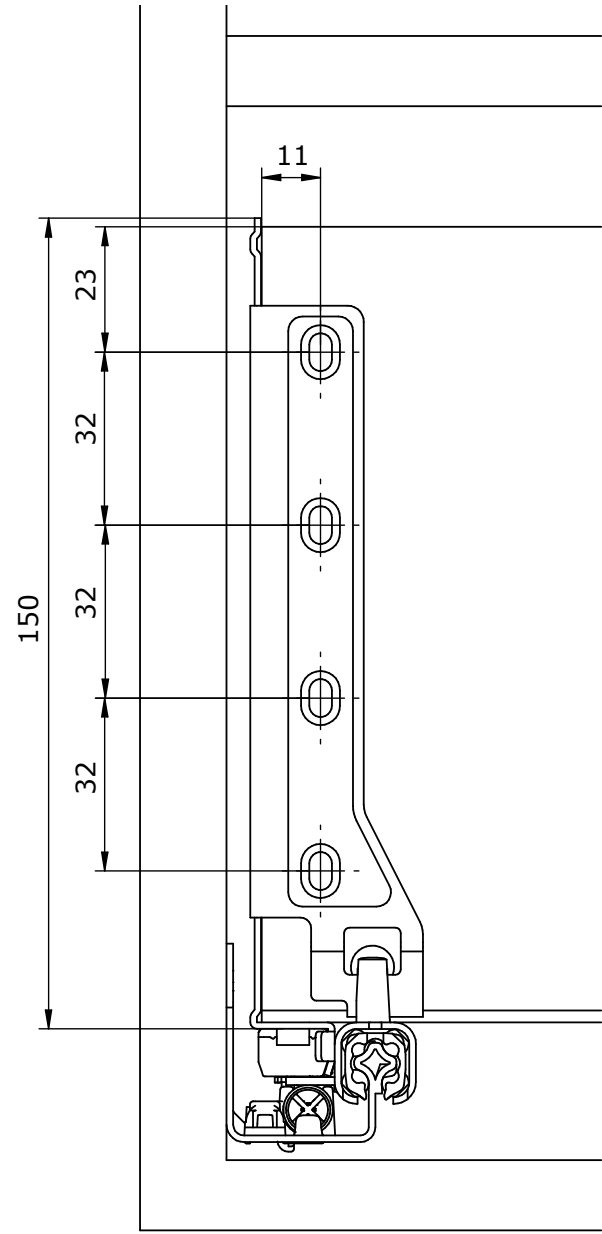

### Features


- Colors: grey and white
- Areas of application: Drawers and front pull-outs
- Material: steel
- Assembly: for screwing

### Optional features


- Nominal length: 250 – 550 mm
- Frame height: 80 mm, 120 mm, 150 mm
- Inside cabinet width
- Single Extension Perfect (Load capacity 25 kg)
- Full Extension Extreme (Load capacity 30 kg)

| Frame height<br>in mm | Nominal length<br>in mm | Sets/Box | Order number<br>Frames gray | Order number<br>Frames white |
|-----------------------|-------------------------|----------|-----------------------------|------------------------------|
| 150                   | 250                     | 1        | 2060009008352               | 2060009008353                |
| 150                   | 300                     | 1        | 2060009008358               | 2060009008359                |
| 150                   | 350                     | 1        | 2060009008364               | 2060009008365                |
| 150                   | 400                     | 1        | 2060009008370               | 2060009008371                |
| 150                   | 450                     | 1        | 2060009008376               | 2060009008377                |
| 150                   | 500                     | 1        | 2060009008382               | 2060009008383                |
| 150                   | 550                     | 1        | 2060009008388               | 2060009008389                |

3D view

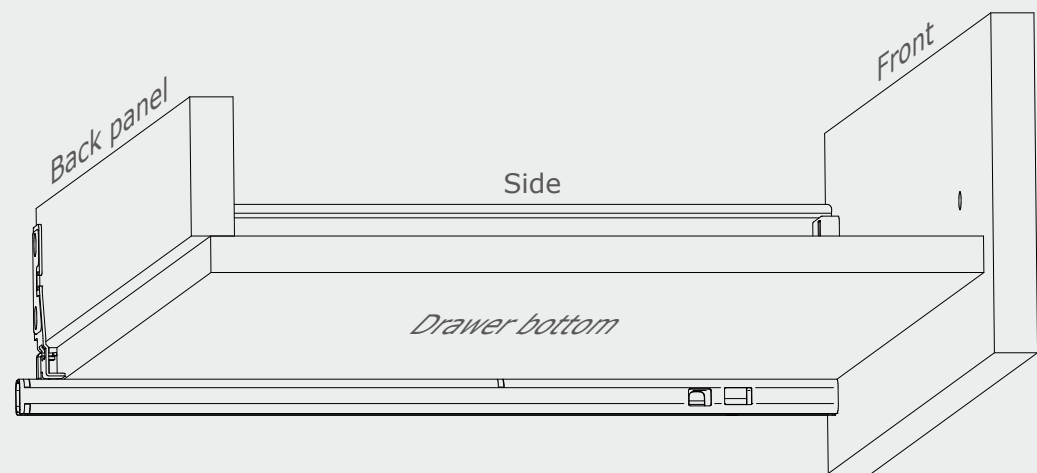


Cutting dimensions

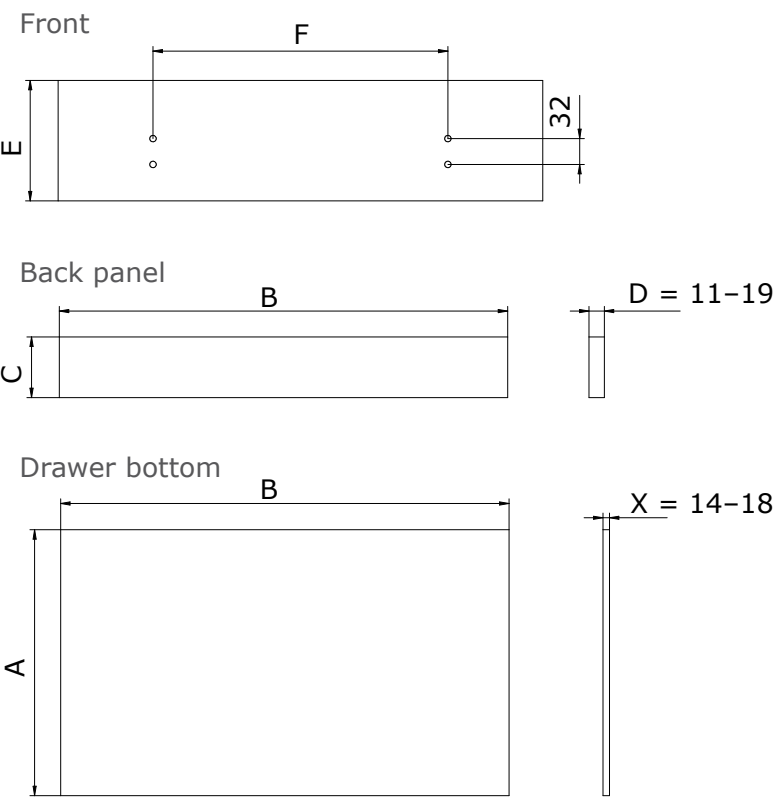


Calculations

- A = Nominal length - 10 mm
- B = Inside cabinet width - 14 mm
- C = Frame height - Bottom thickness (X) - 3 mm
- D = Back panel width = 11–19 mm
- E = Front height
- F = Inside cabinet width - 53 mm

Installation dimensions front with Perfect

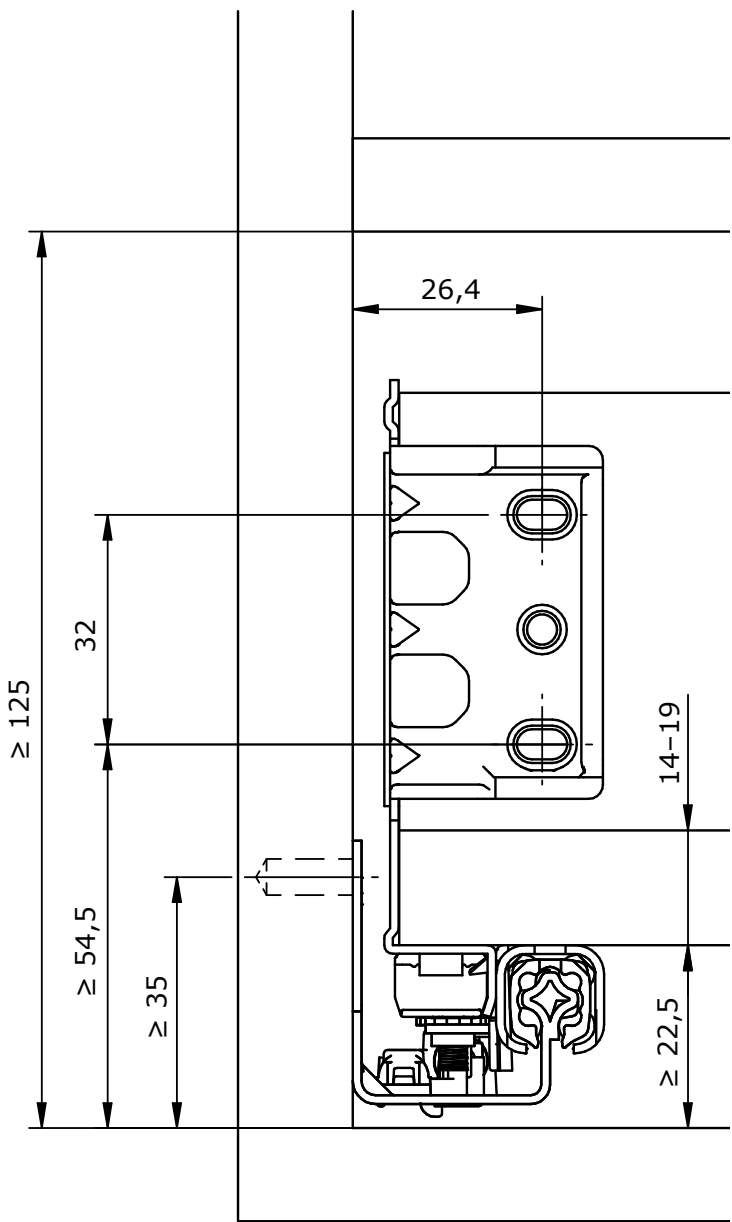

Installation dimensions back panel with Perfect

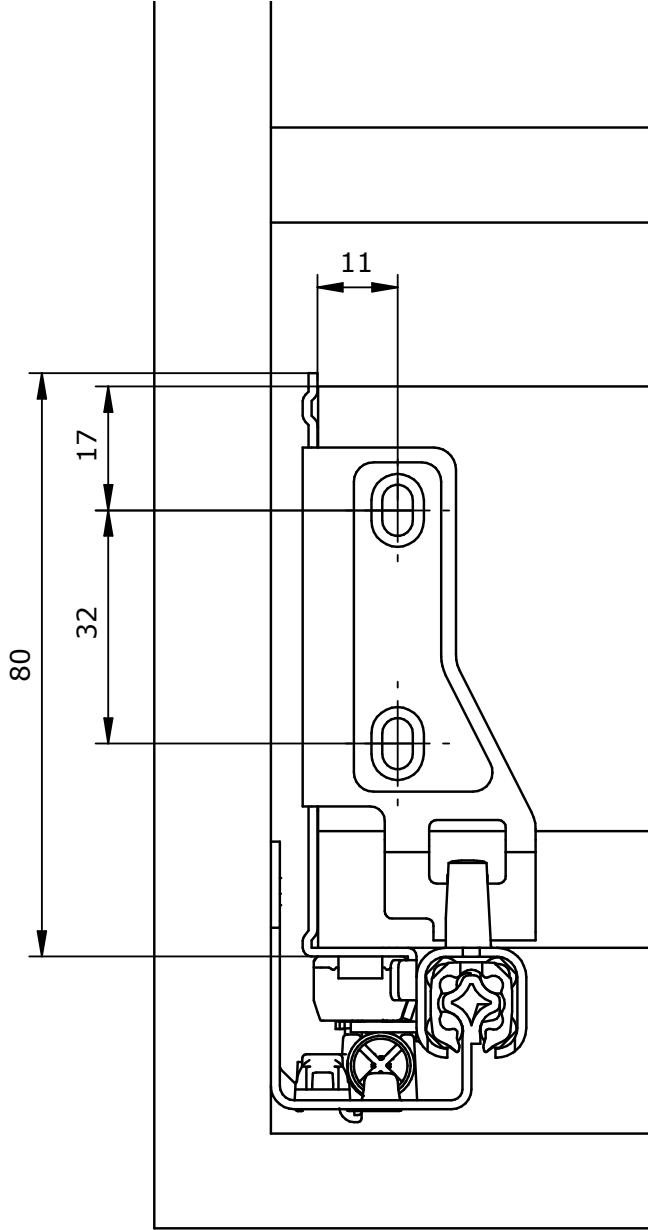

Features


- Colors: gray and white
- Areas of application: Drawers and front pull-outs
- Material: steel
- Assembly: for screwing

Optional features


- Nominal length: 250 – 550 mm
- Frame height: 80 mm, 120 mm, 150 mm
- Inside cabinet width
- Single Extension Perfect (Load capacity 25 kg)
- Full Extension Extreme (Load capacity 30 kg)

| Frame height<br>in mm | Nominal length<br>in mm | Sets/Box | Order number<br>Frames gray | Order number<br>Frames white |
|-----------------------|-------------------------|----------|-----------------------------|------------------------------|
| 80                    | 250                     | 1        | 2060009008348               | 2060009008349                |
| 80                    | 300                     | 1        | 2060009008354               | 2060009008355                |
| 80                    | 350                     | 1        | 2060009008360               | 2060009008361                |
| 80                    | 400                     | 1        | 2060009008366               | 2060009008367                |
| 80                    | 450                     | 1        | 2060009008372               | 2060009008373                |
| 80                    | 500                     | 1        | 2060009008378               | 2060009008379                |
| 80                    | 550                     | 1        | 2060009008384               | 2060009008385                |

3D view

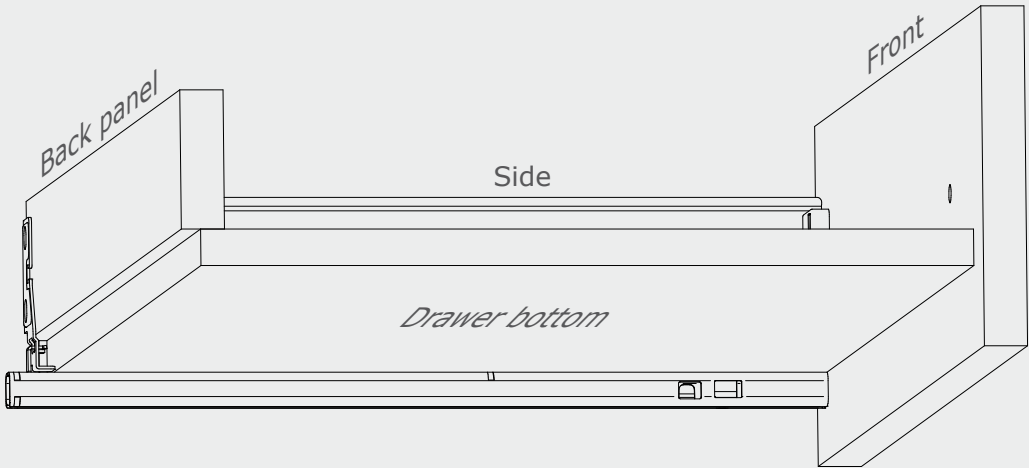

Cutting dimensions

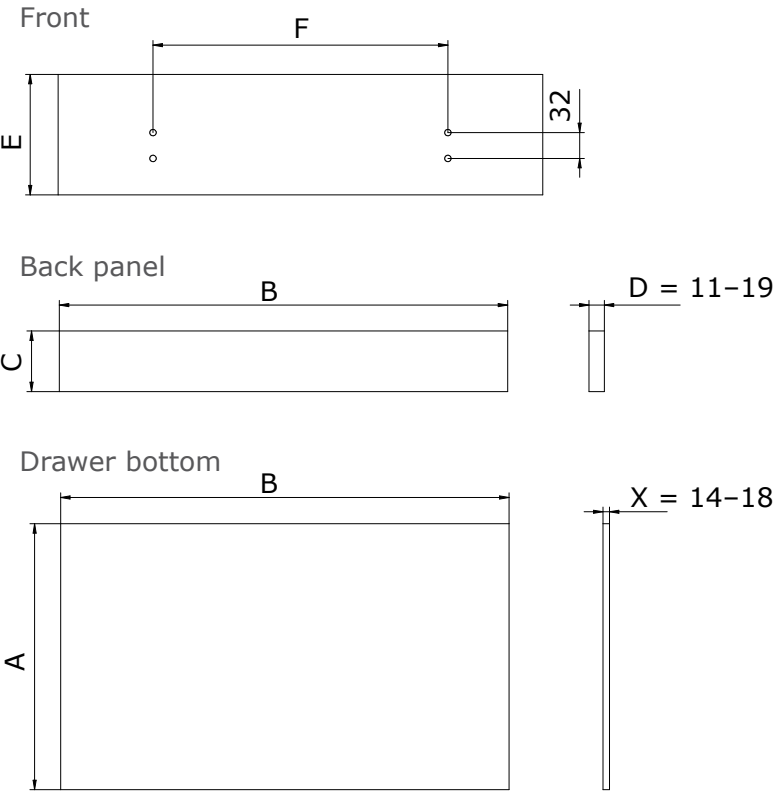

Calculations

- A = Nominal length - 10 mm
- B = Inside cabinet width - 14 mm
- C = Frame height - Bottom thickness (X) - 3 mm
- D = Back panel width = 11–19 mm
- E = Front height
- F = Inside cabinet width - 53 mm


Features

- Colors: gray and white
- Areas of application: Drawers and front pull-outs
- Material: steel
- Assembly: for screwing


Optional features

- Nominal length: 250 – 550 mm
- Frame height: 80 mm, 120 mm, 150 mm
- Inside cabinet width
- Single Extension Perfect (Load capacity 25 kg)
- Full Extension Extreme (Load capacity 30 kg)

Installation dimensions front with Perfect

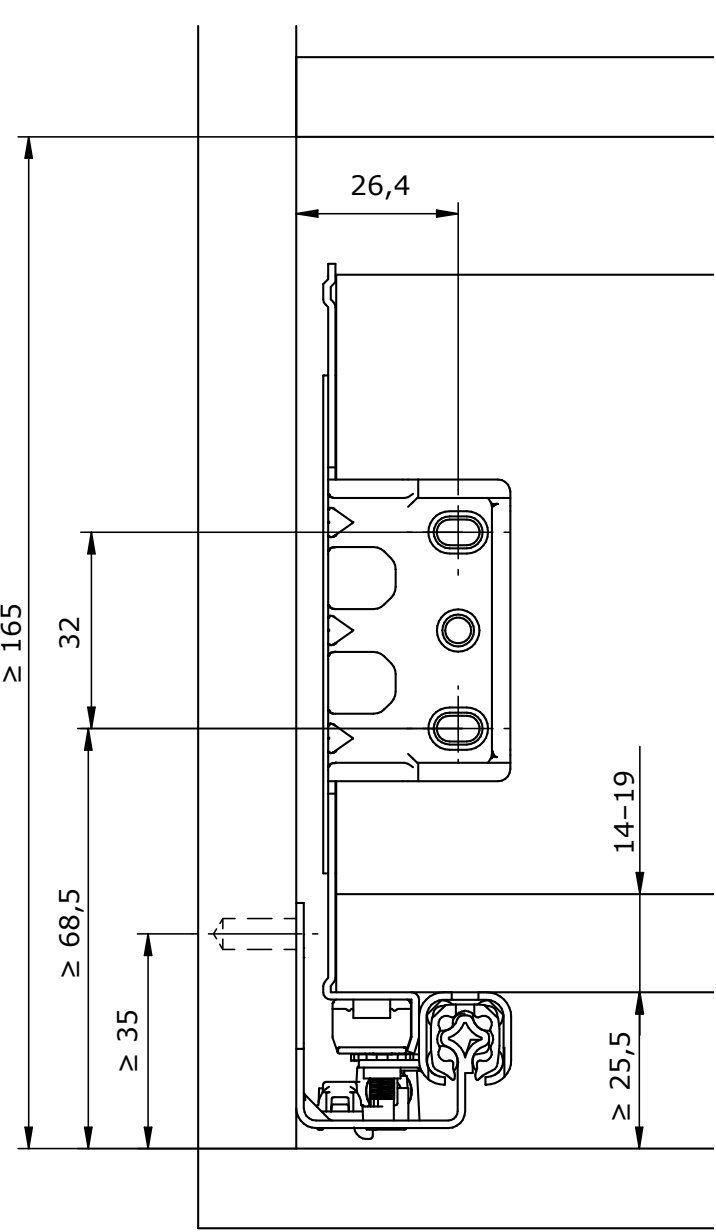


Installation dimensions back panel with Perfect

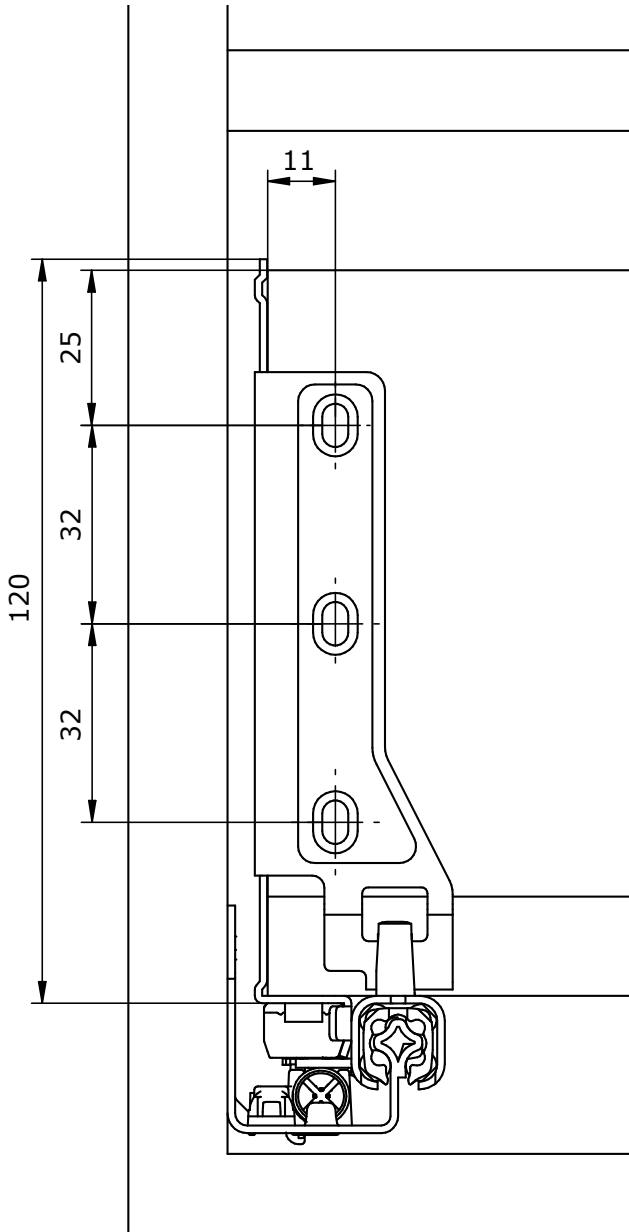


| Frame height<br>in mm | Nominal length<br>in mm | Sets/Box | Order number<br>Frames gray | Order number<br>Frames white |
|-----------------------|-------------------------|----------|-----------------------------|------------------------------|
| 120                   | 250                     | 1        | 2060009008350               | 2060009008351                |
| 120                   | 300                     | 1        | 2060009008356               | 2060009008357                |
| 120                   | 350                     | 1        | 2060009008362               | 2060009008363                |
| 120                   | 400                     | 1        | 2060009008368               | 2060009008369                |
| 120                   | 450                     | 1        | 2060009008374               | 2060009008375                |
| 120                   | 500                     | 1        | 2060009008380               | 2060009008381                |
| 120                   | 550                     | 1        | 2060009008386               | 2060009008387                |

3D view

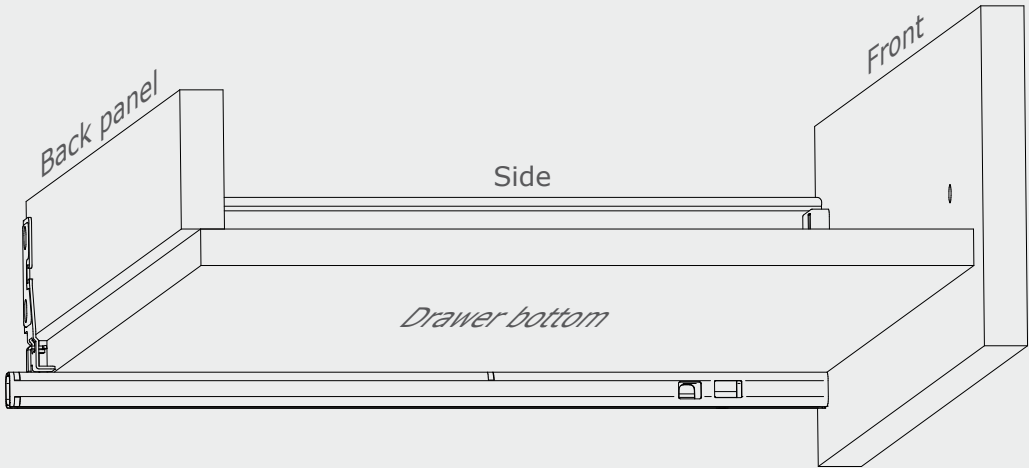

Cutting dimensions

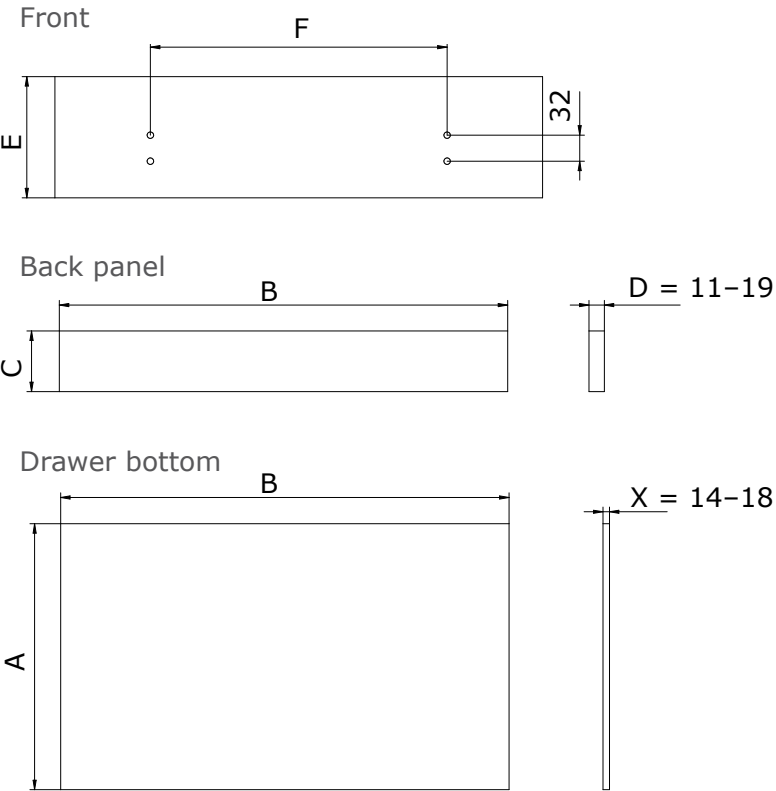

Calculations

- A = Nominal length - 10 mm
- B = Inside cabinet width - 14 mm
- C = Frame height - Bottom thickness (X) - 3 mm
- D = Back panel width = 11–19 mm
- E = Front height
- F = Inside cabinet width - 53 mm


Features

- Colors: gray and white
- Areas of application: Drawers and front pull-outs
- Material: steel
- Assembly: for screwing


Optional features

- Nominal length: 250 – 550 mm
- Frame height: 80 mm, 120 mm, 150 mm
- Inside cabinet width
- Single Extension Perfect (Load capacity 25 kg)
- Full Extension Extreme (Load capacity 30 kg)

Installation dimensions front with Perfect

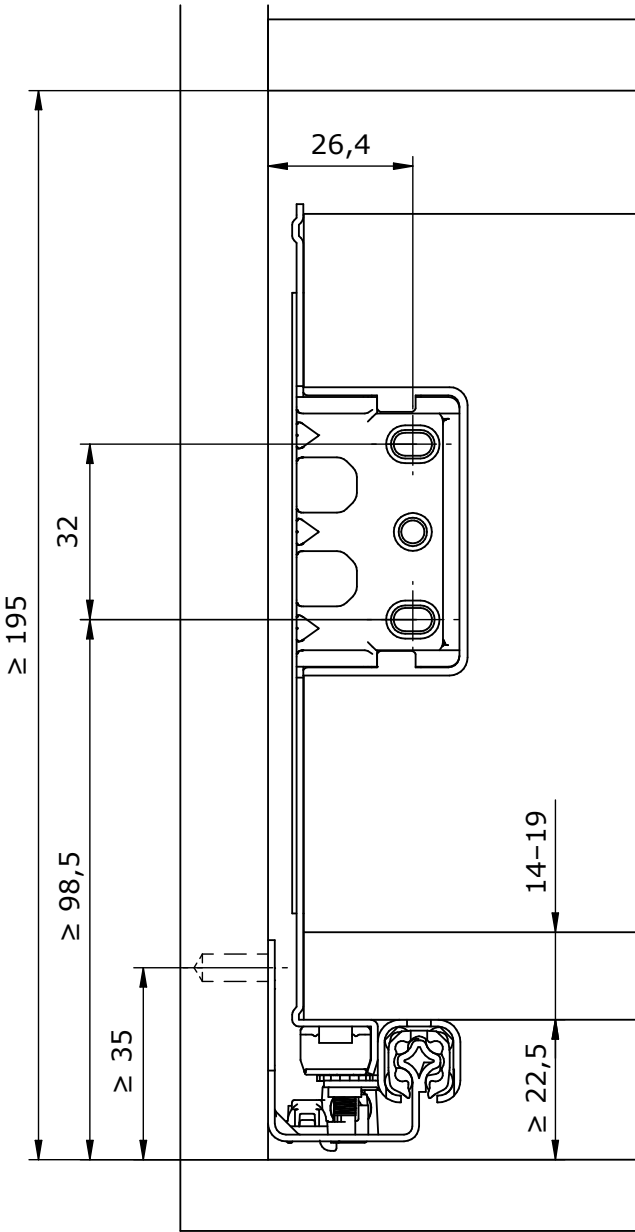

Installation dimensions back panel with Perfect

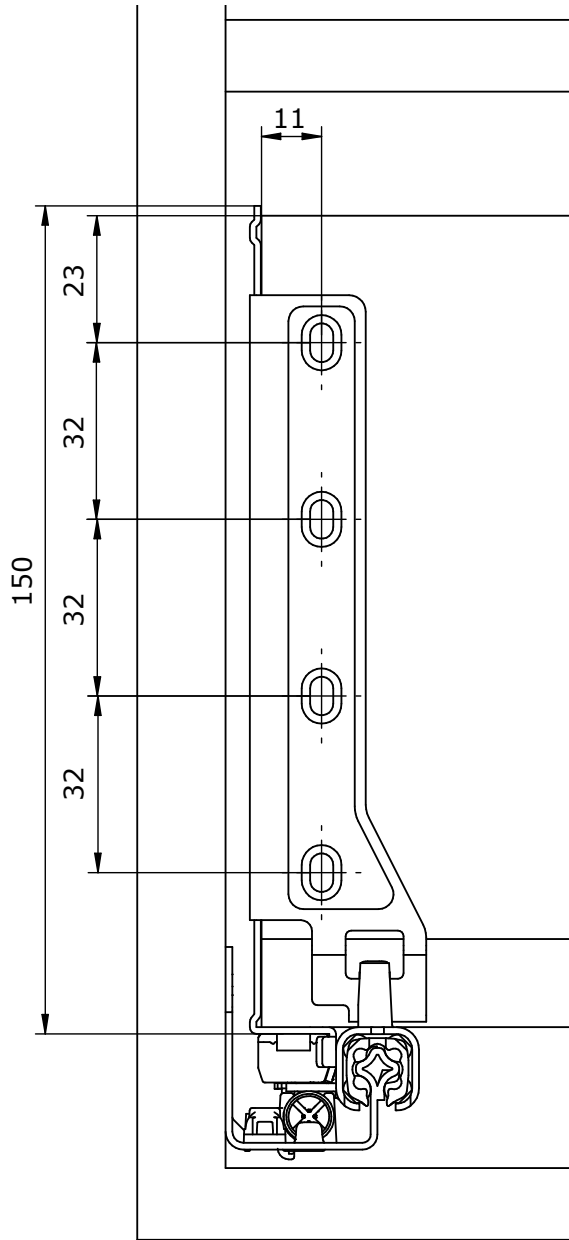

| Frame height<br>in mm | Nominal length<br>in mm | Sets/Box | Order number<br>Frames gray | Order number<br>Frames white |
|-----------------------|-------------------------|----------|-----------------------------|------------------------------|
| 150                   | 250                     | 1        | 2060009008352               | 2060009008353                |
| 150                   | 300                     | 1        | 2060009008358               | 2060009008359                |
| 150                   | 350                     | 1        | 2060009008364               | 2060009008365                |
| 150                   | 400                     | 1        | 2060009008370               | 2060009008371                |
| 150                   | 450                     | 1        | 2060009008376               | 2060009008377                |
| 150                   | 500                     | 1        | 2060009008382               | 2060009008383                |
| 150                   | 550                     | 1        | 2060009008388               | 2060009008389                |

Packaging

Packaging\_\_\_\_\_Page 142

Product

To provide our customers with a comprehensive range of services, we develop customized packaging solutions for our drawer slides.  
Using our self-designed, modern production facilities, we ensure that your slides are not only manufactured efficiently but also securely and optimally packaged.



Packaging services

Industrial packaging

Efficient and precise, ensuring maximum safety for your products.

Set packaging

Left and right slides packed together in one box. This saves space, optimizes logistics, and reduces shipping costs while simplifying product organization.

Strapping

Left and right slides strapped together – secure packaging with durable strapping.

Film wrapping

Protection and transparency – your slides are securely wrapped in film bags.

Packaging Optimization

Custom printing of your desired layout

For example logo, QR code or DataMatrix.

Label printing

For example serial numbers or production data.

Optimized layer configurations

- Best possible use of space
- Efficient and space-saving packaging solution
- Optimized transport and costs

Individualization

Another aspect of automation is packaging optimization, which allows customized adjustments to be seamlessly integrated into the packaging process. This includes custom printing of your desired layout with customer-specific elements such as logos, barcodes, QR codes, or DataMatrix to enhance brand identity and simplify logistics processes.

Additionally, we offer flexible label printing, enabling you to add specific information to your products, such as serial numbers, production data or other variable details. This ensures your packaging consistently meets current requirements and remains easy to track.

For products of varying lengths, we also provide optimized layer configurations, ensuring the best possible use of space during the packaging process. This facilitates an efficient and space-saving packaging solution that optimizes transport and reduces costs.

Our tailored solutions guarantee optimal protection for your products while meeting the demands of the modern market. Trust our expertise to deliver your packaging requirements at the highest standard.

Set packaging



Industrial packaging

White boxes for left-hand slides.

Brown boxes for roght-hand slides.



REME Möbelbeschläge GmbH  
Industriestraße 48  
D-33161 Hövelhof

+49 (0) 5257-9492920

[www.reme-gmbh.de](http://www.reme-gmbh.de)

[info@reme-gmbh.de](mailto:info@reme-gmbh.de)

[instagram.com/reme.gmbh](https://www.instagram.com/reme.gmbh)

[facebook.com/reme.gmbh](https://www.facebook.com/reme.gmbh)