


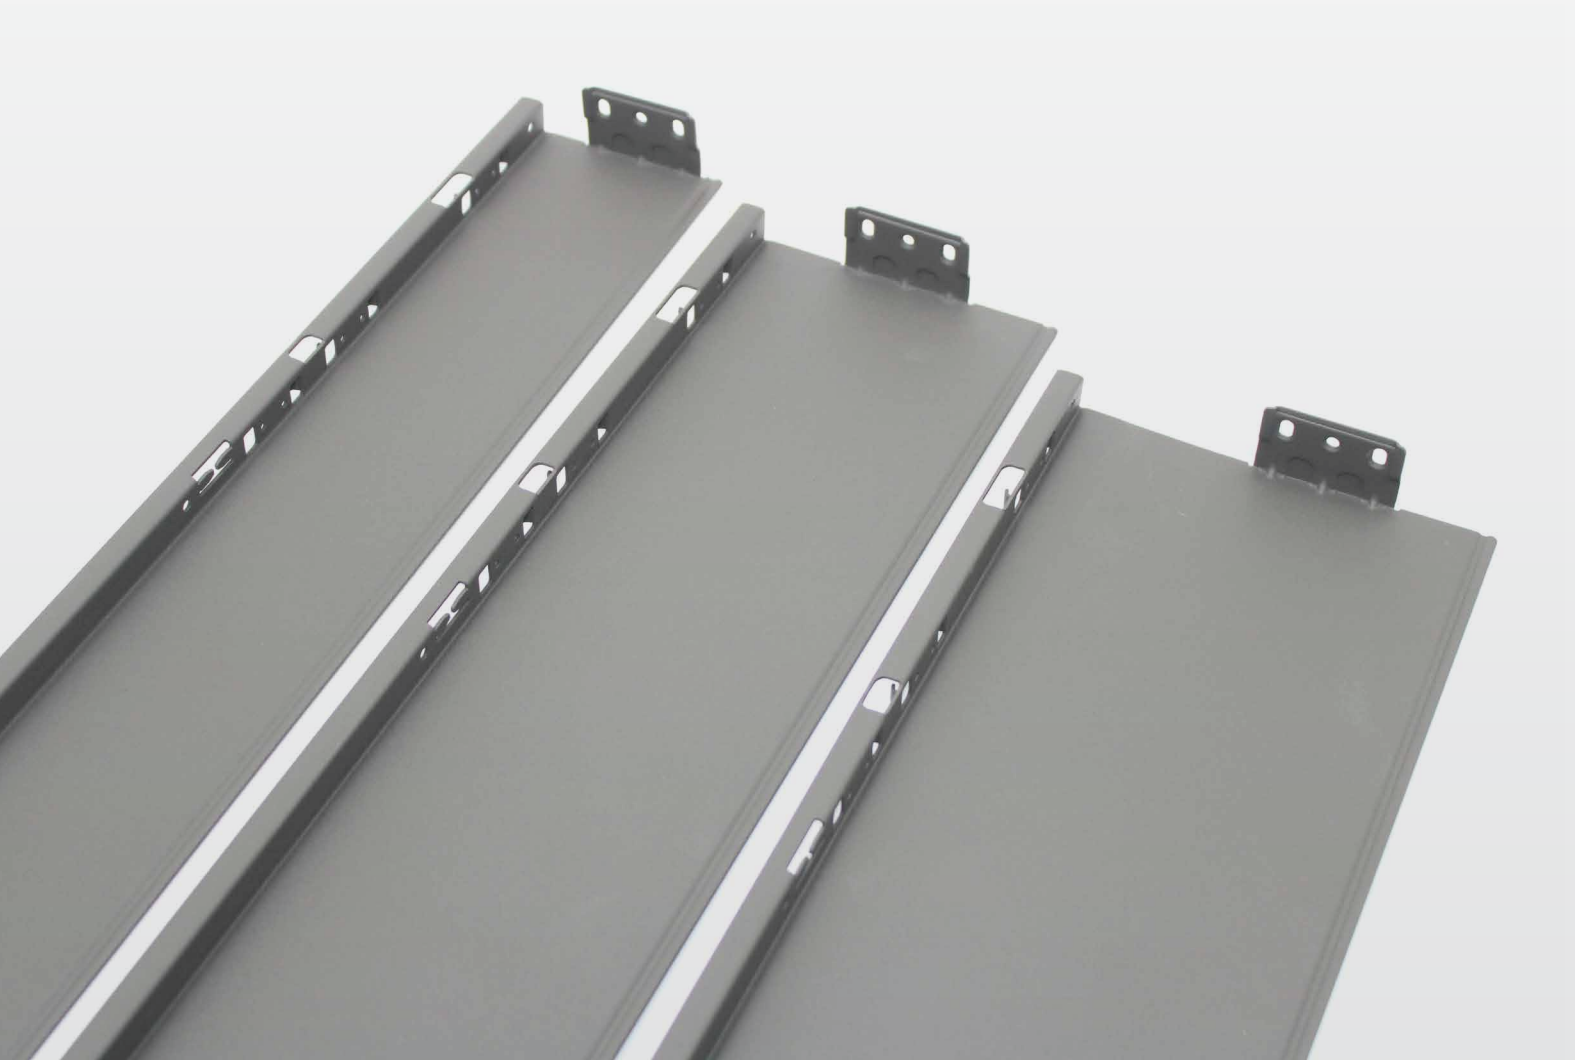

Frame runner system

Bottom thickness up to 14 mm, back panel continuous _____ Page 128

Bottom thickness 14–18 mm, bottom continuous _____ Page 134

Product

The drawer runner systems ensure precise guidance and high stability of drawers. These systems are not only functional and lightweight, but also make a significant contribution to the comfort and durability of furniture and constructions. The drawer system can be combined with the Perfect partial-extension runner and the Extreme full-extension runner.

The scope of delivery per set always includes one left and one right single-panel frame with back panel holder and front attachment as well as a pair of cover caps.

Ordering information

You can choose the drawer runner systems with the following runners

Single Extension Perfect

- Soft-Close and Plug-on assembly
- Stub, Soft-Close, Plug-on assembly and Lift Lock
- Offset hanging tab



Full Extension Extreme

- Soft-Close and Plug-on assembly

3D view




Cutting dimensions

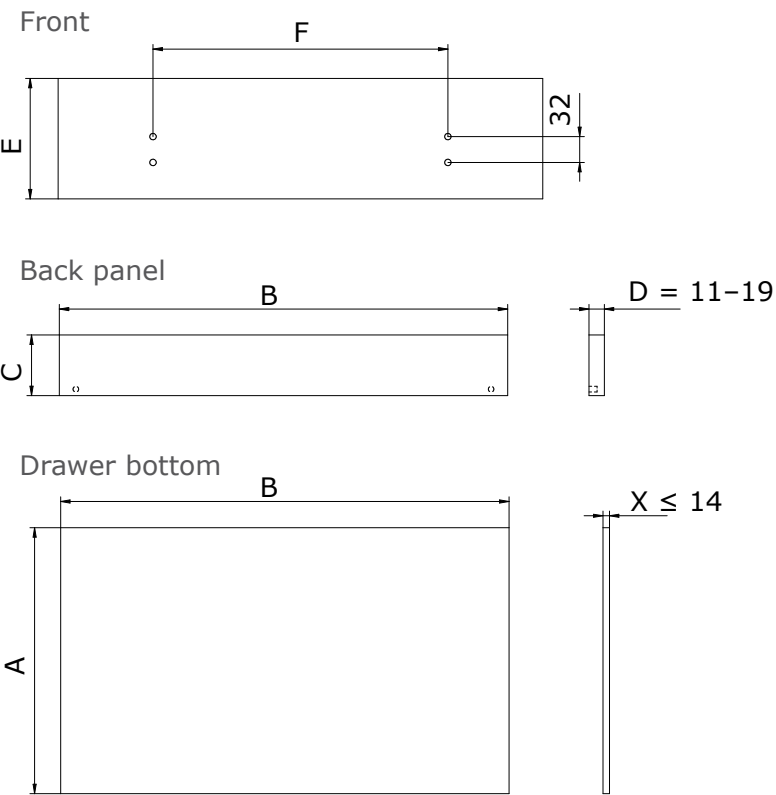


Calculations

- A = Nominal length - Back panel width (D) - 2 mm
- B = Inside cabinet width - 14 mm
- C = Frame height - 5 mm
- D = Back panel width = 11-19 mm
- E = Front height
- F = Inside cabinet width - 53 mm

Installation dimensions front with Perfect

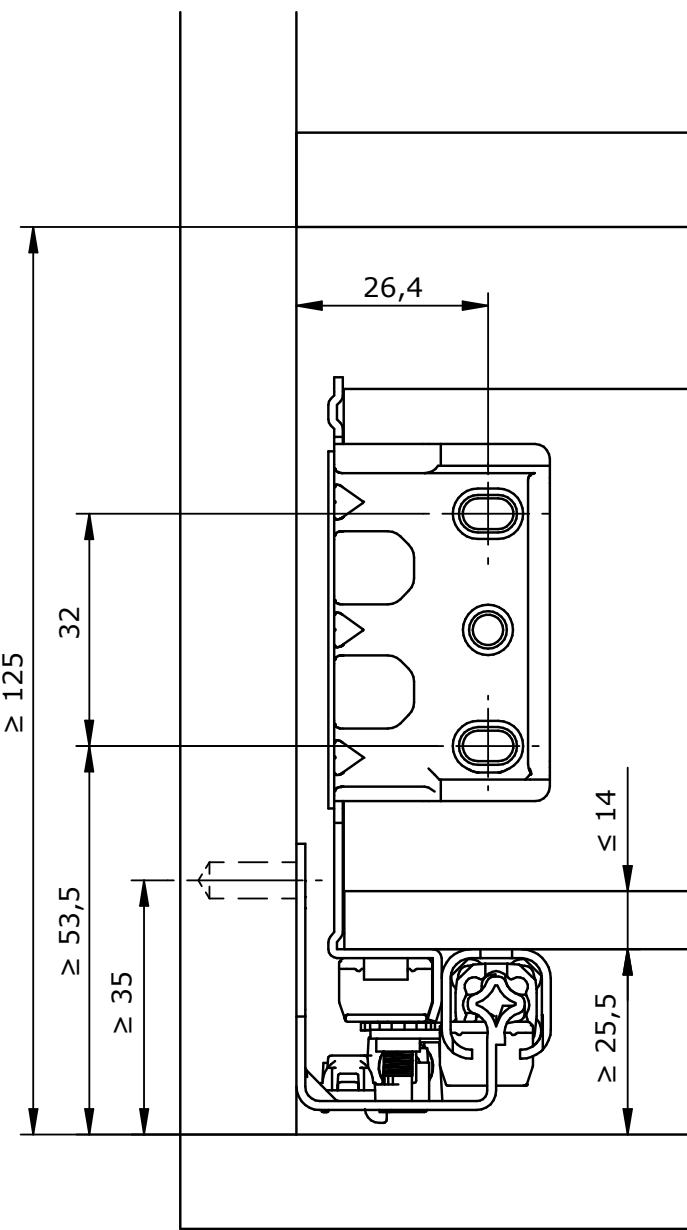

Installation dimensions back panel with Perfect

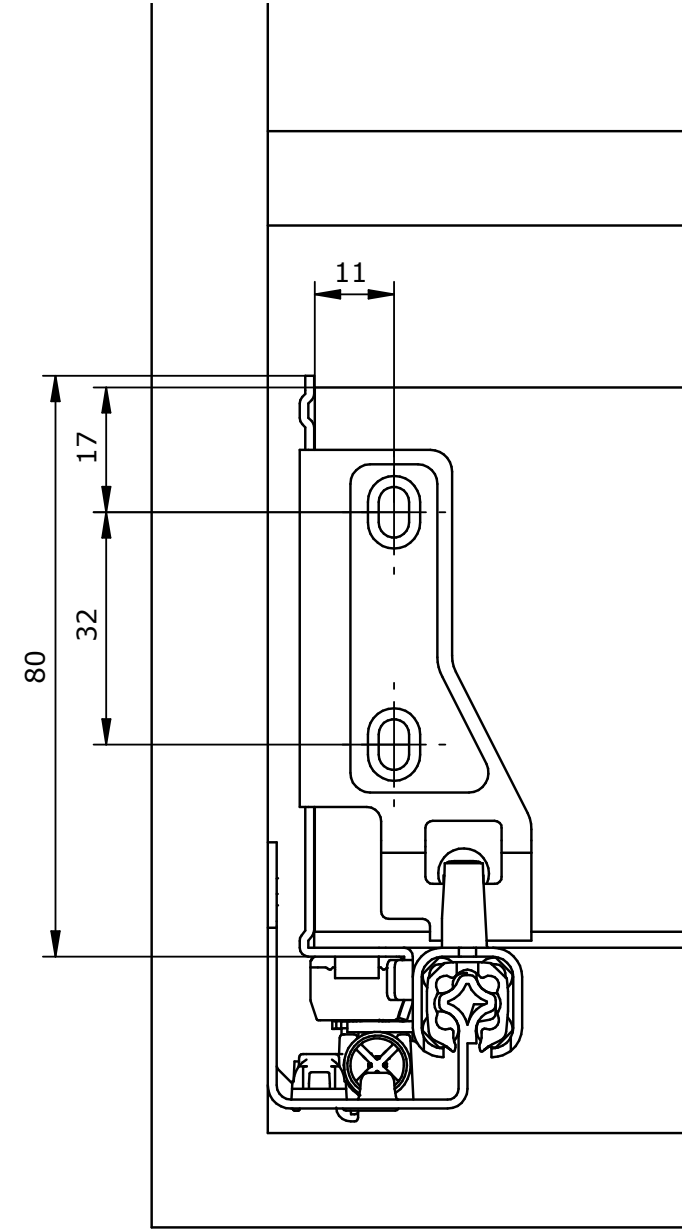

Features

- Colors: grey and white
- Areas of application: Drawers and front pull-outs
- Material: steel
- Assembly: for screwing

Optional features



- Nominal length: 250 – 550 mm
- Frame height: 80 mm, 120 mm, 150 mm
- Inside cabinet width
- Single Extension Perfect (Load capacity 25 kg)
- Full Extension Extreme (Load capacity 30 kg)

Frame height in mm	Nominal length in mm	Sets/Box	Order number Frames gray	Order number Frames white
80	250	1	2060009008348	2060009008349
80	300	1	2060009008354	2060009008355
80	350	1	2060009008360	2060009008361
80	400	1	2060009008366	2060009008367
80	450	1	2060009008372	2060009008373
80	500	1	2060009008378	2060009008379
80	550	1	2060009008384	2060009008385

3D view




Cutting dimensions

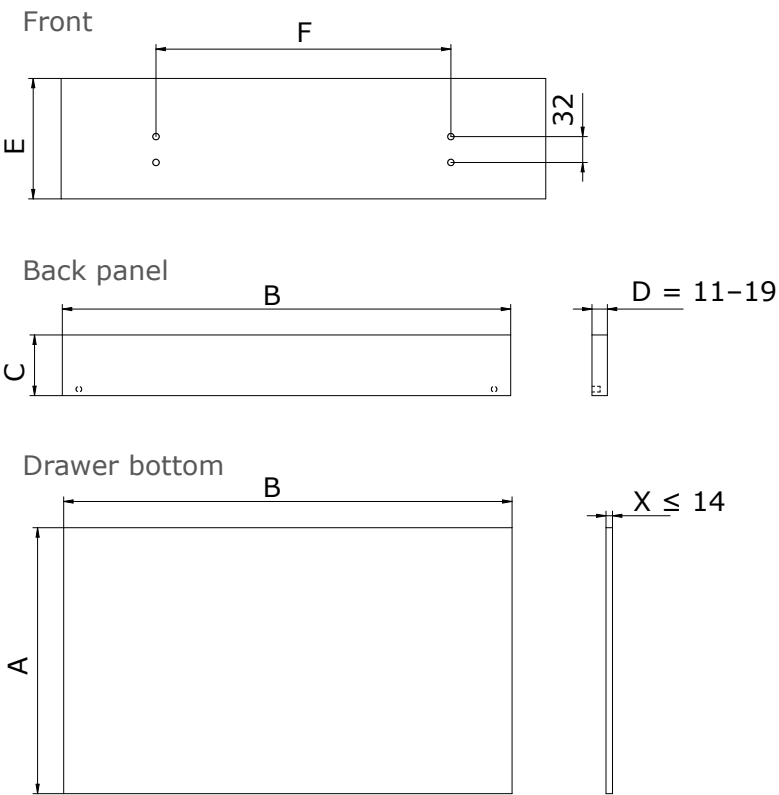


Calculations

- A = Nominal length - Back panel width (D) - 2 mm
- B = Inside cabinet width - 14 mm
- C = Frame height - 5 mm
- D = Back panel width = 11-19 mm
- E = Front height
- F = Inside cabinet width - 53 mm

Installation dimensions front with Perfect

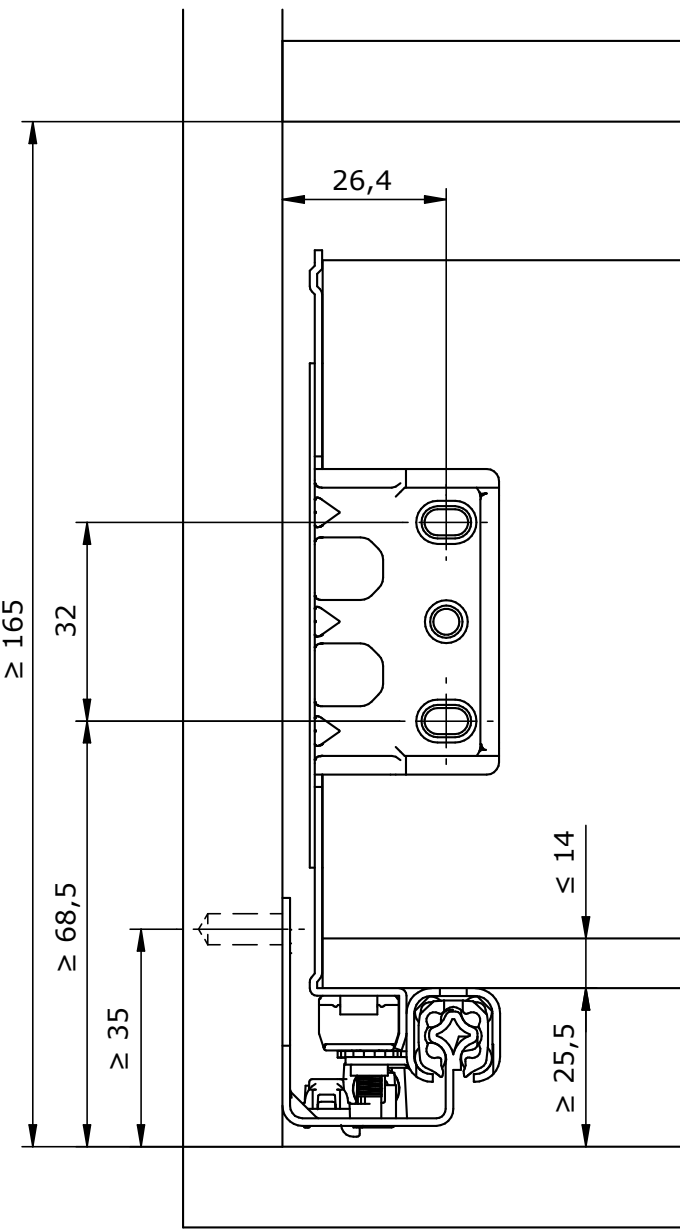

Installation dimensions back panel with Perfect

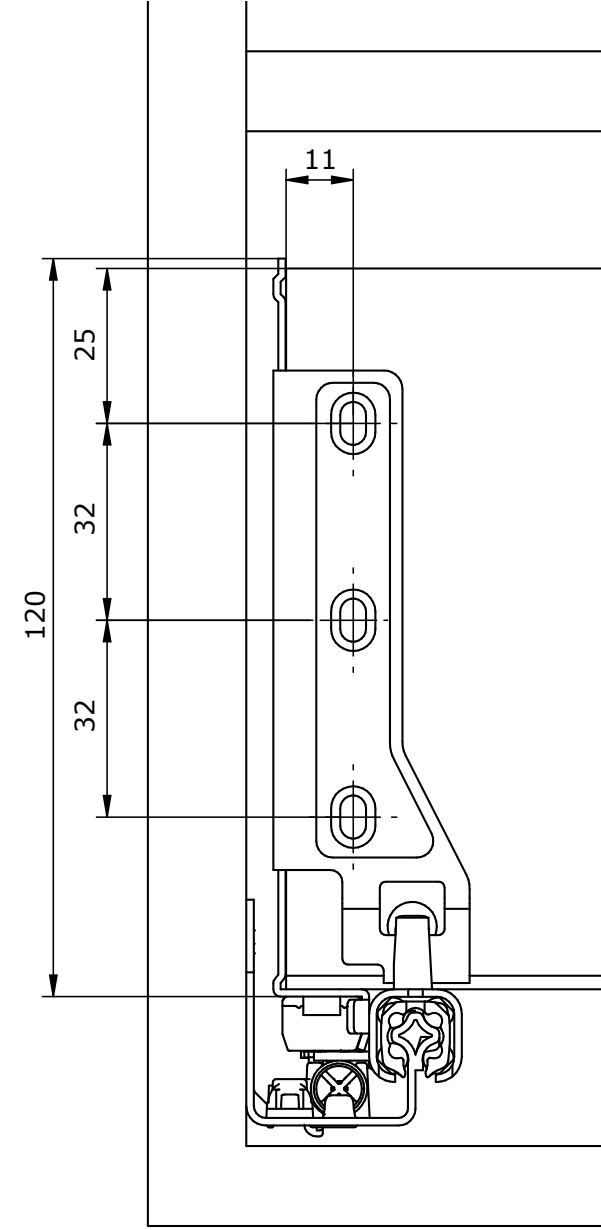

Features

- Colors: grey and white
- Areas of application: Drawers and front pull-outs
- Material: steel
- Assembly: for screwing

Optional features

- Nominal length: 250 – 550 mm
- Frame height: 80 mm, 120 mm, 150 mm
- Inside cabinet width
- Single Extension Perfect (Load capacity 25 kg)
- Full Extension Extreme (Load capacity 30 kg)

Frame height in mm	Nominal length in mm	Sets/Box	Order number Frames gray	Order number Frames white
120	250	1	2060009008350	2060009008351
120	300	1	2060009008356	2060009008357
120	350	1	2060009008362	2060009008363
120	400	1	2060009008368	2060009008369
120	450	1	2060009008374	2060009008375
120	500	1	2060009008380	2060009008381
120	550	1	2060009008386	2060009008387

Frame runner system

Bottom thickness up to 14 mm, back panel continuous



150



3D view



Cutting dimensions

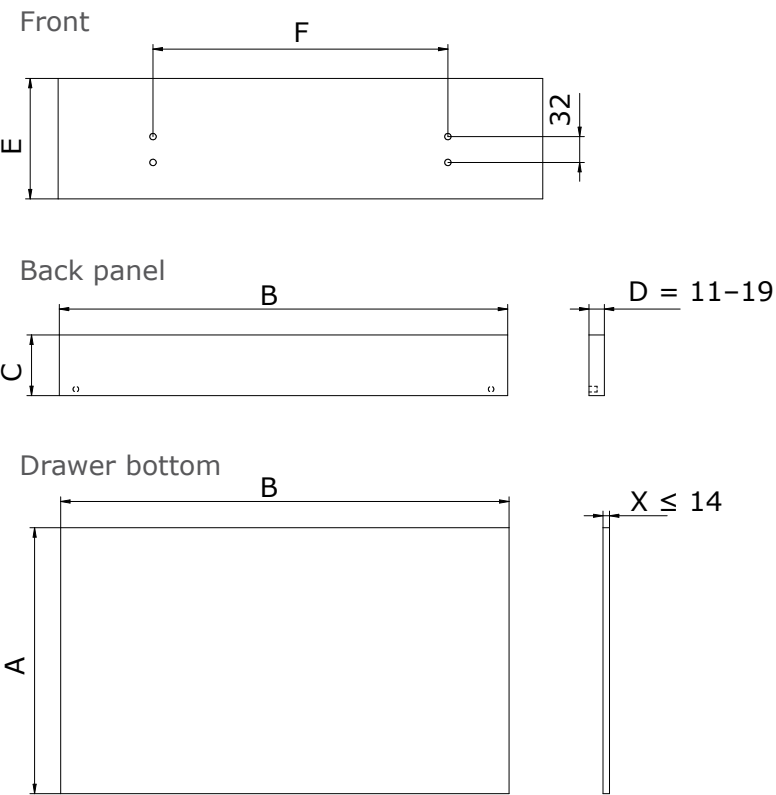

Calculations

- A = Nominal length - Back panel width (D) - 2 mm
- B = Inside cabinet width - 14 mm
- C = Frame height - 5 mm
- D = Back panel width = 11-19 mm
- E = Front height
- F = Inside cabinet width - 53 mm


Features

- Colors: grey and white
- Areas of application: Drawers and front pull-outs
- Material: steel
- Assembly: for screwing


Optional features

- Nominal length: 250 – 550 mm
- Frame height: 80 mm, 120 mm, 150 mm
- Inside cabinet width
- Single Extension Perfect (Load capacity 25 kg)
- Full Extension Extreme (Load capacity 30 kg)

Installation dimensions front with Perfect

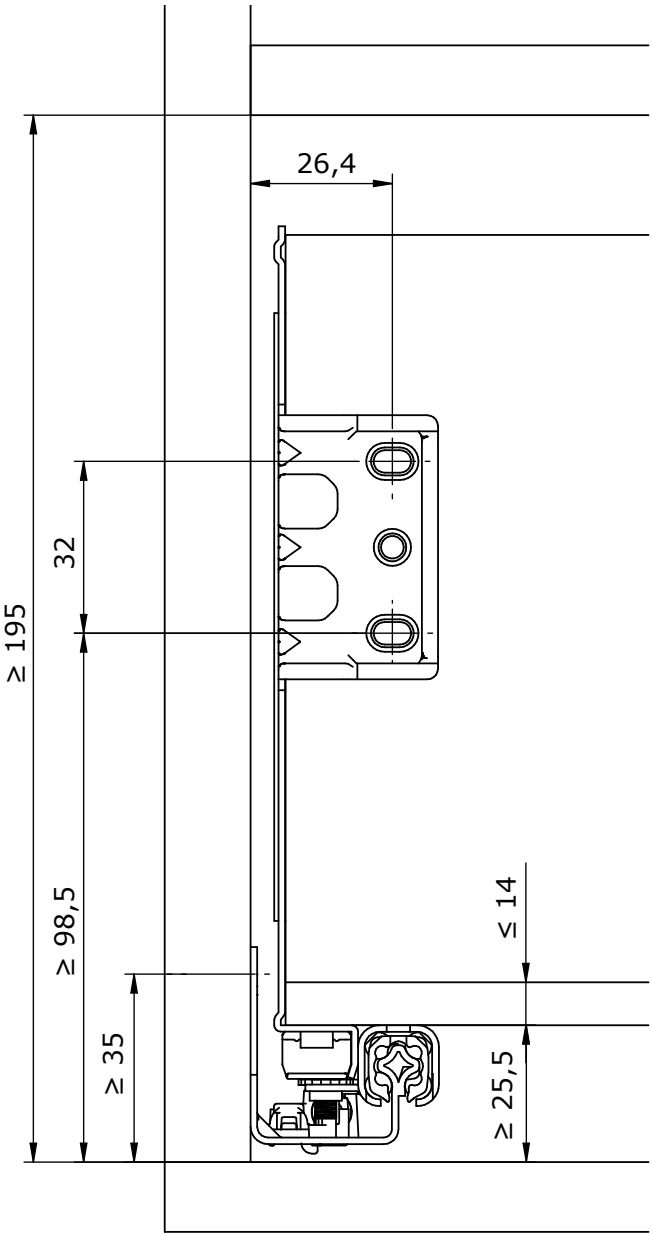


Installation dimensions back panel with Perfect

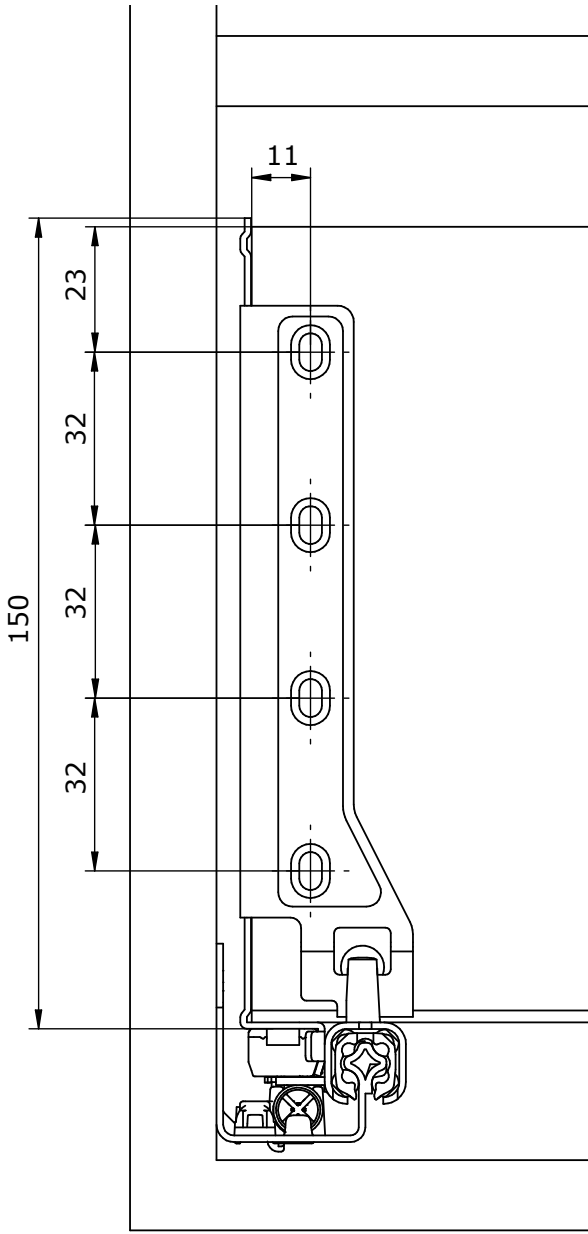


Frame height in mm	Nominal length in mm	Sets/Box	Order number Frames gray	Order number Frames white
150	250	1	2060009008352	2060009008353
150	300	1	2060009008358	2060009008359
150	350	1	2060009008364	2060009008365
150	400	1	2060009008370	2060009008371
150	450	1	2060009008376	2060009008377
150	500	1	2060009008382	2060009008383
150	550	1	2060009008388	2060009008389

3D view

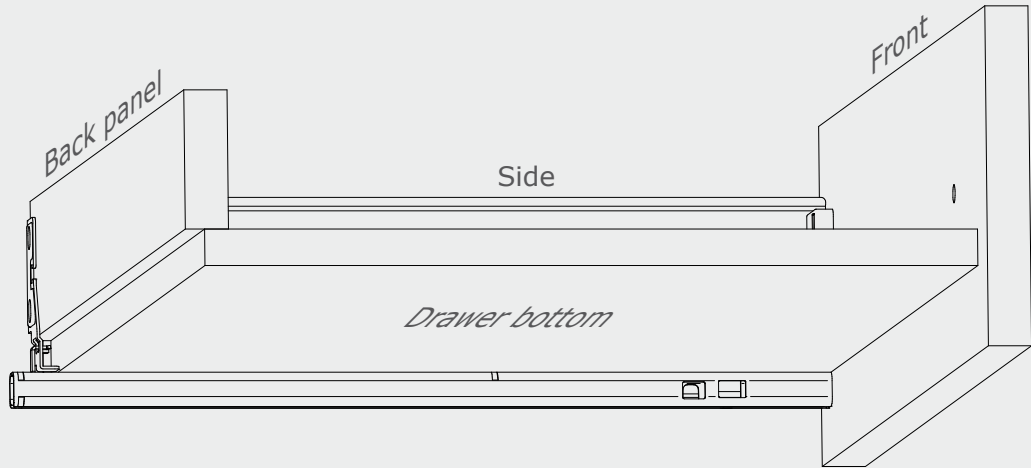

Cutting dimensions

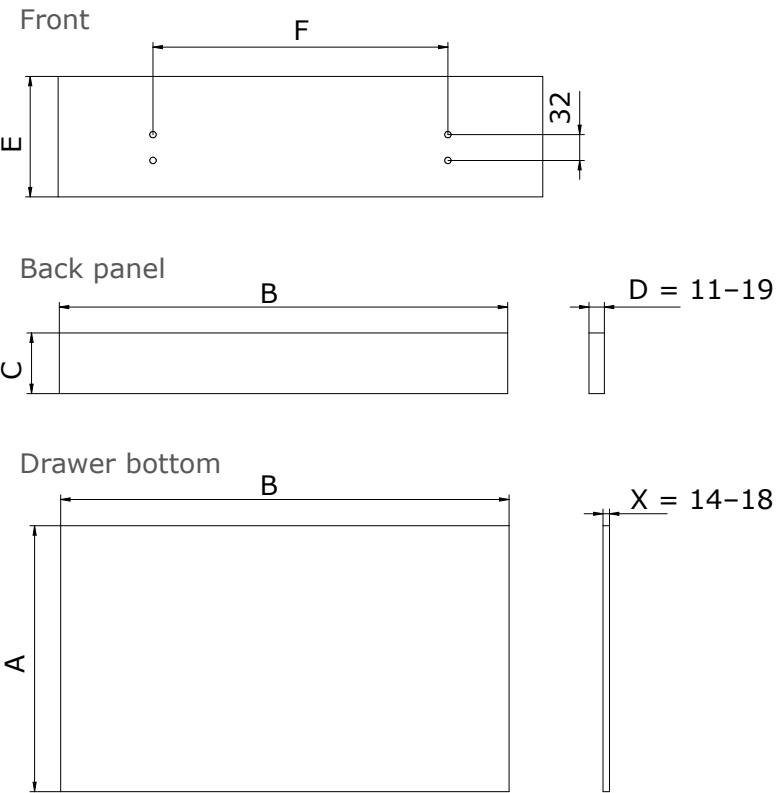

Calculations

- A = Nominal length - 10 mm
- B = Inside cabinet width - 14 mm
- C = Frame height - Bottom thickness (X) - 3 mm
- D = Back panel width = 11–19 mm
- E = Front height
- F = Inside cabinet width - 53 mm


Features

- Colors: gray and white
- Areas of application: Drawers and front pull-outs
- Material: steel
- Assembly: for screwing


Optional features

- Nominal length: 250 – 550 mm
- Frame height: 80 mm, 120 mm, 150 mm
- Inside cabinet width
- Single Extension Perfect (Load capacity 25 kg)
- Full Extension Extreme (Load capacity 30 kg)

Installation dimensions front with Perfect

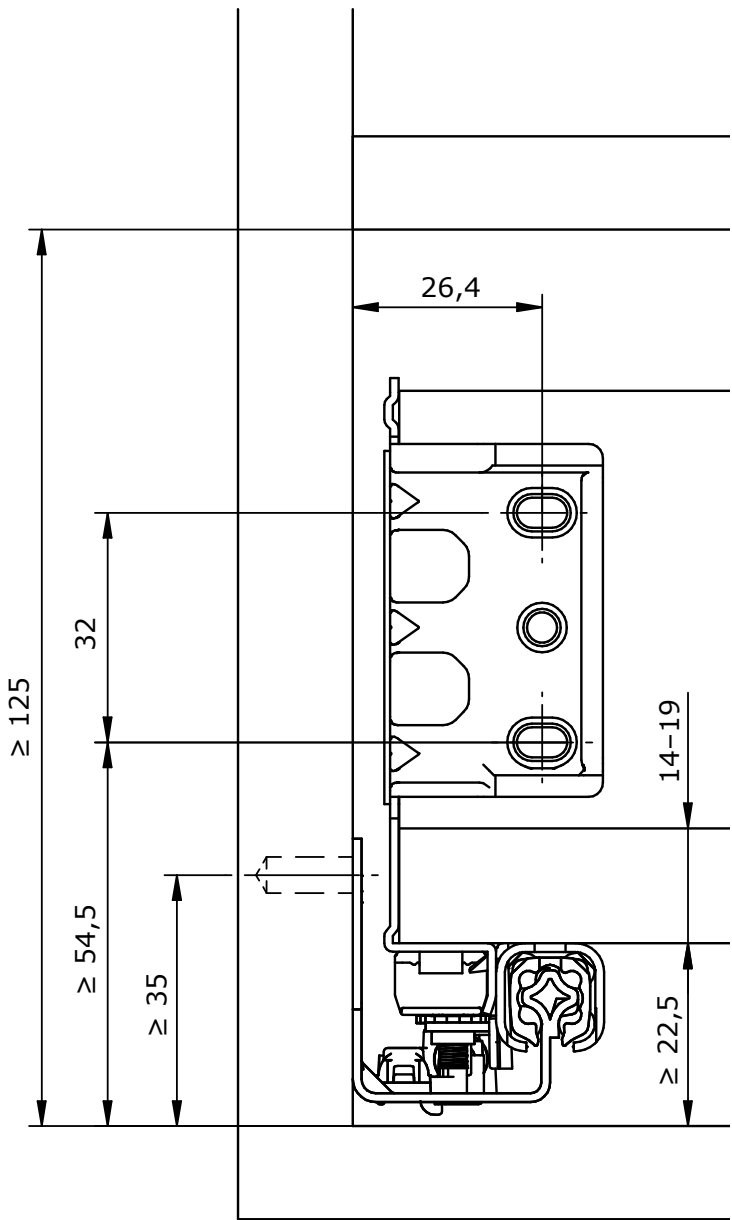


Installation dimensions back panel with Perfect

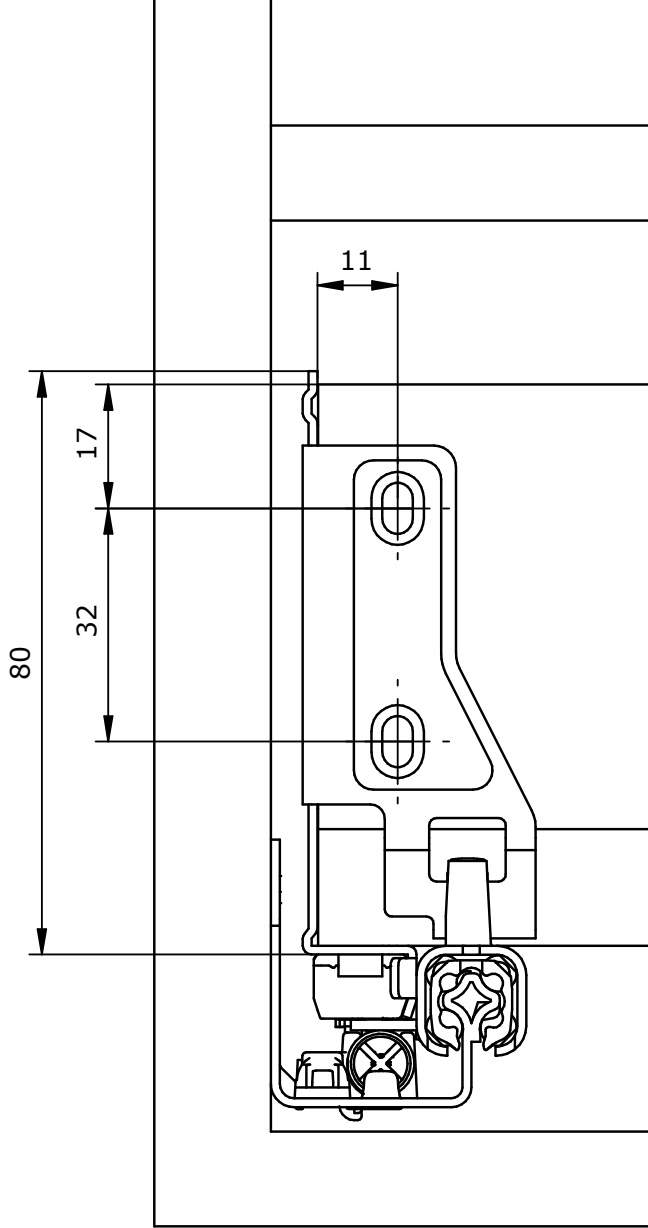


Frame height in mm	Nominal length in mm	Sets/Box	Order number Frames gray	Order number Frames white
80	250	1	2060009008348	2060009008349
80	300	1	2060009008354	2060009008355
80	350	1	2060009008360	2060009008361
80	400	1	2060009008366	2060009008367
80	450	1	2060009008372	2060009008373
80	500	1	2060009008378	2060009008379
80	550	1	2060009008384	2060009008385

3D view

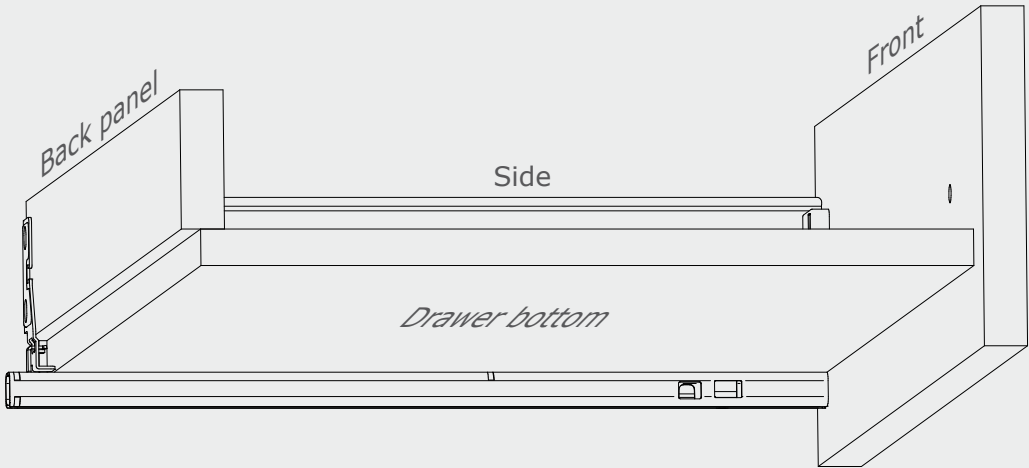


Cutting dimensions

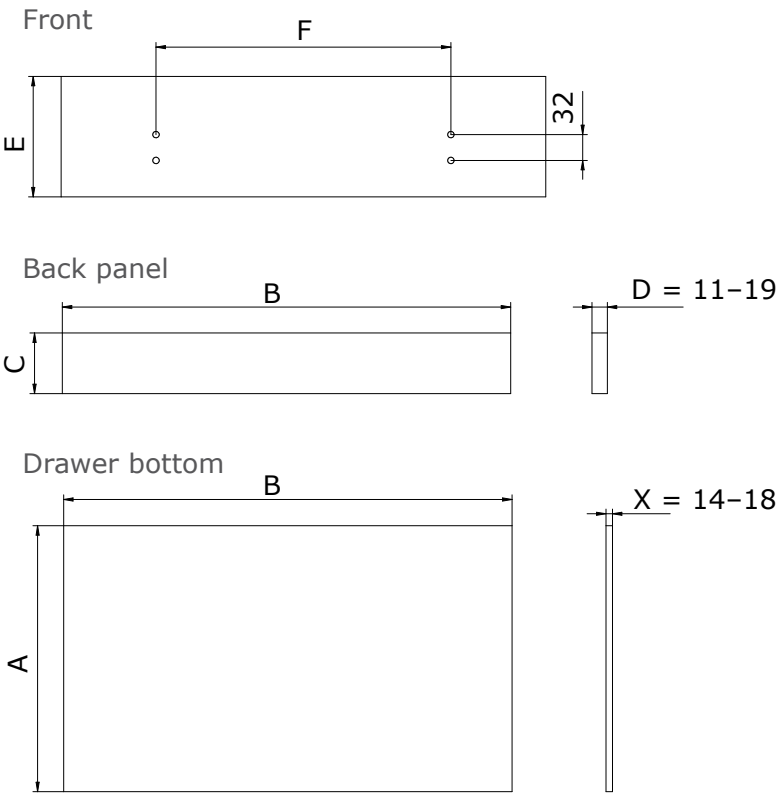


Calculations

- A = Nominal length - 10 mm
- B = Inside cabinet width - 14 mm
- C = Frame height - Bottom thickness (X) - 3 mm
- D = Back panel width = 11–19 mm
- E = Front height
- F = Inside cabinet width - 53 mm

Installation dimensions front with Perfect

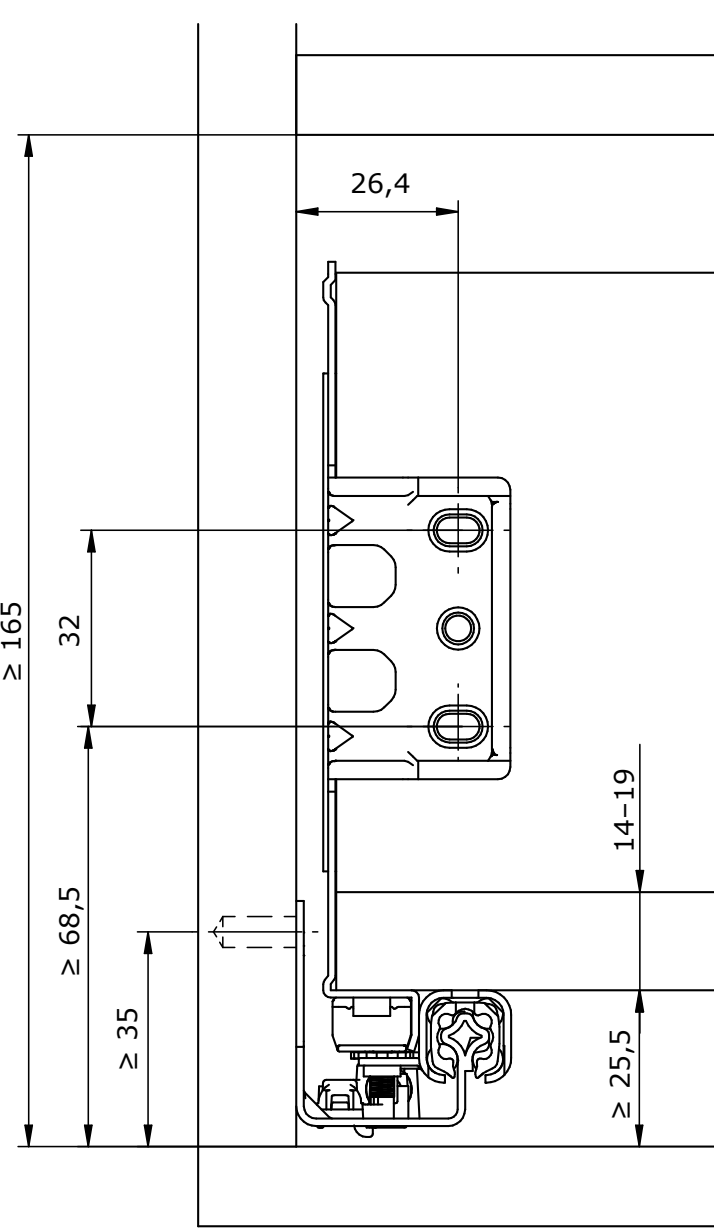

Installation dimensions back panel with Perfect

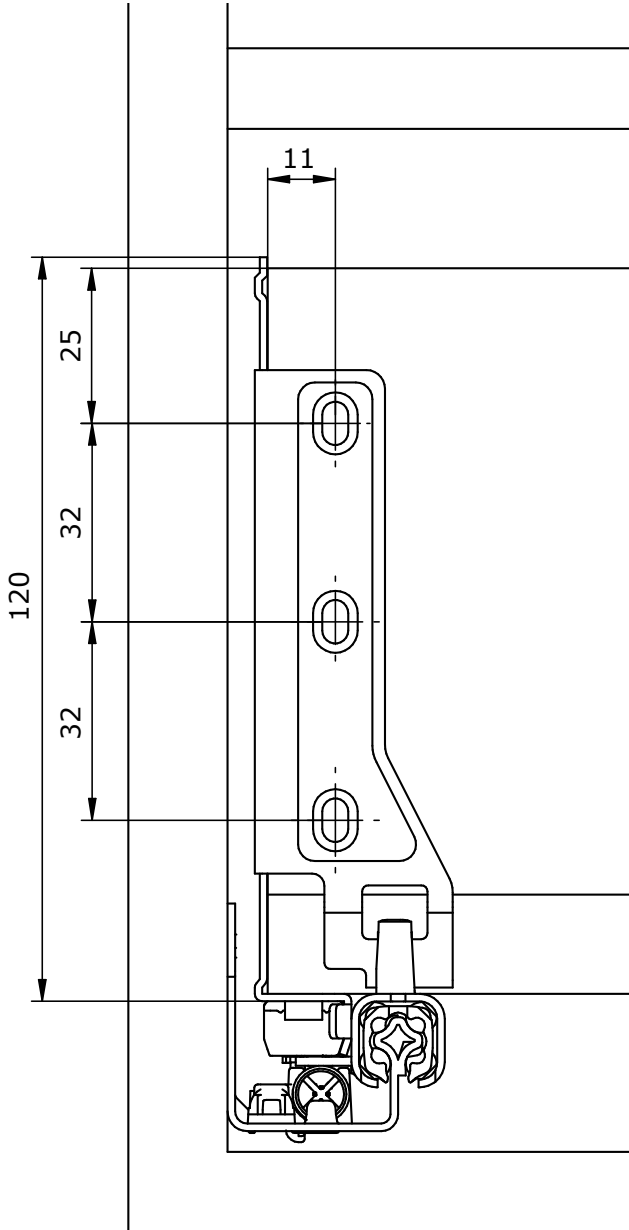

Features


- Colors: gray and white
- Areas of application: Drawers and front pull-outs
- Material: steel
- Assembly: for screwing

Optional features


- Nominal length: 250 – 550 mm
- Frame height: 80 mm, 120 mm, 150 mm
- Inside cabinet width
- Single Extension Perfect (Load capacity 25 kg)
- Full Extension Extreme (Load capacity 30 kg)

Frame height in mm	Nominal length in mm	Sets/Box	Order number Frames gray	Order number Frames white
120	250	1	2060009008350	2060009008351
120	300	1	2060009008356	2060009008357
120	350	1	2060009008362	2060009008363
120	400	1	2060009008368	2060009008369
120	450	1	2060009008374	2060009008375
120	500	1	2060009008380	2060009008381
120	550	1	2060009008386	2060009008387

3D view

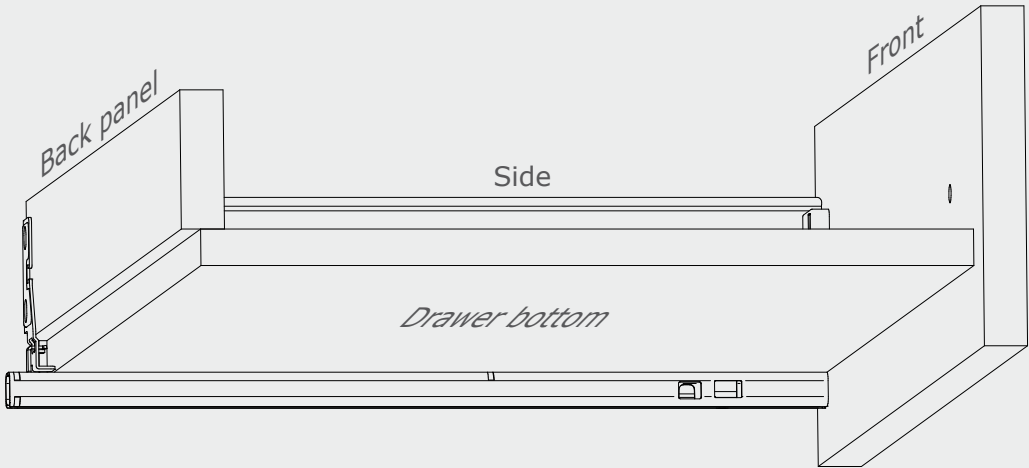

Cutting dimensions

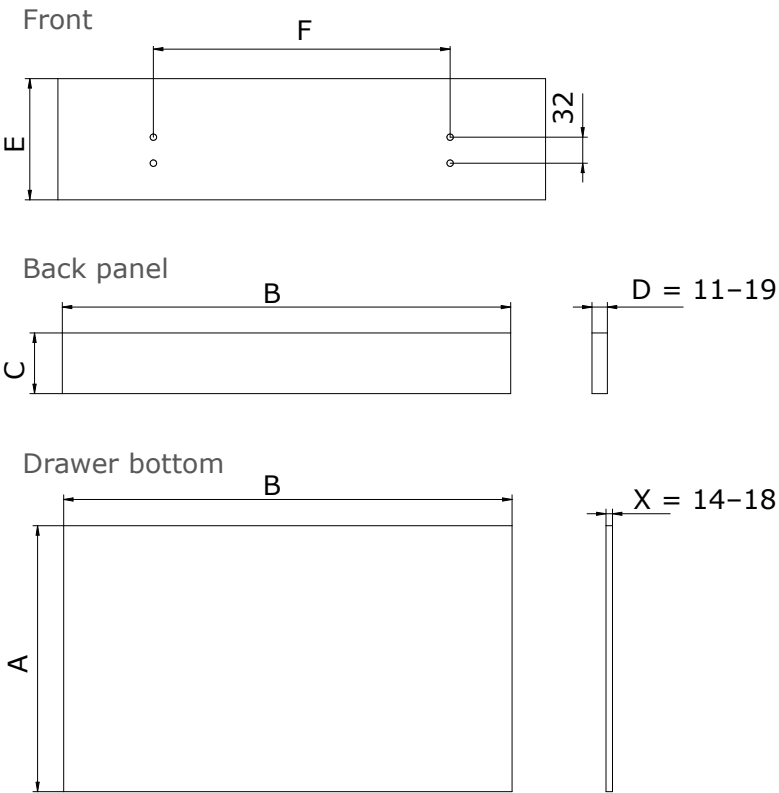

Calculations

- A = Nominal length - 10 mm
- B = Inside cabinet width - 14 mm
- C = Frame height - Bottom thickness (X) - 3 mm
- D = Back panel width = 11–19 mm
- E = Front height
- F = Inside cabinet width - 53 mm


Features

- Colors: gray and white
- Areas of application: Drawers and front pull-outs
- Material: steel
- Assembly: for screwing


Optional features

- Nominal length: 250 – 550 mm
- Frame height: 80 mm, 120 mm, 150 mm
- Inside cabinet width
- Single Extension Perfect (Load capacity 25 kg)
- Full Extension Extreme (Load capacity 30 kg)

Installation dimensions front with Perfect

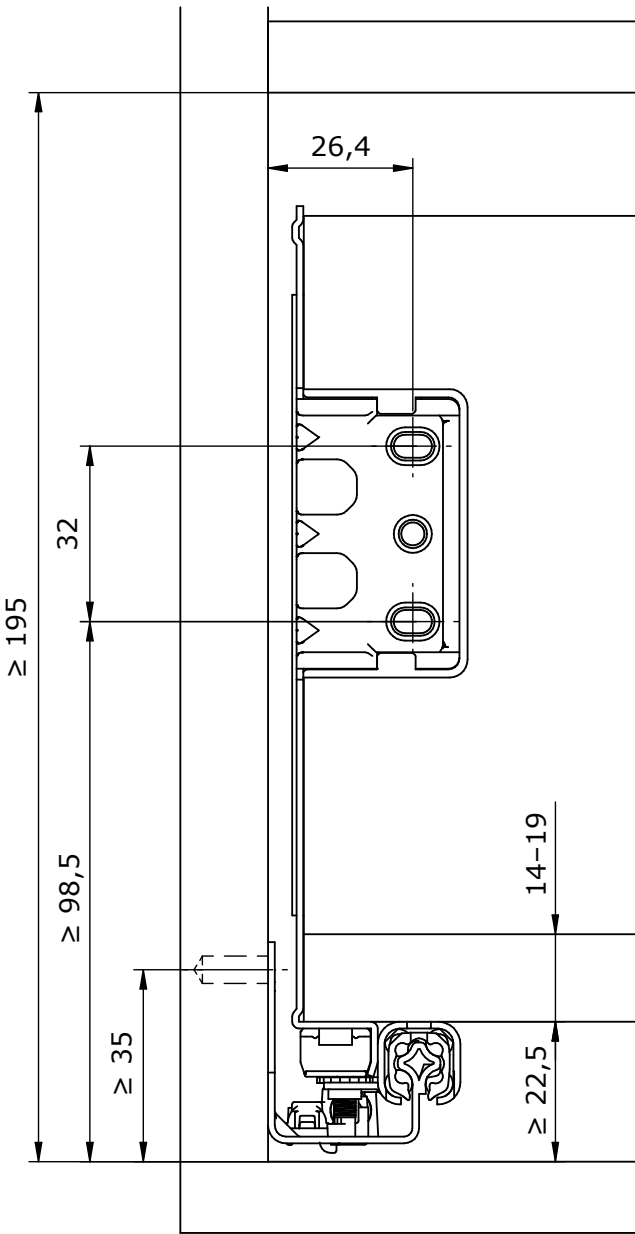

Installation dimensions back panel with Perfect

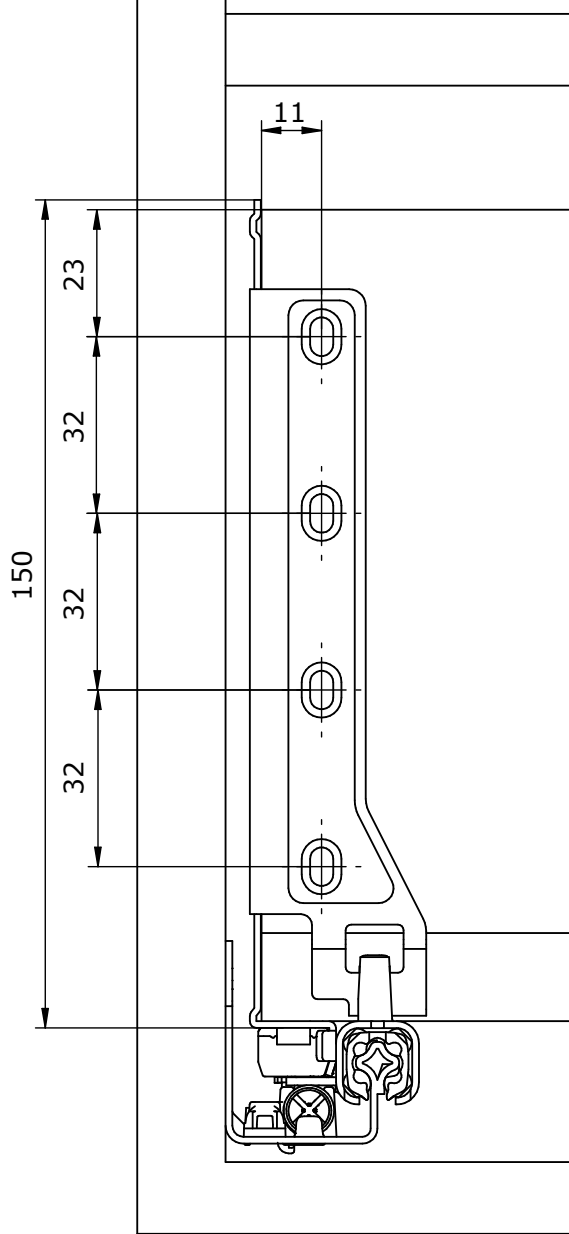

Frame height in mm	Nominal length in mm	Sets/Box	Order number Frames gray	Order number Frames white
150	250	1	2060009008352	2060009008353
150	300	1	2060009008358	2060009008359
150	350	1	2060009008364	2060009008365
150	400	1	2060009008370	2060009008371
150	450	1	2060009008376	2060009008377
150	500	1	2060009008382	2060009008383
150	550	1	2060009008388	2060009008389